

FINAL
DRAFT

INTERNATIONAL
STANDARD

ISO/FDIS
21640

ISO/TC 300

Secretariat: SFS

Voting begins on:
2021-02-03

Voting terminates on:
2021-03-30

Solid recovered fuels — Specifications and classes

Combustibles solides de récupération — Spécifications et classes

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/FDIS 21640

<https://standards.iteh.ai/catalog/standards/sist/76171464-b489-428b-91f5-823e12b6299c/iso-fdis-21640>

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

ISO/CEN PARALLEL PROCESSING



Reference number
ISO/FDIS 21640:2021(E)

© ISO 2021

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/FDIS 21640

<https://standards.iteh.ai/catalog/standards/sist/76171464-b489-428b-91f5-823e12b6299c/iso-fdis-21640>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Symbols and abbreviations	2
5 Principles	2
6 Classification	2
7 Specifications	3
7.1 General.....	3
7.2 Origin.....	4
7.3 Traded forms of solid recovered fuels.....	6
7.4 Properties obligatory to specify.....	7
7.5 Properties non-obligatory to specify.....	8
8 Compliance rules	9
8.1 Compliance rules for classification.....	9
8.1.1 General compliance rules.....	9
8.1.2 Start-up or considerable changes in the production.....	10
8.1.3 Exemptions.....	10
8.2 Compliance rules for specification.....	10
8.2.1 General compliance rules.....	10
8.2.2 Exemptions.....	11
9 Requirements and declaration of conformity	11
Annex A (normative) Template for the specification of solid recovered fuels	12
Annex B (informative) Fuel preparation	14
Annex C (informative) Template for declaration of conformity	16
Annex D (informative) Calculation of standard deviation, median and 80th percentile	18
Annex E (informative) Examples of establishing of compliance with SRF classification	20
Annex F (informative) Examples of establishing of compliance with SRF specification	23
Bibliography	25

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 300 *Solid recovered fuels*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The objective of this document is to provide a common classification and specification system for solid recovered fuels (SRF) to enable efficient trading of SRF, to promote their safe use in energy conversion activities and to increase the public trust. The document will facilitate a good understanding between seller and buyer, facilitate purchase, trans border movements, use and supervision as well as an effective communication with equipment manufacturers. The classification and specification system support authority permission procedures and ease the reporting on environmental issues.

SRF are produced from non-hazardous waste. The input waste can be production specific waste, municipal solid waste, industrial waste, commercial waste, construction and demolition waste, sewage sludge etc. It is thus obvious that SRF are a heterogeneous group of fuels. A well-defined system for classification and specification is therefore of significant importance to reach the above-mentioned objectives and intentions.

This document covers all types of SRF and will thus have a wide field of application. The aim of producing a solid recovered fuel is to use it for energy purposes at the highest possible energy efficiency.

This document describes the compliance rules for SRF according to this classification system. Classification enables statistical information of SRF properties in the market, thus increasing transparency in the use of non-hazardous waste in SRF and demonstrating development of this business field.

This document also describes how the supplier can establish specifications and a declaration of conformity to the different ISO standards for SRF.

It is important to emphasise that despite the standardisation of SRF, the standard should not be interpreted as end-of-waste criteria. Such criteria can be set at national or regional levels, but then in legislation and not in this document. Also, it should be noted that the waste used for the SRF production should be such waste streams that are not suitable for re-use, preparation for re-use or efficient material recycling.

<https://standards.iteh.ai/catalog/standards/sist/76171464-b489-428b-91f5-827131678c1d/iso-fdis-21640>
Figure 1 illustrates a simplified flow chain for SRF, from input of non-hazardous waste to end use of SRF. This document has an interface to all the stages in the chain, from point of acceptance to point of delivery. The fuel is not considered an SRF until it is specified and classified according to this document. Requirements for how the input waste is collected and how to use the fuel are not part of this document.

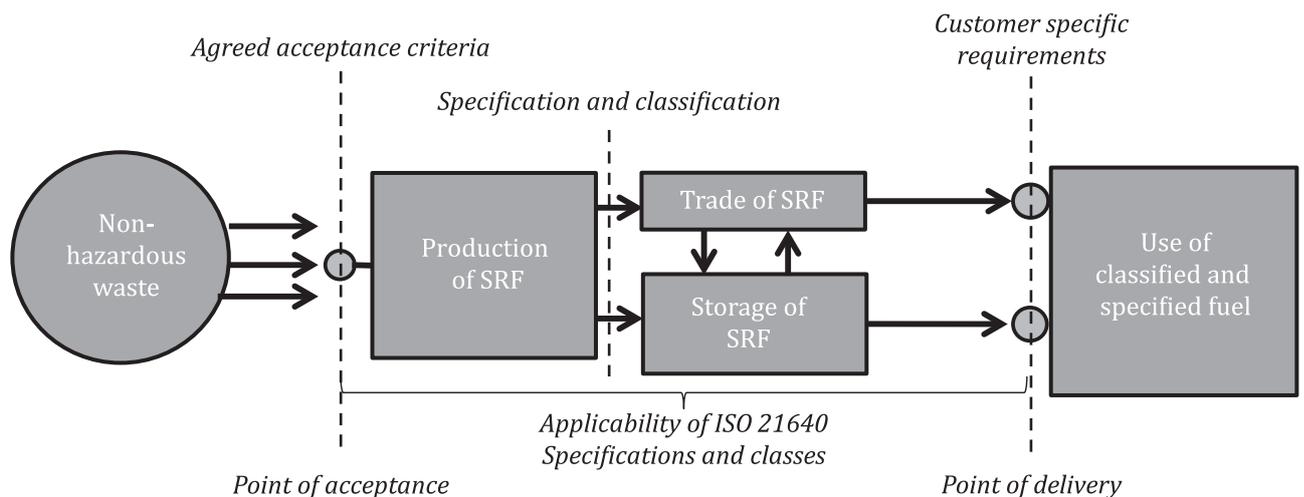


Figure 1 — Solid recovered fuels chain - This document on specifications and classes is applicable after production up to the point of delivery

NOTE This document is applicable to trading and storage of SRF. However, if during storage or trade the SRF is mixed with other SRF or other fuels, then the classification and specifications are no longer valid. If sold further, then the mixing would constitute an SRF production.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/FDIS 21640

<https://standards.iteh.ai/catalog/standards/sist/76171464-b489-428b-91f5-823e12b6299c/iso-fdis-21640>

Solid recovered fuels — Specifications and classes

1 Scope

This document specifies a classification system for solid recovered fuels (SRF), and a template containing a list of characteristics for the specification of their properties, enabling trade and use of SRF supporting the protection of the environment.

SRF are produced from non-hazardous waste.

NOTE 1 Untreated municipal solid waste as such cannot be considered SRF. Untreated municipal solid waste can however be feedstock to plants producing SRF.

NOTE 2 Chemically treated solid biofuels that do not contain halogenated organic compounds or heavy metals at levels higher than those in typical virgin material, can be defined as solid biofuels and thus be part of the standard series ISO 17225^[1].

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 21637, *Solid recovered fuels — Vocabulary*

ISO 21645,¹⁾ *Solid recovered fuels — Methods for sampling*

ISO 21654,²⁾ *Solid recovered fuels — Determination of calorific value*

ISO 21656,³⁾ *Solid recovered fuels — Determination of ash content*

ISO 21660-3,⁴⁾ *Solid recovered fuels — Determination of moisture content using the oven dry method — Part 3: Moisture in general analysis sample*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 21637 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

3.1

classification of solid recovered fuels

categorizing of solid recovered fuels into classes focusing on the key properties – NCV, Cl and Hg that are defined by boundary values

- 1) Under preparation. Stage at the time of publication ISO/FDIS 21645.
- 2) Under preparation. Stage at the time of publication ISO/FDIS 21654.
- 3) Under preparation. Stage at the time of publication ISO/FDIS 21656.
- 4) Under preparation. Stage at the time of publication ISO/FDIS 21660-3.

3.2 specification of solid recovered fuels

list of properties that characterizes solid recovered fuels

Note 1 to entry: Templates for such specifications are given in [Annex A](#) in this document.

4 Symbols and abbreviations

The symbols and abbreviations used in this document comply with the SI system of units as far as possible.

Table 1 — Symbols and abbreviations

Symbol	Item
(d)	dry (dry basis)
d_x (ar)	particle diameter where x denominates the share of particles passing through a sieve of that size as received
A	Designation for ash content on dry basis $A_{(d)}$ [w in mass]
ρ	Designation for bulk density as received [kg/m ³]
M	Designation for moisture content as received on wet basis, M_{ar} [% in mass]
P	Designation for the particle size of the main fraction (> 95 % in mass) related to size intervals.
NCV	Designation for net calorific value as received, $q_{p, net, ar}$ [MJ/kg or kWh/kg or MWh/t] at constant pressure
VM	Designation for volatile matter on dry basis [% in mass]

NOTE 1 MJ/kg equals 0,277 8 kWh/kg (1 kWh/kg equals 1 MWh/t and 1 MWh/t are 3,6 MJ/kg). 1 g/cm³ equals 1 kg/dm³. 1 mg/kg equals 0,000 1 % in mass. [ISO/FDIS 21640](#)

<https://standards.iteh.ai/catalog/standards/sist/76171464-b489-428b-91f5-823e12b6299c/iso-fdis-21640>

5 Principles

The classification system is based on three important characteristics, referred to as the main SRF characteristics: an economic characteristic (net calorific value), a technical characteristic (chlorine content) and an environmental characteristic (mercury content). The characteristics are chosen to give a stakeholder an immediate but simplified picture of the fuel in question.

The classes also impose limitations on what can be called SRF restricting it with a minimum net calorific value as well as maximum values of chlorine and mercury. Fuel outside the ranges of the classes shall not be defined as SRF.

Only fuels derived from non-hazardous waste that meet the SRF ISO Standards can be classified as SRF.

The classification itself is not enough for an intending user or other stakeholders. The level of detailed information needed depend on several different factors. Such factors can be; the end use of the SRF, legislative demands, character of the input material, and the technology used either in production or end use of the SRF. Relevant fuel properties are thus to be given in the specification of the SRF. Some of the fuel properties are deemed so important that they are obligatory to specify whereas others can be recorded voluntarily, e.g. upon request of the user.

It is important that SRF meet specified quality requirements which are to be determined based on a defined lot size by a minimum number of measurements.

6 Classification

The classification system ([Table 2](#)) for SRF is based on limit values for three important fuel characteristics. These are the net calorific value (NCV); chlorine content (Cl); mercury content (Hg).

Due to the statistical distribution pattern of the characteristics the values shall be presented as:

- NCV (ar) mean (arithmetic);
- Cl (d) mean (arithmetic);
- Hg (ar) median and 80th percentile

The average, median, and percentiles are determined on the quantity of SRF as specified in [Clause 8](#).

NOTE 1 80th percentile is the value on or below which 80 % of the observations fall.

Not all kinds of SRF are suited for all types of energy recovery installation, see CEN/TR 15508^[2].

Each of the classification characteristic is divided into 5 classes. The SRF should be assigned a class number from 1 to 5 for each characteristic. A combination of the class numbers makes up a class code (see example below). The characteristics should be considered as equal important and thus no single class number determines the code. The class code shall be included in the specification as described in [Clause 9](#).

For mercury, the higher of the two statistical values (median and 80th percentile) in a Hg data set determines the class.

EXAMPLE An SRF with a median value of 0,03 and 80th percentile value of 0,07 belongs to Hg class 3 (according to [Table 2](#)).

NOTE 2 The performances of the plant where SRF is used are depending on the properties of the SRF and more significantly on the design and operating conditions of such a plant.

NOTE 3 The limit values used for different classes must not be mixed up with limit values set by the competent authority in an environmental permit or other equally binding documents.

NOTE 4 The specific transfer factor for mercury of a given process and the proportion of SRF will determine which classes can be used. Examples of transfer factors for existing processes are given in CEN/TR 15508^[2].

Table 2 — Classification for solid recovered fuels

Classification characteristic	Statistical measure	Unit	Classes				
			1	2	3	4	5
Net calorific value (NCV)	Mean	MJ/kg (ar)	≥ 25	≥ 20	≥ 15	≥ 10	≥ 3
Chlorine (Cl)	Mean	% in mass (d)	≤ 0,2	≤ 0,6	≤ 1,0	≤ 1,5	≤ 3
Mercury (Hg)	Median	mg/MJ (ar)	≤ 0,02	≤ 0,03	≤ 0,05	≤ 0,10	≤ 0,15
	80 th percentile	mg/MJ (ar)	≤ 0,04	≤ 0,06	≤ 0,10	≤ 0,20	≤ 0,30

7 Specifications

7.1 General

The SRF shall be specified according to the template in [Annex A](#). [Annex A](#) consists of properties that are obligatory to specify. If the producer and the end user have agreed upon additional properties to be specified, those should be documented in a similar way.

For specification of the properties in [Annex A](#), determination shall be made according to ISO test methods for SRF (Technical specifications or regional/national standards can be used if no ISO test method is available). For additional properties, ISO test methods are recommended but other relevant methods can be used. If other methods are used, it shall be stated in the (fuel) specification.

7.2 Origin

The specification of origin is based on the origin and source of waste input material as described in [Table 3](#). The material accepted for SRF production are those that are not suitable for material recycling. This can, as an example, include reject streams from packaging recycling/sorting. The main origin-based solid recovered groups are:

1. Non-hazardous industrial waste

There are several waste streams generated within industry and commerce that could be used to produce SRF. Different industrial sectors typically generate different kind of wastes, like manure from agriculture or fibre reject streams from pulp and paper industry. For this reason, there are several subcategories set up ([Table 3](#)). However packaging waste are generated in a lot of different industries and commerce operations. In this case they are often quite similar and are thus not specified for individual industries. In this post is also included the packaging materials from construction projects.

2. Non-hazardous construction and demolition waste

Construction waste and demolition waste differ from each other already because constructing means building something new while waste from demolition normally comes from old structures. In renovation projects, both construction and demolition typically take place simultaneously, and thus generates both types of waste. The waste from the construction and demolition industry used for SRF production are mainly different wood and plastic fractions although also bituminous mixtures considered as non-hazardous waste can be used. The possibility to source separate materials at construction and demolition sites can be limited thus often resulting in a mixed waste fraction.

3. Non-hazardous waste from waste management facilities

Waste received at waste management facilities are treated in diverse ways. It can be water treatment, composting, anaerobic treatment, sorting, crushing and densifying. When doing these treatments, the plants will end up with different waste streams aimed for recycling, recovery or disposal. Some of these can be used for the production of SRF.

4. Non-hazardous waste from material recycling facilities

During the recycling process, there will be material that does not fulfil the quality criteria. These reject streams can be potentially used for the production of SRF.

5. Non-hazardous municipal solid waste and similar non-hazardous commercial waste

Although an untreated mixed municipal waste stream could not be called SRF, it still can be sorted and used for the production of SRF. Municipal solid waste includes bulky waste and waste from gardens and parks as well as waste from markets. Source separated material streams (e.g. paper, plastics etc.) are not intended as direct input material for SRF production but are rather intended for material recycling. Reject from these kinds of materials can be found above under bullet 4 Non-hazardous waste from material recycling facilities.

6. Non-hazardous waste not otherwise specified in the list

If the waste origin is not covered in the above categories, it shall be declared here. The origin of the waste should be described as clearly as possible.

It is not unusual that waste fractions that are intended for production of SRF (or for combustion) are mixed during the logistic chain, thus there could be waste from different origins in the same transport. However, the principle is to give as much detail about the origin as possible. Thus, if waste have been collected from different industries (and not being packaging waste) then the separate codes of origins shall be stated.

Table 3 — Sources of input material for the production of SRF

1. Non- hazardous industrial waste	1.1 wastes from agriculture, horticulture, aquaculture, forestry, hunting and fishing	1.1.1 plastic waste (except packaging)
		1.1.2 absorbed urine and manure (including spoiled straw), collected separately and treated off-site
		1.1.3 other non- hazardous waste
	1.2 wastes from pulp, paper and cardboard production and processing	1.2.1 mechanically separated rejects from pulping of waste-paper and cardboard
		1.2.2 fibre rejects, fibre-, filler- and coating-sludges from mechanical separation
		1.2.3 other non- hazardous waste
	1.3 waste from wood processing, production of panels and furniture	1.3.1 non-hazardous wood waste from chemically treated wood
		1.3.2 other non-hazardous waste
	1.4 wastes from the textile industry	1.4.1 waste from composite materials (impregnated textile, elastomer, plastomer)
		1.4.2 waste from unprocessed textile fibres
		1.4.3 waste from processed textile fibres
		1.4.4 other non- hazardous waste
	1.5 wastes from organic chemical processes	1.5.1 plastic waste (except packaging)
		1.5.2 solid wastes other than solid wastes containing hazardous substances
		1.5.3 other non- hazardous waste
	1.6 wastes from shaping and physical and mechanical surface treatment of plastics	1.6.1 other non- hazardous waste
	1.7 packaging waste	1.7.1 paper and cardboard packaging
		1.7.2 plastic packaging
		1.7.3 wooden packaging
1.7.4 composite packaging		
1.7.5 mixed packaging		
1.7.6 textile packaging		
2. Non- hazardous construction and demolition waste	2.1 wood and plastic	2.1.1 wood
		2.1.2 plastic (except packaging)
	2.2 bituminous mixtures, coal tar and tarred products	2.2.1 bituminous mixtures that are not considered as hazardous waste
	2.3 other construction and demolition wastes	2.3.1 insulation materials (polyurethane and polystyrene)
		2.3.2 mixed construction and demolition waste
3.1 wastes from aerobic treatment of solid wastes	3.1.1 non-composted fraction of municipal and similar wastes	
	3.1.2 non-composted fraction of animal and vegetable waste	
3.2 wastes from anaerobic treatment of solid waste	3.2.1 non-digestible fraction of municipal, industrial and other waste	
3.3 sludge from wastewater treatment plants	3.3.1 sludge from treatment of urban wastewater	
	3.3.2 other solid waste from treatment of urban wastewater	
	3.3.3 sludge from treatment of industrial wastewater	
	3.3.4 other non-hazardous solid waste from treatment of industrial wastewater	

Table 3 (continued)

3. Non-hazardous waste from waste management facilities	3.4 wastes from the mechanical treatment of waste (for example sorting, crushing, compacting, pelletising)	3.4.1 paper and cardboard
		3.4.2 plastic and rubber
		3.4.3 wood
		3.4.4 textiles
		3.4.5 other non-hazardous wastes (including mixtures of materials) from mechanical treatment of wastes
	3.5 end-of-life vehicles from different means of transport (including off-road machinery) and wastes from dismantling of end-of-life vehicles and vehicle maintenance	3.5.1 end of life tyres
3.5.2 plastic waste (except packaging)		
3.5.3 other non-hazardous waste from end-of-life vehicles		
4 Non-hazardous waste from material recycling facilities	4.1 reject fractions from material recycling facilities, not otherwise mentioned	4.1.1 paper and cardboard
		4.1.2 clothes
		4.1.3 textiles
		4.1.4 wood
		4.1.5 plastics
		4.1.6 other non-hazardous waste from material recycling facilities
5. Non-hazardous municipal solid waste or similar non-hazardous commercial waste	5.1 residual municipal solid waste	5.2.1 Wood waste
	5.2 bulky waste	5.2.2 Plastic waste (except packaging)
		5.2.3 Mixed combustible bulky waste
		5.3.1 waste from markets
	5.3 other municipal solid waste or similar commercial waste	5.3.2 park and garden waste
6 Non-hazardous waste not otherwise specified in the list	any non-hazardous waste that is not defined by the codes above, to be specified by the supplier	

NOTE 1 There can be national legislation demanding the use of national or regional waste catalogues/lists codes in the specification. In these cases, that information can also be stated in the specification table.

NOTE 2 Some waste streams of biomass origin can fulfil requirement for a solid biofuel and can be specified according to ISO 17225-1^[4].

NOTE 3 The list of origins has been developed from the base of the European waste catalogue but been heavily modified and simplified to accommodate the streams most commonly used as input material for SRF production.

7.3 Traded forms of solid recovered fuels

Solid recovered fuels are traded in many varied sizes and shapes. The size and shape influence the handling of the fuel as well as its combustion properties. Recovered fuels can be delivered in the forms shown in [Table 4](#). Other forms are also present on the market.