



SLOVENSKI STANDARD
kSIST FprEN ISO 22477-2:2023
01-junij-2023

Geotehnično preiskovanje in preskušanje - Preskušanje geotehničnih konstrukcij - 2. del: Preskušanje pilotov: statični natezni preskus (ISO/FDIS 22477-2:2023)

Geotechnical investigation and testing - Testing of geotechnical structures - Part 2: Testing of piles: static tension load testing (ISO/FDIS 22477-2:2023)

Geotechnische Erkundung und Untersuchung - Prüfung von geotechnischen Bauwerken und Bauwerksteilen - Teil 2: Statisch axiale Pfahlprobelastung auf Zug (ISO/FDIS 22477-2:2023)

Reconnaissance et essais géotechniques - Essais des structures géotechniques - Partie 2: Essai de pieux: essais de chargement statique en traction (ISO/FDIS 22477-2:2023)

Ta slovenski standard je istoveten z: FprEN ISO 22477-2

<https://standards.iteh.ai/catalog/standards/sist/e4cb6eda-7546-41ab-9037-0012f60b815f/sist-en-iso-22477-2-2023>

ICS:

93.020	Zemeljska dela. Izkopavanja.	Earthworks. Excavations.
	Gradnja temeljev. Dela pod zemljo	Foundation construction. Underground works

kSIST FprEN ISO 22477-2:2023

en,fr,de

FINAL
DRAFT

INTERNATIONAL
STANDARD

ISO/FDIS
22477-2

ISO/TC 182

Secretariat: BSI

Voting begins on:
2023-04-05

Voting terminates on:
2023-05-31

Geotechnical investigation and testing — Testing of geotechnical structures —

Part 2: Testing of piles: Static tension load testing

Reconnaissance et essais géotechniques — Essais des structures géotechniques —

Partie 2: Essai de pieux: essais de chargement statique en traction

iteh standards
(<https://standards.iteh.ai>)
Document Preview

[SIST EN ISO 22477-2:2023](https://standards.iteh.ai/catalog/standards/sist/e4cb6eda-7546-41ab-9037-0012f60b815f/sist-en-iso-22477-2-2023)

<https://standards.iteh.ai/catalog/standards/sist/e4cb6eda-7546-41ab-9037-0012f60b815f/sist-en-iso-22477-2-2023>

ISO/CEN PARALLEL PROCESSING

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.



Reference number
ISO/FDIS 22477-2:2023(E)

© ISO 2023

iTeh Standards (<https://standards.iteh.ai>) Document Preview

[SIST EN ISO 22477-2:2023](https://standards.iteh.ai/catalog/standards/sist/e4cb6eda-7546-41ab-9037-0012f60b815f/sist-en-iso-22477-2-2023)

<https://standards.iteh.ai/catalog/standards/sist/e4cb6eda-7546-41ab-9037-0012f60b815f/sist-en-iso-22477-2-2023>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms, definitions and symbols	1
3.1 Terms, definitions.....	2
3.2 Symbols.....	2
4 Equipment	3
4.1 General.....	3
4.2 Reaction device.....	3
4.3 Force Input.....	4
4.3.1 General.....	4
4.3.2 Specifications of force input.....	5
4.4 Measurement of pile head displacements.....	5
4.5 Measurement of pile load.....	6
4.6 Pile instrumentation.....	6
5 Test procedure	7
5.1 Test preparation.....	7
5.1.1 Protections.....	7
5.1.2 Construction of a test pile.....	7
5.1.3 Test date.....	8
5.2 Loading procedure.....	8
5.2.1 General.....	8
5.2.2 Load step sequence and duration of load steps for one cycle procedure.....	8
5.2.3 Load step sequence and duration of load steps for multiple cycle procedure.....	9
5.2.4 Maximum test load F_p	10
5.2.5 Measuring intervals.....	10
6 Test report	11
6.1 General.....	11
6.2 General information.....	11
6.3 Data report.....	12
6.4 Interpretative report.....	13
Annex A (informative) Critical creep load in tension	18
Bibliography	19

ISO/FDIS 22477-2:2023(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 182, *Geotechnics*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 341, *Geotechnical Investigation and Testing*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

A list of all parts in the ISO 22477 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Geotechnical investigation and testing — Testing of geotechnical structures —

Part 2: Testing of piles: Static tension load testing

1 Scope

This document establishes the specifications for the execution of static pile load tests in which a single pile is subjected to an axial static load in tension in order to define its load-displacement behaviour.

This document is applicable to vertical piles as well as raking piles.

All types of piles are covered by this document. The tests considered in this document are limited to maintained load tests. Cyclic load tests are not covered by this document.

NOTE ISO 22477-2 is intended to be used in conjunction with EN 1997-1. Numerical values of partial factors for limit states and of correlation factors to derive characteristic values from static pile load tests to be taken into account in design are provided in EN 1997-1.

This document provides specifications for the execution of static axial pile load tests:

- a) checking that a pile behaves as designed,
- b) measuring the resistance of a pile.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 7500-1, *Metallic materials — Calibration and verification of static uniaxial testing machines — Part 1: Tension/compression testing machines — Calibration and verification of the force-measuring system*

EN 1990, *Eurocode 0: Basis of structural design*

EN 1997-1, *Eurocode 7: Geotechnical design — Part 1: General rules*

EN 1997-2, *Eurocode 7: Geotechnical design — Part 2: Ground investigation and testing*

3 Terms, definitions and symbols

For the purposes of this document, the terms and definitions given in EN 1990, EN 1997-1, EN 1997-2 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

ISO/FDIS 22477-2:2023(E)

3.1 Terms, definitions

3.1.1

pile load

F_t
tension load applied to the head of the pile during the test

Note 1 to entry: For tests with embedded jack, the load is applied at another level (see ISO 22477-1).

3.1.2

load increment

ΔF
increment of load added or removed during the test

3.1.3

pile diameter

equivalent pile diameter

D
diameter of the pile

Note 1 to entry: For non-circular pile with cross section A , the equivalent pile diameter equals $\sqrt{\frac{4A}{\pi}}$.

3.1.4

working pile

pile for the foundation of a structure

3.1.5

test pile

pile to which loads are applied to determine the resistance-displacement characteristics of the pile and the surrounding ground

3.1.6

measured tensile resistance

$R_{t,m}$
value of the measured tensile resistance at the ultimate limit state, in one or several pile load tests

Note 1 to entry: The recommended failure criterion may be defined in EN 1997-1 or its national annex. <https://standards.iteh.ai/>

3.1.7

creep rate

α
ratio of the increase in pile head displacement to the decimal logarithm of time during a specified time interval

3.2 Symbols

A	pile cross section
D	pile diameter/equivalent pile diameter
F_t	load applied to the head of the pile during the test
$F_{t,cr}$	critical creep load in tension
$F'_{t,cr}$	intersection of the linear regression of the first and last part of the alpha versus load curve
$F_{t,k}$	characteristic axial tensile load
F_p	predefined maximum load applied during the test

N	axial force
q_s	unit shaft friction
$q_{s,m}$	measured value of q_s
$q_{s,mob}$	mobilised shaft friction
R_t	tensile resistance of the ground against a pile, at the ultimate limit state
$R_{t,m}$	measured value of R_t in one or several pile load tests
s	axial displacement of pile at any depth z
s_h	axial displacement of pile head
t	time
z	depth
α	creep rate

4 Equipment

4.1 General

The selection of the equipment shall take into account the aim of the test, the ground conditions and the expected displacement of the pile under the maximum test load.

4.2 Reaction device

The reaction device for pile tested in tension can be:

- shallow foundations;
- compression piles.

NOTE 1 The reaction device can be the test pile itself where the load is applied at depth by one or more hydraulic jacks which are cast into the pile for bi-directional pile loading (see ISO 22477-1).

The influence of the reaction system on the test pile shall be minimized.

The minimum clear distances between the test pile and the reaction system elements depend on the aim of the test (tensile resistance or stiffness).

For tests aiming at determining tensile resistance (ultimate limit state), minimum required distances are shown in [Figure 1 a\)](#) and b). The maximum value shall be applied.

NOTE 2 If the minimum clear distance between reaction system and test pile is smaller than $5 D$, the tensile resistance can be overestimated. The provided minimum distances limit the overestimation to approximately 5 %.

ISO/FDIS 22477-2:2023(E)

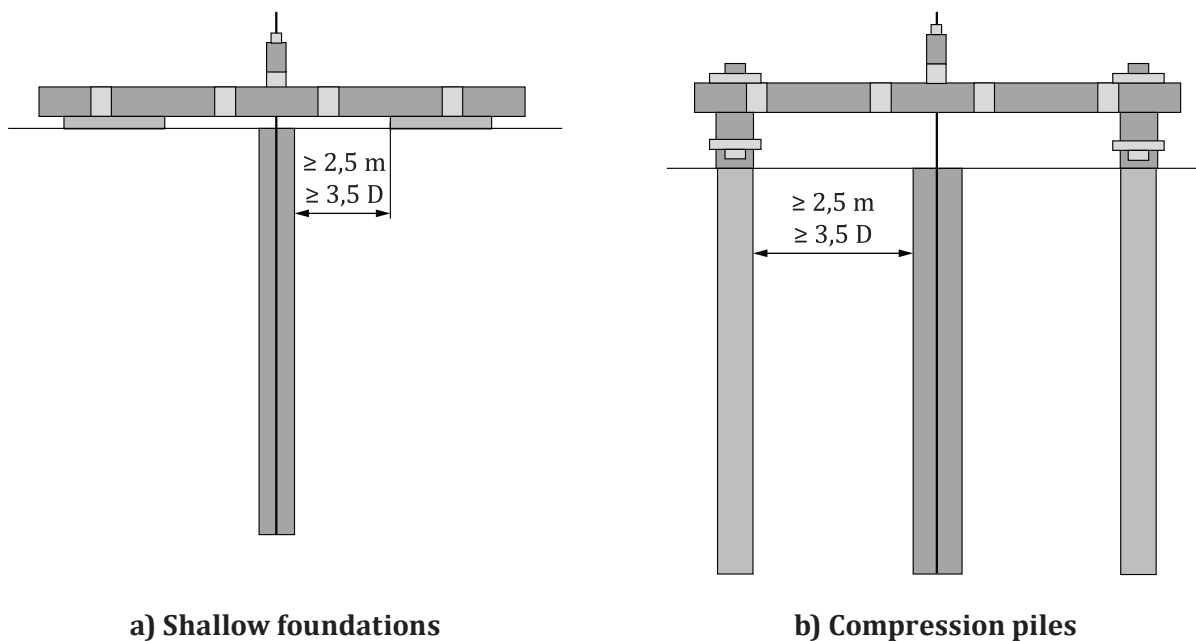


Figure 1 — Minimum clear distances between test pile and reaction system

For tests aiming at evaluating the axial displacement for the serviceability limit state design, the influence of reaction system is higher. In this case, a minimum $10 D$ clear distance should be implemented. This clear distance value may be reduced if a dedicated assessment is performed, taking into account the ground conditions. In any case, the clear distance shall not be lower than the values given in [Figure 1 a\)](#) and b).

NOTE 3 This assessment can include a modification of the reaction system to reduce its influence on the tested pile. For example, reduction of the skin friction of the reaction piles or the use of embedded jack(s) can be considered.

For static pile load tests on piles with a diameter smaller than 300 mm, these distances may be reduced. However, the minimum clear distance shall be 1,5 m.

The reaction system shall be designed to resist the maximum test load F_p in accordance with the relevant standards. The displacements of the reaction system shall be limited to ensure that the load is applied axially for the duration of the test.

Working piles may be used as reaction piles, provided that their structural resistance is sufficient and there is no detrimental effect on their ability to perform as part of the structure. The displacement of the working piles shall be monitored during the test.

Reaction systems should be arranged symmetrically around the test pile. In cases of non-symmetrical reaction systems, measures shall be taken to avoid detrimental rotation and/or translation of the reaction system.

4.3 Force Input

4.3.1 General

One or more hydraulic jacks should be used to apply the load on the test pile.

If several hydraulic jacks are used to apply the test load, they shall be arranged symmetrically, of the same model and be supplied by a common supply from one hydraulic unit. Each hydraulic jack shall be provided with a shut-off valve and an additional pressure gauge.

If a single jack is used, it shall be arranged centrally in order to ensure the pile is loaded axially.