
**Paints and varnishes — Determination
of resistance to liquids —**

**Part 5:
Temperature-gradient oven method**

*Peintures et vernis — Détermination de la résistance aux liquides —
Partie 5: Méthode au four à gradient de température*

*iTeh Standards
(<https://standards.iteh.ai>)
Document Preview*

ISO 2812-5:2018

<https://standards.iteh.ai/catalog/standards/iso/7240e049-c125-4bec-b77d-ac2e16ea2dcd/iso-2812-5-2018>



iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

ISO 2812-5:2018

<https://standards.iteh.ai/catalog/standards/iso/7240e049-c125-4bec-b77d-ac2e16ea2dcd/iso-2812-5-2018>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2018

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Principle	1
5 Limitations	2
6 Apparatus	2
7 Test substances	2
8 Sampling	2
9 Test panels	2
9.1 Substrate.....	2
9.2 Preparation and coating.....	3
9.3 Coating thickness.....	3
10 Procedure	3
10.1 Conditioning of the test panels.....	3
10.2 Test conditions.....	3
10.3 Determination.....	3
11 Evaluation	3
12 Precision	4
12.1 Repeatability limit (r).....	4
12.2 Reproducibility limit (R).....	4
13 Test report	4
Annex A (informative) Examples of test substances	5
Bibliography	7

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 35, *Paints and varnishes*, Subcommittee SC 9, *General test methods for paints and varnishes*.

This second edition cancels and replaces the first edition (ISO 2812-5:2007), which has been technically revised. The main changes compared to the previous edition are as follows:

- a) [Clause 3](#) and [Clause 5](#) have been added;
- b) in [6.1](#), the description of the gradient oven has been amended;
- c) in [10.3](#), the distance of the individual heating segments for a temperature increase of 1 °C has been clarified to 1 cm;
- d) in [Clause 11](#), reference to ISO 13076 has been made for the lighting and procedure for visual assessment;
- e) in [Annex A](#), the CAS numbers have been added to the reagents listed.

A list of all parts in the ISO 2812 series can be found on the ISO website.

Paints and varnishes — Determination of resistance to liquids —

Part 5: Temperature-gradient oven method

1 Scope

This document specifies a method, using a temperature-gradient oven, for determining the resistance of an individual-layer or multi-layer system of coating materials to the effects of liquids or paste-like products.

This method enables the testers to determine the effects of the test substance on the coating and, if necessary, to assess the damage to the substrate.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1513, *Paints and varnishes — Examination and preparation of test samples*

ISO 1514, *Paints and varnishes — Standard panels for testing*

ISO 2808, *Paints and varnishes — Determination of film thickness*

ISO 3270, *Paints and varnishes and their raw materials — Temperatures and humidities for conditioning and testing*

ISO 4618, *Paints and varnishes — Terms and definitions*

ISO 13076, *Paints and varnishes — Lighting and procedure for visual assessments of coatings*

ISO 15528, *Paints, varnishes and raw materials for paints and varnishes — Sampling*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 4618 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

4 Principle

A test substance (see [Annex A](#)) is applied to a coated test panel following a specified procedure. The test panel is placed in a gradient oven. The effects of the exposures are assessed in accordance with agreed criteria.


5 Limitations

Temperature and humidity are important parameters affecting test results. Deviations from the requirements specified can lead to results that are not comparable. However, the interested parties may agree upon alternative parameters and these parameters shall be reported.

6 Apparatus

Ordinary laboratory equipment and the following apparatus.

6.1 Gradient oven, suitable for generating a linear temperature gradient over the length of the test panel, by heating the substrate from the bottom. The device shall be designed such that it has maximum gradients over the width of the panel of 2,5 °C. The heat transfer from the heater(s) to the substrate shall be such that a homogenous transfer can be produced (see [Figure 1](#)).

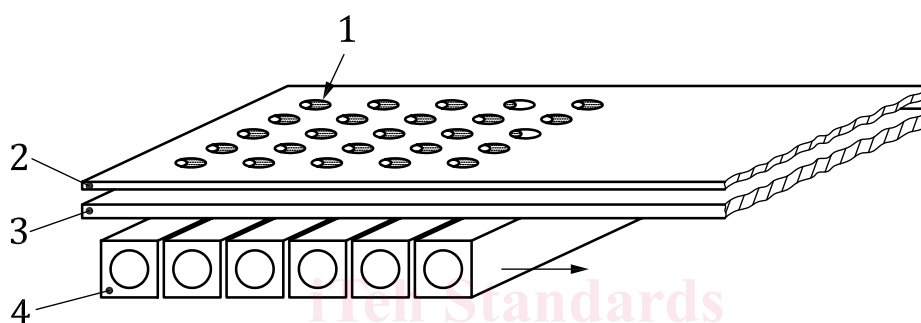

Key

- 1 test substance
- 2 test panel
- 3 special-purpose glass
- 4 heating elements

Full Standards
(<https://standards.iteh.ai>)
Document Preview

ISO 2812-5:2018

<https://standards.iteh.ai/catalog/standards/sen/7340e049-e125-4bba-b77d-ac2e16ea2dcd/iso-2812-5-2018>

Figure 1 — Gradient-oven heating bench

6.2 Metering pipette, suitable for applying droplets of test substance with a volume from 25 µl to 100 µl.

7 Test substances

One or more test substances, as agreed between interested parties, shall be used. Examples of test substances are given in [Annex A](#).

8 Sampling

Take a representative sample of the coating material to be tested, in accordance with ISO 15528.

Pretest each sample in accordance with ISO 1513 and prepare it for further testing (see [9.2](#)).

9 Test panels

9.1 Substrate

Unless otherwise agreed, use steel test panels with dimensions of approximately 560 mm × 100 mm and a thickness of 0,7 mm to 1,0 mm.