
Profili iz trdega polivinilklorida (PVC-U) za izdelavo oken in vrat - Razvrščanje, zahteve in preskusne metode - 1. del: Neprevlečeni PVC-U profili s svetlo površino

Unplasticized poly(vinyl chloride) (PVC-U) profiles for the fabrication of windows and doors - Classification, requirements and test methods - Part 1: Non-coated PVC-U profiles with light coloured surfaces

Profile aus weichmacherfreiem Polyvinylchlorid (PVC-U) zur Herstellung von Fenstern und Türen - Klassifizierung, Anforderungen und Prüfverfahren - Teil 1: Nicht beschichtete PVC-U Profile mit hellen Oberflächen

Profilés de poly(chlorure de vinyle) non plastifié (PVC-U) pour la fabrication des fenêtres et des portes - Classification, exigences et méthodes d'essai - Partie 1 : Profilés en PVC-U non revêtus avec des faces de teinte claire

Ta slovenski standard je istoveten z: EN 12608-1:2016+A1:2020

ICS:

83.140.99	Drugi izdelki iz gume in polimernih materialov	Other rubber and plastics products
91.060.50	Vrata in okna	Doors and windows

SIST EN 12608-1:2016+A1:2020 en,fr,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 12608-1:2016+A1:2020](https://standards.iteh.ai/catalog/standards/sist/372a61bc-0655-47a7-ac14-bf028ef7ebd4/sist-en-12608-1-2016a1-2020)

<https://standards.iteh.ai/catalog/standards/sist/372a61bc-0655-47a7-ac14-bf028ef7ebd4/sist-en-12608-1-2016a1-2020>

EUROPEAN STANDARD

EN 12608-1:2016+A1

NORME EUROPÉENNE

EUROPÄISCHE NORM

August 2020

ICS 83.140.99; 91.060.50

Supersedes EN 12608-1:2016

English Version

Unplasticized poly(vinyl chloride) (PVC-U) profiles for the fabrication of windows and doors - Classification, requirements and test methods - Part 1: Non-coated PVC-U profiles with light coloured surfaces

Profils de poly(chlorure de vinyle) non plastifié (PVC-U) pour la fabrication des fenêtres et des portes - Classification, exigences et méthodes d'essai - Partie 1 : Profils en PVC-U non revêtus avec des faces de teinte claire

Profile aus weichmacherfreiem Polyvinylchlorid (PVC-U) zur Herstellung von Fenstern und Türen - Klassifizierung, Anforderungen und Prüfverfahren - Teil 1: Nicht beschichtete PVC-U Profile mit hellen Oberflächen

This European Standard was approved by CEN on 15 January 2016 and includes Amendment 1 approved by CEN on 15 June 2020.

iTeh STANDARD PREVIEW

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

[SIST EN 12608-1:2016+A1:2020](#)

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

Contents	Page
1	Scope 6
2	Normative references 6
3	Terms and definitions 7
3.1	General 7
3.2	Profile definitions 7
3.3	Geometrical definitions 8
3.4	Material definitions 9
4	Classifications 10
4.1	General 10
4.2	Classification of climatic zones 10
4.3	Classification of main profiles according to the resistance to impact by falling mass 11
4.4	Classification of main profiles according to the wall thickness of the external walls 11
5	Requirements 13
5.1	Material 13
5.1.1	UV resistant virgin material 13
5.1.2	Non-UV resistant virgin material 13
5.1.3	Reprocessed, recycled materials and non-UV resistant virgin materials 13
5.2	Appearance 14
5.3	Dimensions and tolerances 14
5.3.1	General 14
5.3.2	Nominal shape 14
5.3.3	Wall thickness of main profiles 15
5.3.4	Tolerances on other dimensions 15
5.3.5	Deviation from straightness of the main profiles 15
5.4	Linear weight of the main profiles 15
5.5	Heat reversion 15
5.5.1	Main profile 15
5.5.2	Auxiliary profiles 15
5.6	Resistance to impact of main profiles by falling mass 15
5.7	Behaviour after heating at 150 °C 15
5.8	Charpy impact resistance of main profile 15
5.9	Resistance to weathering 16
5.9.1	Exposure procedure 16
5.9.2	Impact strength after artificial weathering of main profiles 16
5.9.3	Colour fastness 16
5.10	Strength of welded corners and T-joints of main profiles 17
5.10.1	Test method 17
5.10.2	Tensile bending test 17
5.10.3	Compression bending test 17
6	Test methods 17
6.1	Determination of the appearance 17
6.2	Determination of dimensions 17
6.2.1	Measuring devices 17
6.2.2	Test specimen 17

6.2.3	Conditioning	17
6.2.4	Procedure	18
6.3	Determination of the linear weight of the profile.....	18
6.3.1	Apparatus	18
6.3.2	Test specimen	18
6.3.3	Conditioning	18
6.3.4	Procedure	18
6.4	Determination of the thickness of a coextruded layer.....	18
6.5	Determination of colorimetric co-ordinates	18
6.6	Permissible tolerances on standard colours	19
7	A1 Traceability A1	19
7.1	A1 Main profiles	19
7.2	Auxiliary profiles	19
Annex A (normative) Material characteristics, preparation of samples and requirements.....		21
A.1	General	21
A.2	Test specimens	21
A.3	Preparation of pressed plates.....	21
A.4	Material characteristics	21
A.4.1	Vicat softening temperature.....	21
A.4.2	Flexural modulus of elasticity.....	22
A.4.3	Tensile impact strength.....	22
A.5	Test report	22
Annex B (normative) Calculation method for the determination of the radiant exposure and exposure time to be used for artificial weathering.....		23
B.1	General	23
B.2	Calculation.....	23
Annex C (informative) A1 Cross-sections of typical profiles.....		26

EN 12608-1:2016+A1:2020 (E)

European foreword

This document (EN 12608-1:2016+A1:2020) has been prepared by Technical Committee CEN/TC 249 "Plastics", the secretariat of which is held by NBN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by February 2021, and conflicting national standards shall be withdrawn at the latest by February 2021.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

This document supersedes $\boxed{A_1}$ EN 12608:2016 $\boxed{A_1}$.

This document includes Amendment 1 approved by CEN on 15 June 2020.

The start and finish of text introduced or altered by amendment is indicated in the text by tags $\boxed{A_1}$ $\boxed{A_1}$.

$\boxed{A_1}$ The major modifications between the previous edition EN 12608:2003 and the new edition EN 12608:2016 are: $\boxed{A_1}$

- Change in structure of definitions (general, profile, geometrical and material);
- Review of definitions of own reprocessed (previously reprocessible) material $\boxed{A_1}$ (3.4.7) $\boxed{A_1}$ and external reprocessed (previously reprocessible) material $\boxed{A_1}$ (3.4.8) $\boxed{A_1}$;
- Including a new material (non-UV resistant virgin material); 2020
<https://standards.iteh.ai/catalog/standards/sist/372a61bc-0655-47a7-ac14-000000000000/en-12608-1:2016-a1-2020>
- Review of Table 1, which defines the classification of climatic zones in Europe; (correction of a mistake in EN 12608:2003);
- Addition of a class (no performance determined) for the classification of main profiles according to the resistance to impact by falling mass (Table 2);
- Complete review of 5.1, giving the requirements for materials, establishing the distinction between UV resistant virgin material (5.1.1), non UV-resistant virgin material (5.1.2) and reprocessed (previously reprocessible), recycled (previously recyclable) materials and non-UV resistant virgin materials (5.1.3) with the addition of Table 4 which defines the uses allowed according to the type of material);
- Review of the test of Charpy impact resistance of main profiles (5.8); Introduction of dependence on classes of wall thickness;
- Review of the methods to determine the colorimetric co-ordinates (6.5);
- Addition of new subclause 6.4 for the determination of the thickness of a co-extruded layer;
- Addition of a requirement for individual values for the Vicat softening temperature (A.4.1);
- Addition of a requirement for individual values for the flexural modulus of elasticity (A.4.2);
- Addition of a requirement for individual values for the tensile impact strength (A.4.3);

- Deletion of the Charpy impact resistance from Annex A (material characteristics);
- Editorial review of the whole document and updating of normative references.

EN 12608, *Unplasticized poly(vinyl chloride) (PVC-U) profiles for the fabrication of windows and doors - Classification, requirements and test methods* consists of the following parts:

- *Part 1: Non-coated PVC-U profiles with light coloured surfaces*
- *Parts 2: PVC-U profiles with laminated foils* (in preparation)
- *Parts 3: PVC-U profiles with coextruded coloured top-layer* (in preparation)
- *Parts 4: PVC-U profiles with lacquered-coating* (in preparation)

According to the CEN-CENELEC Internal Regulations, the national standards organisations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 12608-1:2016+A1:2020](https://standards.iteh.ai/catalog/standards/sist/372a61bc-0655-47a7-ac14-bf028ef7ebd4/sist-en-12608-1-2016a1-2020)

<https://standards.iteh.ai/catalog/standards/sist/372a61bc-0655-47a7-ac14-bf028ef7ebd4/sist-en-12608-1-2016a1-2020>

EN 12608-1:2016+A1:2020 (E)

1 Scope

This European Standard specifies the classifications, requirements and test methods for non-coated unplasticized poly(vinyl chloride) (PVC-U) profiles with light coloured surfaces intended to be used for the fabrication of windows and doors.

It is applicable to PVC-U profiles with the colorimetric co-ordinates measured on the visible surfaces, as follows:

- $L^* \geq 82$ (chromaticity co-ordinate $Y \geq 60$),
- $-2,5 \leq a^* \leq 5$,
- $-5 \leq b^* \leq 15$.

NOTE 1 For editorial reasons in this document the term "window" is used for window/door.

NOTE 2 Profiles made from PVC-U materials with reinforcements (e.g. glass fibres) are not part of this scope.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

[A1] EN 477, *Plastics — Poly(vinyl chloride) (PVC) based profiles — Determination of the resistance to impact of profiles by falling mass*

EN 478, *Plastics — Poly(vinyl chloride) (PVC) based profiles — Determination of the appearance after exposure at 150 °C*

EN 479, *Plastics — Poly(vinyl chloride) (PVC) based profiles — Determination of heat reversion*

EN 513, *Plastics — Poly(vinyl chloride) (PVC) based profiles — Determination of the resistance to artificial weathering*

EN 514, *Plastics — Poly(vinyl chloride) (PVC) based profiles — Determination of the strength of welded corners and T-joints* **[A1]**

EN ISO 105-A01:2010, *Textiles - Tests for colour fastness - Part A01: General principles of testing (ISO 105-A01:2010)*

EN ISO 178, *Plastics - Determination of flexural properties (ISO 178)*

EN ISO 179-1, *Plastics - Determination of Charpy impact properties - Part 1: Non-instrumented impact test (ISO 179-1)*

EN ISO 306, *Plastics - Thermoplastic materials - Determination of Vicat softening temperature (VST) (ISO 306)*

[A1] EN ISO 21306-2:2019, *Plastics — Unplasticized poly(vinyl chloride) (PVC-U) moulding and extrusion materials — Part 2: Preparation of test specimens and determination of properties (ISO 21306-2:2019)* **[A1]**

EN ISO 8256, *Plastics - Determination of tensile-impact strength (ISO 8256)*

EN ISO 11664-1, *Colorimetry - Part 1: CIE standard colorimetric observers (ISO 11664-1)*

EN ISO 11664-2, *Colorimetry - Part 2: CIE standard illuminants (ISO 11664-2)*

EN ISO 11664-4, *Colorimetry - Part 4: CIE 1976 L*a*b* Colour space (ISO 11664-4)*

EN 20105-A02, *Textiles - Tests for colour fastness - Part A02: Grey scale for assessing change in colour (ISO 105-A02)*

ISO 18314-1, *Analytical colorimetry — Part 1: Practical colour measurement*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1 General

3.1.1

durability

ability of a profile to maintain satisfactory properties in a window over an estimated working life which is at least the economically reasonable working life of the window installed in a building (works)

Note 1 to entry: The indications given on the working life of a product cannot be interpreted as a guarantee given by the producer, but are regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3.2 Profile definitions

3.2.1

profile

product produced by extrusion

3.2.2

non-coated profile

profile without any surface treatment and without non-PVC-U coextruded layer(s)

EXAMPLE Profiles without laminated foils or painted surfaces.

3.2.3

main profile

profile, which defines the structure of the window

3.2.4

auxiliary profile

profile intended to be used for the fabrication of a window which is not a main profile

Note 1 to entry: Main and auxiliary profiles can be different according to the window construction techniques in the individual countries.

3.2.5

external wall (of a main profile)

wall of a main profile corresponding to its sight and non-sight surfaces

EN 12608-1:2016+A1:2020 (E)

3.2.6

sight surface

surface of a profile exposed to view when the installed window is closed

A1

Note 1 to entry: See Figure C.1 in Annex C. A1

A1 *deleted text* A1

3.2.7

visible surface

any surface or parts of surface of a profile which can be exposed to UV radiation after installation of the window, open or closed

3.2.8

coextruded profile

profile produced by using more than one extruder with different PVC-U materials according to 3.4 in one production process without mixing them

3.3 Geometrical definitions

3.3.1

nominal profile shape

shape and dimensions of a profile, as specified by the manufacturer

iTeh STANDARD PREVIEW
(standards.iteh.ai)

3.3.2

deviation from straightness

deviation of the longitudinal axis of a profile from the straight line

SIST EN 12608-1:2016+A1:2020
51bc-0655-47a7-ac14-
bf028ef7ebd4/sist-en-12608-1-2016a1-2020

3.3.3

depth (of a profile)

d

dimension, measured at right angles to the glazing plane, between the front and back face surfaces of a profile

A1

Note 1 to entry: See “d” in Figure 1. A1

3.3.4

overall width (of a profile)

w

largest dimension, measured in the direction of the glazing plane, perpendicular to the longitudinal axis of a profile

A1

Note 1 to entry: See “w” in Figure 1. A1

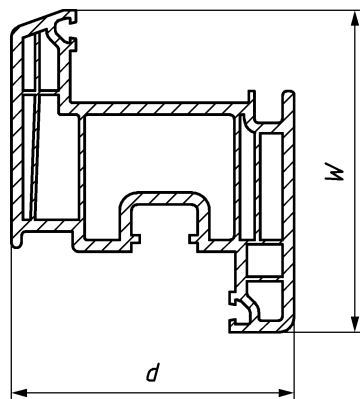
**Key** d depth of a profile w overall width of a profile

Figure 1 — Cross-section of a typical profile

3.4 Material definitions**3.4.1****material**

PVC-U compound in a form of granules or powder for the production of PVC-U profiles intended to be used for the fabrication of a window

3.4.2**defined formulation**

formulation which is a specified composition of polymer, additives and pigments

3.4.3**virgin material**

material of a defined formulation, which has not been used or processed other than required for its manufacture and to which no reprocessed or recycled material has been added

3.4.4**non-UV resistant virgin material****NUVM**

material according to 3.4.3 but not necessarily satisfying the requirements of the resistance to weathering

Note 1 to entry: See 5.9.

3.4.5**UV resistant virgin material****UVM**

virgin material which fulfils weathering resistance

3.4.6**reduced UV resistant virgin material****RUM**

virgin material which fulfils reduced weathering resistance