
**Information technology — Extensible
biometric data interchange formats —
Part 4:
Finger image data**

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

[ISO/IEC 39794-4:2019](https://standards.iteh.ai/catalog/standards/sist/8f9acfa-92a8-4d00-a249-dbea95cc1984/iso-iec-39794-4-2019)

<https://standards.iteh.ai/catalog/standards/sist/8f9acfa-92a8-4d00-a249-dbea95cc1984/iso-iec-39794-4-2019>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/IEC 39794-4:2019](https://standards.iteh.ai/catalog/standards/sist/8f9acfca-92a8-4d00-a249-dbea95cc1984/iso-iec-39794-4-2019)
<https://standards.iteh.ai/catalog/standards/sist/8f9acfca-92a8-4d00-a249-dbea95cc1984/iso-iec-39794-4-2019>



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

| | Page |
|--|-----------|
| Foreword | v |
| Introduction | vi |
| 1 Scope | 1 |
| 2 Normative references | 1 |
| 3 Terms and definitions | 1 |
| 4 Abbreviated terms | 5 |
| 5 Conformance | 6 |
| 6 Modality specific information | 6 |
| 6.1 Capture recommendations | 6 |
| 6.1.1 Fingerprint image | 6 |
| 6.1.2 Palm image | 6 |
| 6.2 Image coordinate system considerations | 7 |
| 6.3 Image representation requirements | 7 |
| 6.3.1 General | 7 |
| 6.3.2 Colourspace | 7 |
| 6.3.3 Pixel aspect ratio | 7 |
| 6.3.4 Bit-depth | 8 |
| 6.3.5 Image spatial sampling rate | 8 |
| 7 Abstract data elements | 8 |
| 7.1 Purpose and overall structure | 8 |
| 7.2 Finger image data block | 9 |
| 7.3 Version block | 9 |
| 7.4 Representation blocks | 10 |
| 7.5 Position | 10 |
| 7.6 Impression | 10 |
| 7.7 Image data format | 11 |
| 7.7.1 Supported data format | 11 |
| 7.7.2 PGM encoding definition | 11 |
| 7.8 Image data | 12 |
| 7.9 Capture date/time block | 12 |
| 7.10 Capture device block | 12 |
| 7.10.1 Model identifier block | 12 |
| 7.10.2 Capture device technology identifier | 12 |
| 7.10.3 Certification identifier blocks | 13 |
| 7.11 Quality blocks | 14 |
| 7.12 Spatial sampling rate block | 14 |
| 7.13 Position computed by capture device | 14 |
| 7.14 Original rotation | 14 |
| 7.15 Image rotated to vertical | 14 |
| 7.16 Image has been lossily compressed | 14 |
| 7.17 Segmentation blocks | 15 |
| 7.18 Annotation blocks | 15 |
| 7.19 PAD data block | 15 |
| 7.20 Comment blocks | 16 |
| 7.21 Vendor specific data blocks | 16 |
| 8 Encoding | 16 |
| 8.1 Tagged binary encoding | 16 |
| 8.2 XML encoding | 16 |
| 9 Registered BDB format identifiers | 16 |
| Annex A (normative) Formal specifications | 17 |

| | |
|--|-----------|
| Annex B (informative) Encoding examples | 29 |
| Annex C (normative) Conformance testing methodology | 33 |
| Annex D (normative) Capture device certifications | 38 |
| Annex E (informative) Conditions for capturing fingerprint image data | 62 |
| Annex F (normative) WSQ greyscale finger image compression specification | 71 |
| Bibliography | 97 |

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/IEC 39794-4:2019](https://standards.iteh.ai/catalog/standards/sist/8f9acfa-92a8-4d00-a249-dbea95cc1984/iso-iec-39794-4-2019)

<https://standards.iteh.ai/catalog/standards/sist/8f9acfa-92a8-4d00-a249-dbea95cc1984/iso-iec-39794-4-2019>

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents) or the IEC list of patent declarations received (see <http://patents.iec.ch>).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 37, *Biometrics*.

A list of all parts in the ISO/IEC 39794 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

The purchase of this ISO/IEC document carries a copyright licence for the purchaser to use ISO/IEC copyright in the schemas in the annexes to this document for the purpose of developing, implementing, installing and using software based on those schemas, subject to ISO/IEC licensing conditions set out in the schemas.

Introduction

Biometric data interchange formats enable the interoperability of different biometric systems. The first generation of biometric data interchange formats has been published between 2005 and 2007 in the first edition of the ISO/IEC 19794 series. From 2011 onwards, the second generation of biometric data interchange formats was published in the second edition of the established parts and the first edition of some new parts of the ISO/IEC 19794 series. In the second generation of biometric data interchange formats, new useful data elements such as data elements related to biometric sample quality have been added, the header data structures were harmonized across all parts of the ISO/IEC 19794 series, and XML encoding has been added in addition to the binary encoding.

In anticipation of the future need for additional data elements and to avoid future compatibility issues, ISO/IEC JTC 1/SC 37 has developed the ISO/IEC 39794 series as a third generation of biometric data interchange formats, defining extensible biometric data interchange formats capable of including future extensions in a defined way. Extensible specifications in ASN.1 (Abstract Syntax Notation One) and the distinguished encoding rules of ASN.1 form the basis for encoding biometric data in binary tag-length-value formats. XML schema definitions form the basis for encoding biometric data in XML (eXtensible Markup Language).

This third generation of finger image data interchange formats complements ISO/IEC 19794-4 (both the 2005 and 2011 editions). The first generation of biometric data interchange formats, which has been adopted, e.g. by ICAO for the biometric data stored in machine readable travel documents, is expected to be retained in the standards catalogue as long as needed.

This document is intended for those applications requiring the exchange of raw or processed fingerprint and other friction ridge images (for example, palm images) that may not necessarily be limited in the amount of resources available for data storage or transmitting time. It can be used for the exchange of scanned fingerprints containing detailed image pixel information.

Use of the captured or processed image allows interoperability among biometric systems relying on minutiae-based, pattern-based or other algorithms. Thus, data from the captured finger image offers the developer more freedom in choosing or combining comparison algorithms. For example, an enrolment image may be stored on a contactless chip located on an identification document. This will allow future verification of the holder of the document with systems that rely on either minutiae-based or pattern-based algorithms. Establishment of an image-based representation of fingerprint information will not rely on pre-established definitions of minutiae, patterns or other types. It will provide implementers with the flexibility to accommodate images captured from dissimilar devices, varying image sizes, spatial sampling rates and different greyscale depths. Use of the finger image will allow each vendor to implement their own algorithms to determine whether two fingerprint records are from the same finger.

This document supports both binary and XML encoding, to support a spectrum of user requirements. With XML, this document meets the requirements of modern IT architectures. With binary encoding this document is also able to be used in bandwidth or storage constrained environments.

Information technology — Extensible biometric data interchange formats —

Part 4: Finger image data

1 Scope

This document specifies:

- generic extensible data interchange formats for the representation of friction ridge image data: a tagged binary data format based on an extensible specification in ASN.1 and a textual data format based on an XML schema definition that are both capable of holding the same information;
- examples of data record contents;
- application specific requirements, recommendations, and best practices in data acquisition; and
- conformance test assertions and conformance test procedures applicable to this document.

iTeh STANDARD PREVIEW

2 Normative references (standards.iteh.ai)

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 2382-37, *Information technology — Vocabulary — Part 37: Biometrics*

ISO/IEC 8824-1, *Information technology — Abstract Syntax Notation One (ASN.1): Specification of basic notation — Part 1*

ISO/IEC 8825-1, *Information technology — ASN.1 encoding rules — Part 1: Specification of Basic Encoding Rules (BER), Canonical Encoding Rules (CER), and Distinguished Encoding Rules (DER)*

ISO/IEC 14495-1, *Information technology — Lossless and near-lossless compression of continuous-tone still images: Baseline*

ISO/IEC 15444 (all parts), *Information technology — JPEG 2000 image coding system*

ISO/IEC 15948, *Information technology — Computer graphics and image processing — Portable Network Graphics (PNG): Functional specification*

ISO/IEC 39794-1, *Information technology — Extensible biometric data interchange formats — Part 1: Framework*

W3C Recommendation, *XML Schema Part 1: Structures* (Second Edition), 28 October 2004

W3C Recommendation, *XML Schema Part 2: Datatypes* (Second Edition), 28 October 2004

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 2382-37, ISO/IEC 39794-1 and the following apply.

ISO and IEC maintain terminological databases for use in standardisation at the following addresses:

- IEC Electropedia available at <http://www.electropedia.org/>
- ISO Online Browsing Platform available at <http://www.iso.org/obp>.

- 3.1**
spatial sampling rate
number of pixels per unit distance used by a sensor or scanning device to initially capture an image
- 3.2**
coding model
procedure used to convert input data into symbols to be coded
- 3.3**
coding process
general term for referring to an encoding process, a decoding process, or both
- 3.4**
column
samples per line in an image
- 3.5**
compressed data
either compressed image data or table specification data or both
- 3.6**
compressed image data
coded representation of an image
- Note 1 to entry: As specified in [Annex F](#).
- 3.7**
compression
reduction in the number of bits used to represent source image data
- 3.8**
decoder
embodiment of a decoding process
- 3.9**
decoding process
process which takes as its input compressed image data and outputs a continuous-tone image
- 3.10**
dequantization
inverse procedure to quantization by which the decoder recovers a representation of the DWT coefficients
- 3.11**
reconstructed image
<data>continuous-tone image which is the output of the decoder
- Note 1 to entry: As defined in [Annex F](#).
- 3.12**
source image
<data>continuous-tone image used as input to any encoder

Note 1 to entry: As defined in [Annex F](#).

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/IEC 39794-4:2019](#)

<https://standards.iteh.ai/catalog/standards/sist/8f9acfca-92a8-4d00-a249-dbea95cc1984/iso-iec-39794-4-2019>

3.13**digital image**

<data>two-dimensional array of data

3.14**downsampling**

procedure by which the spatial resolution of an image is reduced

3.15**DWT****discrete wavelet transform**

linear transformation, implemented by a multirate filter bank, that maps a digital input signal to a collection of output subbands

3.16**encoder**

embodiment of an encoding process

3.17**encoding process**

process which takes as its input a continuous-tone image and outputs compressed image data

3.18**entropy-coded data segment**

independently decodable sequence of entropy encoded bytes of compressed image data

3.19**entropy decoder**

embodiment of an entropy decoding procedure

3.20**entropy decoding**

lossless procedure which recovers the sequence of symbols from the sequence of bits produced by the entropy coder

3.21**entropy encoder**

embodiment of an entropy encoding procedure

3.22**entropy encoding**

lossless procedure which converts a sequence of input symbols into a sequence of bits such that the average number of bits per symbol approaches the entropy of the input symbols

3.23**fingerprint image**

representation of an area of friction skin on the fleshy surface of a finger located horizontally between the two edges of the fingernail and vertically between the first joint and the tip of a finger

Note 1 to entry: It contains a unique pattern of friction ridge and valley information commonly referred to as a "fingerprint".

3.24**Huffman decoder**

embodiment of a Huffman decoding procedure

3.25**Huffman decoding**

entropy decoding procedure which recovers the symbol from each variable length code produced by the Huffman encoder

3.26

Huffman encoder

embodiment of a Huffman encoding procedure

3.27

Huffman encoding

entropy encoding procedure which assigns a variable length code to each input symbol

3.28

Huffman table

set of variable length codes required in a Huffman encoder and Huffman decoder

3.29

image data

either source image data or reconstructed image data

3.30

image spatial sampling rate

number of pixels per unit distance in the image

Note 1 to entry: This may be the result of processing a captured image. The original captured scanned image may have been subsampled, scaled, downsampled, or otherwise processed.

3.31

interchange format

representation of compressed image data for exchange between application environments

3.32

lossless

descriptive term for encoding and decoding processes and procedures in which the output of the decoding procedure(s) is identical to the input to the encoding procedure(s)

<https://standards.iteh.ai/catalog/standards/sist/8f9acfa-92a8-4d00-a249-dbea95cc1984/iso-iec-39794-4-2019>

3.33

marker

two-byte code in which the first byte is FF_{Hex} and the second byte is a value between 1 and FE_{Hex}

3.34

marker segment

marker and associated set of parameters

3.35

palm

friction ridge skin on the side and underside of the hand

3.36

parameter

fixed length integers 8, 16, or 32 bits in length, used in the compressed data format

3.37

plain fingerprint image

image captured from a finger placed on a platen without any rolling movement

3.38

procedure

set of steps which accomplishes one of the tasks which comprise an encoding or decoding process

3.39

progressive

<coding>separation of data segments into blocks that can be transmitted successively to allow the compressed image data to be decoded at successively higher levels of resolution

3.40**quantization table**

set of quantization values (i.e., bin widths) used to quantize DWT coefficients within the subbands

3.41**quantize**

act of performing the quantization procedure for a DWT coefficient

3.42**restart interval**

number of coefficients processed as an independent sequence within an image

3.43**restart marker**

marker that separates two restart intervals in an image

3.44**rolled fingerprint image**

image captured that is located between the two edges of the fingernail

Note 1 to entry: This type of image is typically acquired using a rolling motion from one edge of the fingernail to the other.

3.45**run length**

number of consecutive symbols of the same value

3.46**SWT****symmetric wavelet transform**

linear transform implemented by applying a DWT to a periodic symmetric extension of the input signal

3.47**sample**

one element in the two-dimensional array which comprises a finger image

3.48**table specification data**

coded representation from which the tables, used in the encoder and decoder, are generated

3.49**upsampling**

procedure by which the spatial resolution of an image is increased

4 Abbreviated terms

For the purposes of this document, the abbreviated terms given in ISO/IEC 39794-1 and the following apply.

| | |
|------|----------------------------------|
| ppcm | pixels per centimetre |
| ppi | pixels per inch |
| CTF | contrast transfer function |
| JPEG | joint photographic experts group |
| MTF | modulation transfer function |
| PGM | portable gray map |

| | |
|-----|-----------------------------|
| PNG | portable network graphics |
| TIR | total internal reflection |
| WSQ | wavelet scalar quantization |

5 Conformance

A biometric data block (BDB) conforms to this document if it satisfies all of the requirements related to:

- its data structure, data values and the relationships between its data elements as specified throughout [Clauses 6, 7, 8](#), and [Annex A](#), and
- the relationship between its data values and the input biometric data from which the biometric data record was generated as specified throughout [Clauses 6, 7, 8](#), and [Annex A](#).

A system that produces biometric data records conforms to this document if all biometric data records that it outputs conform to this document (as defined above) as claimed in the implementation conformance statement (ICS) associated with that system. A system does not need to be capable of producing biometric data records that cover all possible aspects of this document, but only those that are claimed to be supported by the system in the ICS.

A system that uses biometric data records conforms to this document if it can read, and use for the purpose intended by that system, all biometric data records that conform to this document (as defined above) as claimed in the ICS associated with that system. A system does not need to be capable of using biometric data records that cover all possible aspects of this document, but only those that are claimed to be supported by the system in an ICS. (standards.iteh.ai)

6 Modality specific information ISO/IEC 39794-4:2019

<https://standards.iteh.ai/catalog/standards/sist/8f9acfa-92a8-4d00-a249-dbea95cc1984/iso-iec-39794-4-2019>

6.1 Capture recommendations

6.1.1 Fingerprint image

This document is designed to accommodate both plain (flat) or rolled fingerprint images. Biometric systems perform better if the volar pad of the finger is centred both horizontally and vertically in the image capture area. Therefore, when capturing a fingerprint image, the centre of the fingerprint image should be located in the approximate centre of the image capture area.

For multiple finger verification and/or identification purposes, there exist fingerprint capture devices that will acquire images of multiple fingers during a single capture cycle. These devices are capable of capturing the plain impressions from two, three or four adjacent fingers of either hand during a single scanning. The plain impressions from the two thumbs or two index fingers can also be captured at one time. Therefore, with three placements of the fingers on a device's scanning surface all ten fingers from an individual would be acquired in three scans – right four fingers, left four fingers, and two thumbs. For these multi-finger captures, half of the captured fingers should be located to the left of the image centre and the other half of the fingers to the right of the image centre.

6.1.2 Palm image

This document is also designed to accommodate images from the palm of the hand or from the side of the hand opposite the thumb also known as the “writer’s palm”. Most comparison subsystems perform better if the flat or fleshy part of the palm or writer’s palm is centred both horizontally and vertically in the image capture area. Therefore, when capturing a palmprint image, the centre of the palm or writer’s palm image area should be located in the approximate centre of the image capture area. The palm itself may be captured as one entity, or various pieces of it can be captured as single images such as the

thenar (fleshy part behind the thumb), hypothenar (fleshy area opposite the thumb), or interdigital (area of the palm directly beneath the four fingers).

6.2 Image coordinate system considerations

The recorded image data shall appear to be the result of a scanning of an impression of a friction ridge image. For the purpose of describing the position of each pixel within an image to be exchanged, a pair of reference axes shall be used. The origin of the axes, pixel location (0,0), shall be located at the upper left-hand corner of each image. The x-coordinate (horizontal) position shall increase positively from the origin to the right side of the image. The y-coordinate (vertical) position shall increase positively from the origin to the bottom of the image.

To assure that friction ridge images are interoperable with existing fingerprint images in legacy datasets, care shall be taken to assure that the orientation of the fingerprint is correct. [Figure 1](#) shows how this shall be achieved.

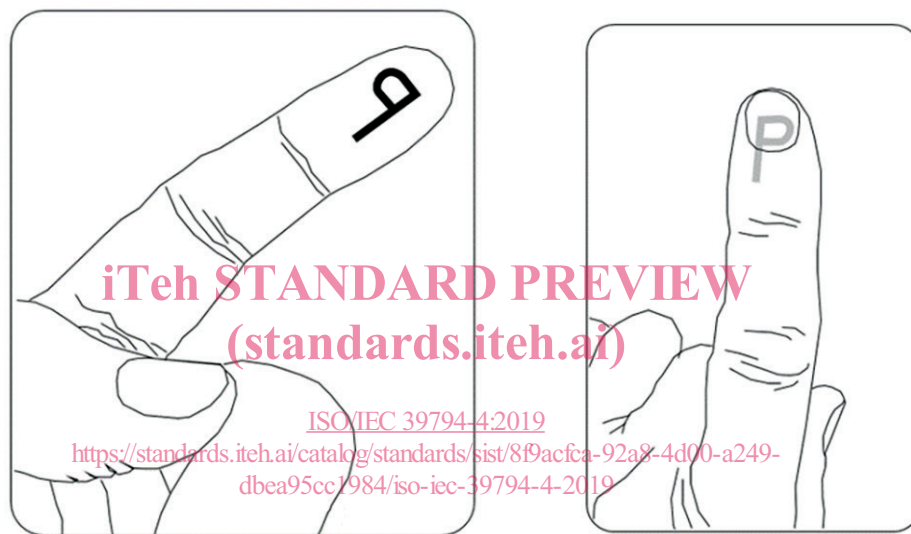


Figure 1 — Illustration of fingerprint orientation

6.3 Image representation requirements

6.3.1 General

Image representation requirements are dependent on various factors including the application, the available amount of raw pixel information to retain or exchange, and targeted performance metrics. Because of these factors, the images represented will have characteristics based on the aspects described in [6.3.2](#) through [6.3.5](#).

6.3.2 Colorspace

Finger images shall be represented as greyscale image data.

6.3.3 Pixel aspect ratio

The finger image shall be represented using square pixels, in which the horizontal and vertical dimensions of the pixels are equal. Any difference between these two dimensions should be within 1 %, i.e. the ratio of horizontal to vertical pixel dimensions should be between 0,99 and 1,01.

6.3.4 Bit-depth

The greyscale precision of the pixel data shall be specified in terms of the bit-depth or the number of bits used to represent the greyscale value of a pixel. A bit-depth of 8 provides 256 levels of grey. For greyscale data, the minimum value that can be assigned to a "black" pixel shall be zero. The maximum value that can be assigned to a "white" pixel shall be the greyscale value with all of its bits of precision set to "1". However, the "blackest" pixel in an image may have a value greater than "0" and the "whitest" pixel may have a value less than its maximum value.

6.3.5 Image spatial sampling rate

The spatial sampling rate of the image data formatted and recorded for interchange establishes the number of pixels for a given distance over the fingerprint object. A finger image may be represented with a certain number of pixels per cm (ppcm) or pixels per inch (ppi). A finger image with a sampling rate of 197 ppcm is practically equivalent to a finger image with a sampling rate of 500 ppi. For example, if a spatial sampling rate of 500 ppi is established for a fingerprint sensor with a width of 0.635 cm (corresponding to a quarter inch), there will be 125 pixels across the width of the image.

7 Abstract data elements

7.1 Purpose and overall structure

This clause describes the contents of data elements defined in this document. The description is independent of the encoding of the data elements.

The full naming conventions for ASN.1 module components and component types definitions, naming conventions for XML schema elements and element types definitions also ASN.1 and XML schema definition extensions applied per the ISO/IEC 39794 series are specified in ISO/IEC 39794-1.

The tagged binary encoding as well as the XML encoding is given in [Clause 8](#) and [Annex A](#).

The structure of the abstract data elements is described in [Figure 2](#).

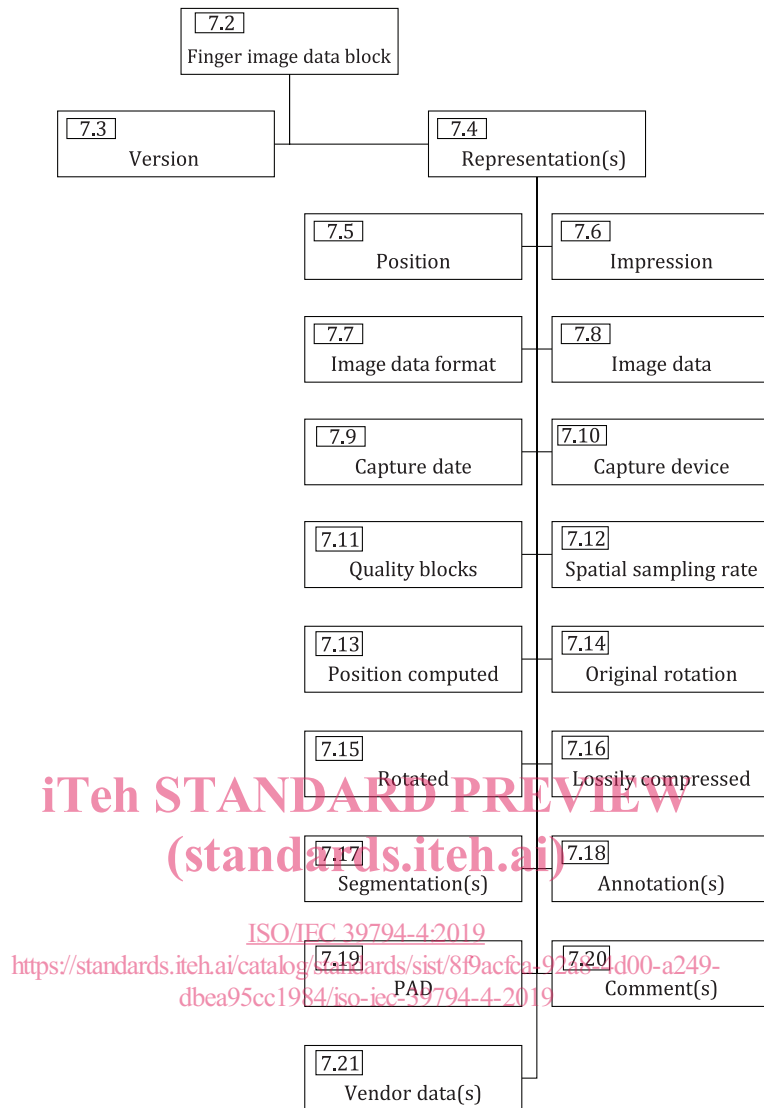


Figure 2 — Fingerprint image data block

NOTE Figure 2 is not automatically generated and can only be viewed as an overview of the structure.

7.2 Finger image data block

Abstract values: See [Figure 2](#) – Fingerprint image data block.

Contents: This data element is the container for all the data associated with the finger image.

7.3 Version block

Abstract values: See ISO/IEC 39794-1.

Contents: The generation number of this document shall be 3. The year shall be the year of the publication of this document.