



SLOVENSKI STANDARD

oSIST prEN ISO 9161:2020

01-november-2020

Uranov dioksid v prahu - Ugotavljanje navidezne gostote in gostote po stiskanju (s potresanjem) (ISO 9161:2019)

Uranium dioxide powder - Determination of apparent density and tap density (ISO 9161:2019)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Poudre de dioxyde d'uranium - Détermination de la masse volumique apparente et de la masse volumique après tassement (ISO 9161:2019)

<https://standards.iteh.ai/catalog/standards/sist/5773ea05-ff1b-4cd4-a8b3-4b51a27353/sist-pr-en-iso-9161-2020>

Ta slovenski standard je istoveten z: prEN ISO 9161

ICS:

27.120.30

Cepljivi materiali in jedrska
gorivna tehnologija

Fissile materials and nuclear
fuel technology

oSIST prEN ISO 9161:2020

en,fr,de

INTERNATIONAL STANDARD

**ISO
9161**

Second edition
2019-02

Uranium dioxide powder — Determination of apparent density and tap density

*Poudre de dioxyde d'uranium — Détermination de la masse
volumique apparente et de la masse volumique après tassement*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN ISO 9161:2021

[https://standards.iteh.ai/catalog/standards/sist/5773ea05-ff1b-4cd4-a8b3-
eb031c872353/sist-en-iso-9161-2021](https://standards.iteh.ai/catalog/standards/sist/5773ea05-ff1b-4cd4-a8b3-eb031c872353/sist-en-iso-9161-2021)



Reference number
ISO 9161:2019(E)

© ISO 2019

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN ISO 9161:2021

[https://standards.iteh.ai/catalog/standards/sist/5773ea05-ff1b-4cd4-a8b3-
eb031c872353/sist-en-iso-9161-2021](https://standards.iteh.ai/catalog/standards/sist/5773ea05-ff1b-4cd4-a8b3-eb031c872353/sist-en-iso-9161-2021)



COPYRIGHT PROTECTED DOCUMENT

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Principle	1
4.1 Apparent density.....	1
4.2 Tap density.....	1
5 Apparatus	2
6 Sampling and samples	3
7 Procedure	3
7.1 Safety precautions.....	3
7.2 Calibration.....	4
7.3 Determination of the apparent density.....	4
7.4 Determination of tapped density.....	4
7.5 Number of determinations.....	4
7.6 Quality control.....	5
8 Expression of results	5
8.1 Method of calculation.....	5
8.2 Precision.....	5
9 Test report	5
Bibliography	7

ISO 9161:2019(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 85, *Nuclear energy, nuclear technologies, and radiological protection*, Subcommittee SC 5, *Nuclear installations, processes and technologies*.

This second edition cancels and replaces the first edition (ISO 9161:2004), which has been technically revised.

The main changes compared to the previous edition are as follows:

- an introduction has been added;
- definitions in [Clause 3](#) have been updated;
- safety precautions have been updated.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

Uranium dioxide (UO₂) powder is the source material for the manufacture of nuclear fuel as pellets, and is produced for use in nuclear reactors by a variety of processes. Specifications for UO₂ powder used in the production of sintered pellets as a nuclear fuel are given in standards such as ASTM C753^[5] or specifications supplied by the user. These specifications can include requirements for apparent (or bulk) density, tap density, or both.

This document specifies a method for determination of the apparent density and tap density of free-flowing UO₂ powder, and can be used for a variety of powder types. The method can also be applied to other fuel powders, and to powder mixtures, to demonstrate compliance with appropriate specifications for those powders.

It has been assumed in the preparation of this document that the execution of its provisions and the interpretation of the results obtained are entrusted to appropriately qualified and experienced people.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN ISO 9161:2021

[https://standards.iteh.ai/catalog/standards/sist/5773ea05-ff1b-4cd4-a8b3-
eb031c872353/sist-en-iso-9161-2021](https://standards.iteh.ai/catalog/standards/sist/5773ea05-ff1b-4cd4-a8b3-eb031c872353/sist-en-iso-9161-2021)

Uranium dioxide powder — Determination of apparent density and tap density

1 Scope

This document specifies a method of determining the apparent density and tap density of free-flowing uranium dioxide (UO_2) powder which will be used for pelleting and sintering of UO_2 pellets as a nuclear fuel.

This method can be used for different UO_2 powder types including grains, granules, spheres or other kinds of particles. The method can also be applied to other fuel powders as PuO_2 , ThO_2 and powder mixtures as $\text{UO}_2\text{-PuO}_2$ and $\text{UO}_2\text{-Gd}_2\text{O}_3$.

This document is based on the principle of using a flowmeter funnel (see 4.1). Other measurement apparatus, such as a Scott volumeter, can also be used.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

3.1

apparent density

loose bulk density

dry mass per unit volume of a powder obtained by free pouring under specified conditions

3.2

tap density

dry mass per unit volume of a powder in a container that has been tapped under specified conditions

4 Principle

4.1 Apparent density


A portion of sample is allowed to fall through a funnel of standard dimensions into a tared density cup filled up to a mark which defines a distinct volume. The cup and contents are weighed to determine the mass of the material in the known volume. The apparent density is calculated from the mass and volume of the powder.

4.2 Tap density

A calibrated density cup containing a weighed portion of sample is tapped by means of a special apparatus. The tapping conditions are fixed. The tap density is determined from the mass and volume of the powder after the treatment.

5 Apparatus

5.1 Powder flowmeter funnel, having an orifice diameter, d , of 2,5 mm, 5,0 mm, 10 mm or 15 mm, depending on the powder type, having a conical angle of 60° and some means of closing the orifice (see Figure 1).

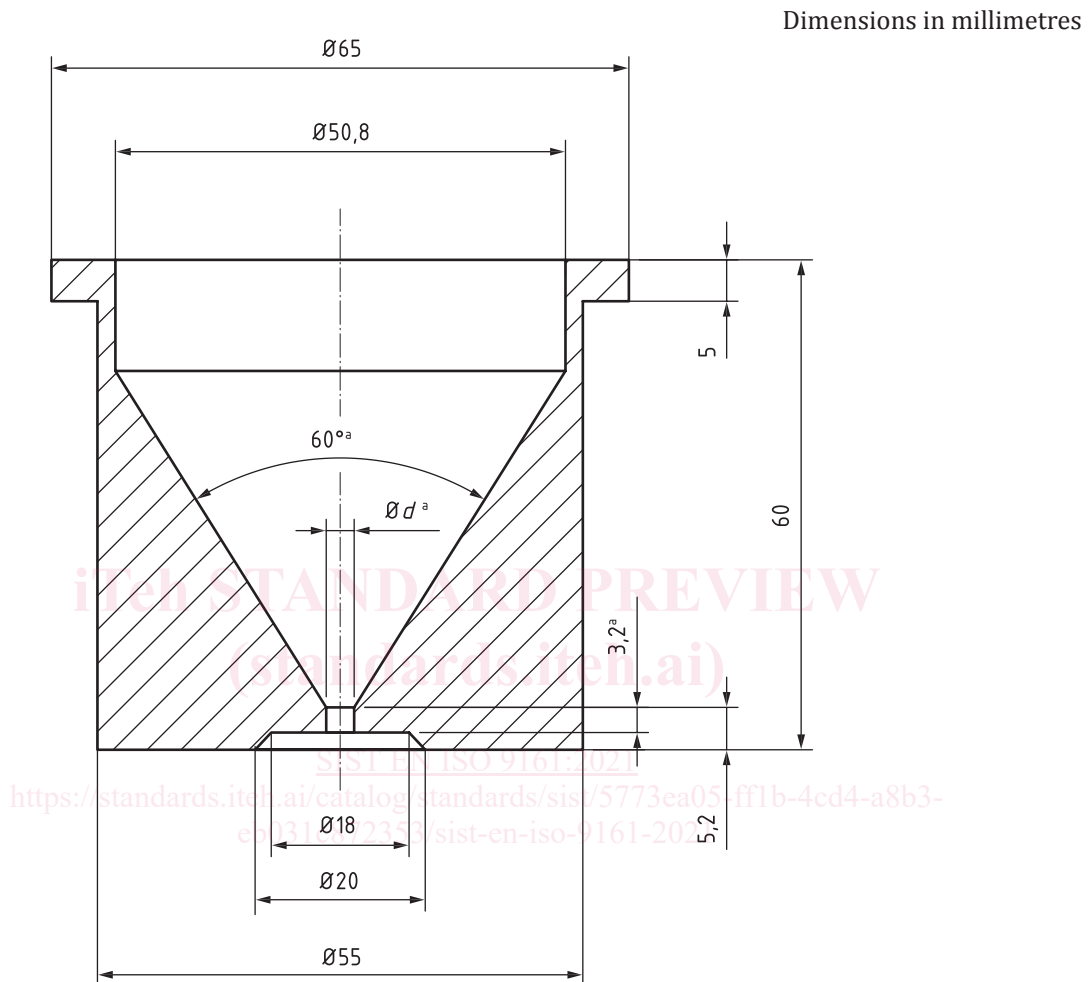

Key

$d = 2,5^{+0,2}_0, 5,0^{+0,2}_0, 10,0^{+0,2}_0$ or $15,0^{+0,2}_0$

^a These dimensions are mandatory.

Figure 1 — Powder flowmeter funnel (according to Reference [1])

5.2 Density cup, a graduated cylindrical cup having a capacity of 10 cm³, 25 cm³, 50 cm³ or 100 cm³, depending on the powder type.

5.3 Tapping device, consisting, for example, of a baseplate which is tapped by a motor with worm drive and a cam shaft speed of $(250 \pm 15) \text{ min}^{-1}$ and enabling a tapping stroke travel of about 2 mm to 3 mm.

5.4 Adjustable counter, which can be preset to deliver a number of taps between 1 and 9 999.