



**SLOVENSKI STANDARD**  
**SIST ISO 7798:2018**

**01-september-2018**

**Nadomešča:**  
**SIST ISO 7798:1995**

---

**Tekaške smuči - Določevanje utrujenosti - Preskus s cikličnim obremenjevanjem**

Cross-country skis -- Determination of fatigue indexes -- Cyclic loading test

**iTeh STANDARD PREVIEW**  
Skis de fond -- Détermination des indices de fatigue -- Essai en flexion alternée  
**(standards.iteh.ai)**

**Ta slovenski standard je istoveten z: ~~SIST ISO 7798:2018~~ ISO 7798:2017**

<https://standards.iteh.ai/catalog/standards/sist/5e3b1d24-e8a5-470e-a78d-ee9e2fa04fe/sist-iso-7798-2018>

---

**ICS:**

97.220.20      Oprema za zimske športe      Winter sports equipment

**SIST ISO 7798:2018**

**en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST ISO 7798:2018

<https://standards.iteh.ai/catalog/standards/sist/5e3b1d24-e8a5-470e-a78d-ecfae2fa04fe/sist-iso-7798-2018>

INTERNATIONAL  
STANDARD

ISO  
7798

Second edition  
2017-11

---

---

**Cross-country skis — Determination  
of fatigue indexes — Cyclic loading test**

*Skis de fond — Détermination des indices de fatigue — Essai en  
flexion alternée*

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST ISO 7798:2018](https://standards.iteh.ai/catalog/standards/sist/5e3b1d24-e8a5-470e-a78d-ecfae2fa04fe/sist-iso-7798-2018)

<https://standards.iteh.ai/catalog/standards/sist/5e3b1d24-e8a5-470e-a78d-ecfae2fa04fe/sist-iso-7798-2018>



Reference number  
ISO 7798:2017(E)

© ISO 2017

## iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST ISO 7798:2018

<https://standards.iteh.ai/catalog/standards/sist/5e3b1d24-e8a5-470e-a78d-ecfae2fa04fe/sist-iso-7798-2018>



### **COPYRIGHT PROTECTED DOCUMENT**

© ISO 2017, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
copyright@iso.org  
www.iso.org

# Contents

Page

Foreword.....	iv
<b>1 Scope.....</b>	<b>1</b>
<b>2 Normative references.....</b>	<b>1</b>
<b>3 Terms and definitions.....</b>	<b>1</b>
<b>4 Principle.....</b>	<b>2</b>
<b>5 Apparatus.....</b>	<b>2</b>
<b>6 Test specimens.....</b>	<b>5</b>
<b>7 Temperatures for conditioning and testing.....</b>	<b>5</b>
<b>8 Test procedure.....</b>	<b>5</b>
8.1 Measurement of original weighted bottom camber, $h_B$ .....	5
8.2 Measurement of the spring constant of the deflected ski portion, $c_F$ .....	6
8.3 Determination of stroke length, $s$ .....	6
8.4 Testing.....	6
8.5 Measurement of final weighted bottom camber, $h'_B$ .....	6
8.6 Assessment of damage.....	6
<b>9 Expression of results.....</b>	<b>7</b>
<b>10 Test report.....</b>	<b>7</b>

**ITeH STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST ISO 7798:2018

<https://standards.iteh.ai/catalog/standards/sist/5e3b1d24-e8a5-470e-a78d-ecfae2fa04fe/sist-iso-7798-2018>

## ISO 7798:2017(E)

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html). (standards.iteh.ai)

This document was prepared by Technical Committee ISO/TC 83, *Sports and other recreational facilities and equipment*, Subcommittee SC 4, *Snowsports equipment*.

This second edition cancels and replaces the first edition (ISO 7798:1984), which has been technically revised.

# Cross-country skis — Determination of fatigue indexes — Cyclic loading test

## 1 Scope

This document specifies a method for the determination of the fatigue indexes of cross-country skis (i.e. the resistance of the skis to changes of bottom camber height or irreversible damage) after a bending test with cyclic loading.

It is applicable to cross-country skis with a nominal length of 160 cm to 215 cm.

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 7139, *Cross-country skis — Determination of elastic properties*

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

### 3.1

#### original weighted bottom camber

$h_B$

maximum distance between the bottom surface of the ski in the binding mounting area and a flat and horizontal surface, measured under the influence of the ski's own mass, determined prior to the test

### 3.2

#### final weighted bottom camber

$h'_B$

maximum distance between the bottom surface of the ski in the binding mounting area and a flat and horizontal surface, measured under the influence of the ski's own mass, determined after the test

### 3.3

#### spring constant of the deflected part of the ski

$c_F$

ratio of the force,  $F$ , applied midway between two supports, to the corresponding deflection,  $f$ , when the ski is placed on the supports as shown in [Figure 4](#)

$$c_F = \frac{F}{f}$$

## ISO 7798:2017(E)

### 3.4 stroke length

 $s$ 

deflection of the ski during cyclic loading measured from a plane tangent to the supports, midway between the two supports

### 3.5 frequency

 $f$ 

number of deflections of the ski per second

### 3.6 recovery time

time between the end of the test and the measurement of  $h'_B$  which is necessary to eliminate temporary changes in bottom camber

### 3.7 fatigue index

 $K_h$ 

percentage change of bottom camber height of the ski after cyclical loading and recovery time

## 4 Principle

The ski is subjected to cyclic loading and recovery. The fatigue indexes are determined by calculation of the percentage permanent change in bottom camber height.

## 5 Apparatus

### 5.1 Cyclic bending machine.

The cyclic bending machine shall be constructed essentially as shown in [Figure 1](#). The machine has two supports which are vertically and horizontally adjustable. The support rolls shall have a diameter of approximately 5 cm. The supports shall have spring loaded clamping rolls in order to prevent lifting of the ski.

The driving mechanism consists of a disk fly wheel with adjustable crank pin, a connecting rod and a push rod with clamping fixture. The disk fly wheel shall have sufficient mass and driving power to effect a smooth sinusoidal flexing. The distance between crank pin and rotation axis shall be adjustable in order to be able to adjust the proper stroke length with respect to the spring constant of the deflected part of the ski (see [Figure 3](#)).

The frequency of the stroke shall be between 2 Hz and 3 Hz. The clamping fixture shall have a pitting joint and jaws with elastic rubber layers, as shown in [Figure 2](#), in order to avoid stress concentration at the clamp.

Dimensions of the rubber layer shall be as follows.

- Thickness:  $(4 \pm 1)$  mm
- Width: 40 mm
- Hardness:  $(95 \pm 5)$  Shore A

In addition, a counter shall be fixed to the push rod in order to record the number of cycles.

### 5.2 Measuring device for bottom camber height.

For measuring the weighted bottom camber, a flat surface plate and a dial indicator with indicator holder shall be used.



### 5.3 Measuring device for spring constant of the deflected part of the ski.

For measuring the spring constant of the deflected part of the ski, a device as described in ISO 7139 shall be used.

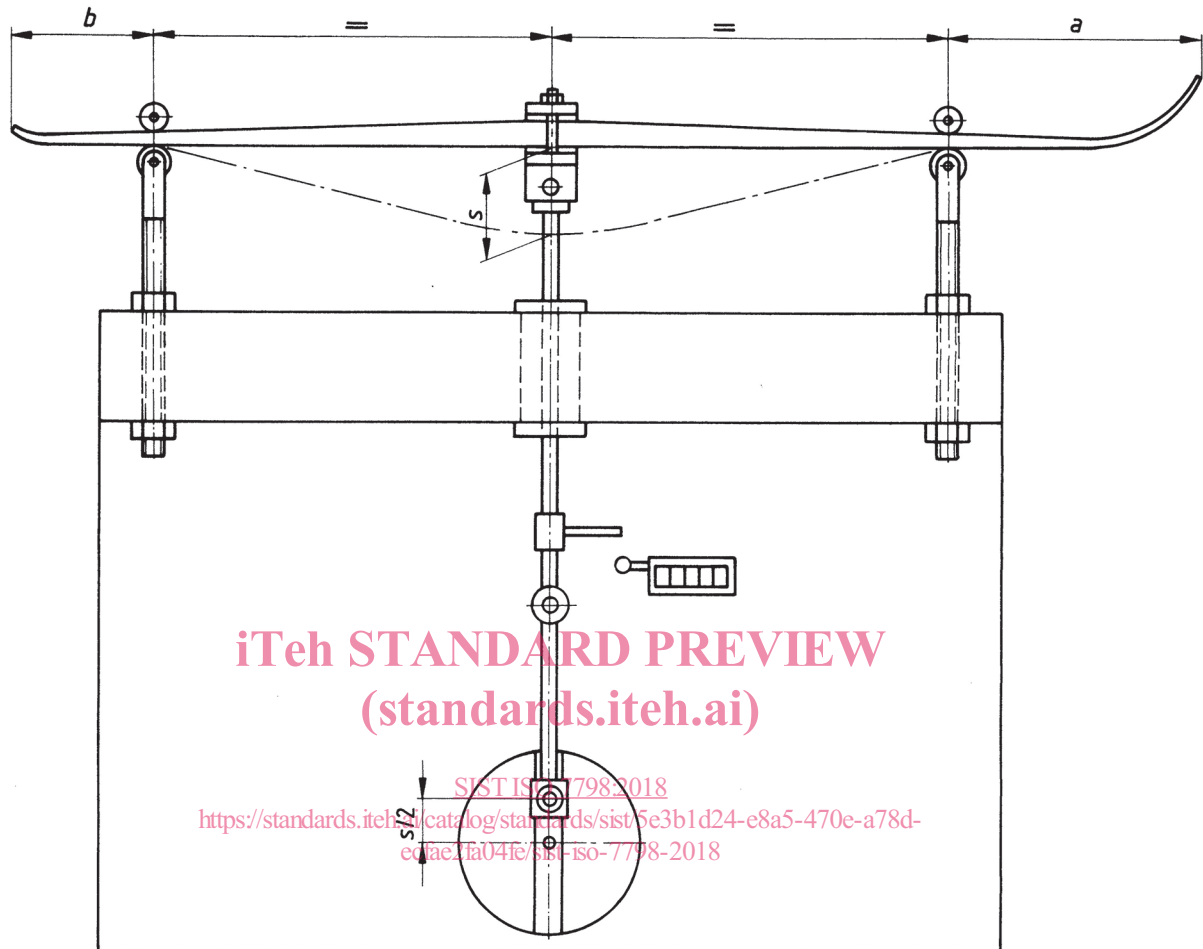


Figure 1 — Cyclic bending machine