
**Optics and photonics — Camera
lenses — Measurement of ISO spectral
transmittance**

*Optique et photonique — Objectifs photographiques — Mesurage du
facteur spectral de transmission ISO*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 8478:2017](https://standards.iteh.ai/catalog/standards/sist/cb913c84-3008-4b84-a03e-9b378b0c7f85/iso-8478-2017)

<https://standards.iteh.ai/catalog/standards/sist/cb913c84-3008-4b84-a03e-9b378b0c7f85/iso-8478-2017>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 8478:2017

<https://standards.iteh.ai/catalog/standards/sist/cb913c84-3008-4b84-a03e-9b378b0c7f85/iso-8478-2017>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2017, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

Page

Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Apparatus.....	2
5 Conditions.....	3
6 Procedure.....	4
7 Presentation of the results.....	5
Annex A (normative) Method for measuring spectral transmittance of mirror lenses.....	6
Bibliography.....	8

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 8478:2017](https://standards.iteh.ai/catalog/standards/sist/cb913c84-3008-4b84-a03e-9b378b0c7f85/iso-8478-2017)

<https://standards.iteh.ai/catalog/standards/sist/cb913c84-3008-4b84-a03e-9b378b0c7f85/iso-8478-2017>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html. (standards.iteh.ai)

This document was prepared by Technical Committee ISO/TC 172, *Optics and photonics*, Subcommittee SC 1, *Fundamental standards*. ISO 8478:2017

<https://standards.iteh.ai/catalog/standards/sist/cb913c84-3008-4b84-a03e->

This second edition cancels and replaces the first edition (ISO 8478:1996), of which it constitutes a minor revision.

The main changes compared to the previous edition are as follows:

- the document has been updated to current drafting rules;
- [A.2](#) b) has been adjusted.

Introduction

This document describes a preferred method for the measurement of spectral transmittance. Alternative methods may be used, provided that the method gives the same result as that obtained according to this document within the tolerances allowed by it. In the case of lenses with very long or short focal lengths and in large aperture lenses, care should be taken to maintain the ideal integration properties of the integrating sphere.

Spectral transmittance of the lens under test may vary with the diameter of the incident beam and with the angle of incidence of the beam. In order to obtain uniform results, this document specifies that the measurement is to be made with a collimated beam incident upon the lens along its optical axis, and filling the central half diameter of its entrance pupil at its minimum f -number.

In the case of lenses with very long or short focal lengths, the measuring method specified in this document may not be applicable due to the difficulty in preparing a very big or very small integrating sphere. In such a case, an alternative method may be used, provided that it gives the same result as that obtained according to this document within the tolerances allowed by this document.

[Annex A](#), which forms an integral part of this document, is provided to give a particular method for measuring the spectral transmittance of mirror lenses.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 8478:2017](#)

<https://standards.iteh.ai/catalog/standards/sist/cb913c84-3008-4b84-a03e-9b378b0c7f85/iso-8478-2017>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 8478:2017

<https://standards.iteh.ai/catalog/standards/sist/cb913c84-3008-4b84-a03e-9b378b0c7f85/iso-8478-2017>

Optics and photonics — Camera lenses — Measurement of ISO spectral transmittance

1 Scope

This document specifies a method for measuring the spectral transmittance of camera lenses. It describes particular conditions for measuring the axial spectral transmittance, over a wavelength range from 350 nm to 700 nm, of camera lenses which are intended to be used mainly for taking pictures of very distant objects.

If the spectral transmittance values are used exclusively for the calculation of the ISO colour contribution index (see ISO 6728) throughout this document, the wavelength range reads 370 nm to 680 nm.

This document is also applicable to mirror lenses (see [Annex A](#)).

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

photographic lens

lens used for recording the image of an object on photosensitive material, such as a camera or enlarging lens

Note 1 to entry: A projection lens is not a photographic lens.

3.2

camera lens

lens attached to a still camera used for taking pictures of an object

3.3

spectral transmittance of a lens

transmittance denoted by $\tau(\lambda)$ and defined by the formula

$$\tau(\lambda) = \frac{\Phi_{\tau,\lambda}}{\Phi_{i,\lambda}}$$

where


$\Phi_{\tau,\lambda}$ is the transmitted radiant flux of wavelength, λ ;

$\Phi_{i,\lambda}$ is the corresponding incident radiant flux of wavelength, λ .


4 Apparatus

The apparatus (see [Figure 1](#)) shall consist of a light source, a condenser lens, a monochromator (or narrow bandwidth filters, in limited applications), an aperture stop, a collimator and an integrating sphere together with a photoelectric detector system.

NOTE Narrow-band filters are subject to errors due to inter-reflections with other components. The use of narrow-band filters should be limited to applications where proper corrections can be applied.

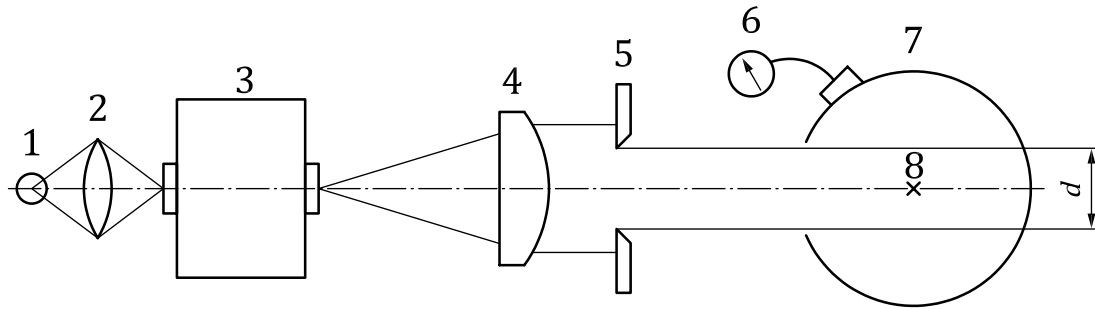

a) Using a collimator lens

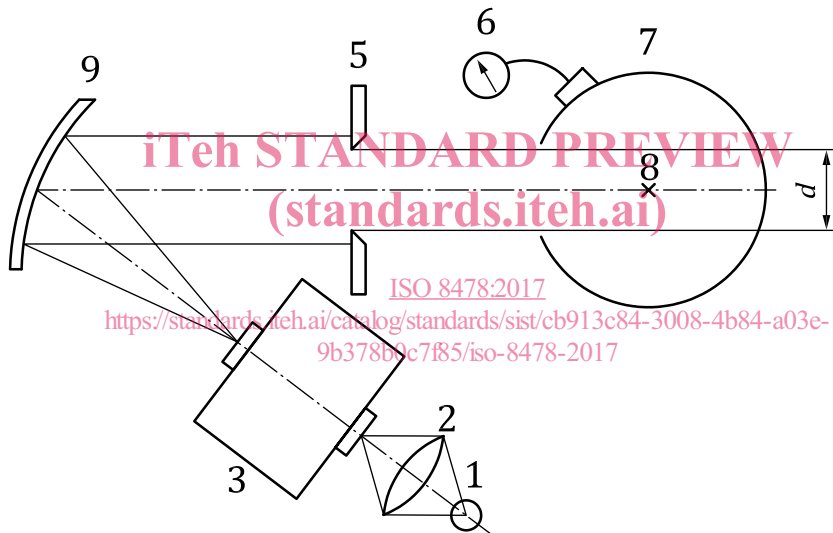

b) Using an off-axis paraboloid mirror collimator

Key

- | | |
|-------------------|--------------------------------|
| 1 light source | 6 detector system |
| 2 condenser lens | 7 integrating sphere |
| 3 monochromator | 8 centre of integrating sphere |
| 4 collimator lens | 9 collimator mirror |
| 5 aperture stop | <i>d</i> diameter of beam |

Figure 1 — Arrangement of the apparatus (test lens not shown)

4.1 Light sources

The light source shall be capable of emitting a spatially and temporally stable radiant flux over the wavelength range of 350 nm to 700 nm. Spatial variations shall not exceed the acceptance angle of the condenser; temporal variation shall be less than 1 %.

4.2 Monochromator

The monochromator shall preferably be a double monochromator which shall employ two prisms or two gratings, or one prism and one grating.

If a grating monochromator is used, it shall employ a filter or filters to cut off the higher-order diffracted radiation. The wavelength range shall be from 350 nm to 700 nm.

Narrow-band filters may be used in place of the monochromator, provided that there are sufficient filters to cover the required wavelength interval, and the filters shall have sufficient blocking outside the pass band. Corrections shall be applied for inter-reflections.

For both the monochromator and the narrow-band filters, the wavelength interval and bandwidth shall be 10 nm or less and adjustable. A 20 nm interval and bandwidth is satisfactory in the spectral region where the transmittance variance is less than 0,2 % per nanometre. For the calculation of the ISO colour contribution index, 10 nm intervals are required.

4.3 Collimator

The collimator shall be either a lens or a mirror. In both cases, its focal length shall be at least 30 times the length of the monochromator exit slit.

If a lens is used, its focal length should not change by more than 1 % for any monochromatic radiation within a wavelength range from 350 nm to 700 nm.

If a mirror is used, it shall preferably be of off-axis paraboloid design.

4.4 Aperture stop

The aperture stop shall be circular in shape and its diameter shall be adjustable.

4.5 Integrating sphere

The radius of the integrating sphere shall be selected such that the location and diameter of the beam on the rear wall of the integrating sphere is the same, with or without the lens in position, to within a tolerance of ± 50 %. The diameter of the entrance port shall be greater than half the diameter of the entrance pupil of the lens to be tested.

The spectral reflectance of the diffusing coating on the internal surface of the integrating sphere shall be as high and non-selective as possible over a wavelength range from 350 nm to 700 nm.

4.6 Detector

The detector shall have sufficient responsivity over a wavelength range from 350 nm to 700 nm. The detector's response, in combination with the electronic circuitry, shall be calibrated over the measuring range. The area of the detector shall be as small as possible and the surface of the detector shall be level with the inside surface of the integrating sphere (e.g. the surface of the detector shall be within ± 1 mm of the inside surface of the sphere). The spectral reflectance of the detector surface shall be as close as possible to that of the internal surface of the integrating sphere.

5 Conditions

5.1 The wavelength range shall be from 350 nm to 700 nm.

5.2 The wavelength interval shall be 10 nm or less. If spectral variation is less than 0,2 % per nanometre, the wavelength interval may be 20 nm, but not for the calculation of the ISO colour contribution index.