
**Routine analytical cigarette-smoking
machine — Additional test methods
for machine verification**

*Machine à fumer analytique de routine pour cigarettes — Méthodes
d'essais complémentaires pour la vérification de la machine*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 7210:2018](#)

<https://standards.iteh.ai/catalog/standards/sist/08352947-b798-408d-b231-b6eb00d6bb47/iso-7210-2018>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 7210:2018

<https://standards.iteh.ai/catalog/standards/sist/08352947-b798-408d-b231-b6eb00d6bb47/iso-7210-2018>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2018

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Determination of pressure drop.....	2
4.1 Principle.....	2
4.2 Apparatus.....	2
4.3 Test atmosphere.....	3
4.4 Procedure.....	4
4.4.1 General.....	4
4.4.2 Testing.....	4
4.5 Expression of results.....	4
5 Determination of significant puff profile parameters.....	4
5.1 Principle.....	4
5.2 Apparatus.....	4
5.2.1 General.....	4
5.2.2 System A.....	5
5.2.3 System B.....	5
5.2.4 Requirements for both systems.....	6
5.2.5 Expression of results.....	6
6 Verification of restricted smoking.....	6
6.1 Principle.....	6
6.2 Apparatus.....	6
6.3 Procedure.....	6
6.4 Expression of results.....	7
7 Soap film bubble flowmeter for the determination of the puff volume.....	7
7.1 General.....	7
7.2 Principle.....	7
7.3 Apparatus.....	8
7.3.1 Glass burette.....	8
7.3.2 Bubble generation.....	8
7.3.3 Bubble positioning.....	8
7.3.4 Wetting.....	9
7.3.5 Detergent solution.....	9
7.4 Procedure.....	9
7.4.1 Preparation.....	9
7.4.2 Performing a measurement.....	9

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html. (standards.iteh.ai)

This document was prepared by Technical Committee ISO/TC 126, *Tobacco and tobacco products*, Subcommittee SC 1, *Physical and dimensional tests*. ISO 7210:2018

This fourth edition cancels and replaces the third edition (ISO 7210:2013), which has been technically revised. <https://standards.iteh.ai/catalog/standards/sist/08352947-b798-408d-822a-6161041d4710/iso-7210-2018>

The main changes to the previous edition are as follows:

- the requirements given by the more intense smoking regime described in ISO 20778 have been included;
- a description for a soap film bubble flowmeter for the determination of the puff volume has been added.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Routine analytical cigarette-smoking machine — Additional test methods for machine verification

1 Scope

This document specifies additional test methods for routine analytical cigarette-smoking machines intended to check the conformity of these machines with ISO 3308 and ISO 20778.

It only establishes additional test methods for smoking machines and does not deal with actual smoking, which is described in other International Standards.

It is composed of four sections relating to

- the determination of pressure drop ([Clause 4](#));
- the determination of significant puff profile parameters ([Clause 5](#));
- the verification of restricted smoking ([Clause 6](#));
- the description of the soap film bubble flowmeter for the determination of the puff volume ([Clause 7](#)).

NOTE There are more possibilities for determining the aforementioned parameters. Systems giving the same results and accuracies can be used. The certificate of conformity with this standard can be obtained from the machine manufacturer.

2 Normative references

ISO 7210:2018

<https://standards.iteh.ai/catalog/standards/sist/08352947-b798-408d->

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3308, *Routine analytical cigarette-smoking machine — Definitions and standard conditions*

ISO 20778, *Cigarettes — Routine analytical cigarette smoking machine — Definitions and standard conditions with an intense smoking regime*

ISO 4387, *Cigarettes — Determination of total and nicotine-free dry particulate matter using a routine analytical smoking machine*

ISO 20779, *Cigarettes — Generation and collection of total particulate matter using a routine analytical smoking machine with an intense smoking regime*

ISO 3402, *Tobacco and tobacco products — Atmosphere for conditioning and testing*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

3.1

pressure drop

static pressure difference between the two ends of a pneumatic circuit (of a smoking machine) when it is traversed by an air flow under steady conditions in which the measured volumetric flow, under standard conditions, at the output end is 17,5 ml/s

3.2

puff profile

flow rate measured directly behind the butt end of the cigarette, and depicted graphically as a function of time

3.3

restricted smoking

condition that exists when the butt end of a cigarette is closed to the atmosphere between successive puffs

3.4

puff duration

interval of time during which the port of a smoking machine is connected to the suction mechanism

3.5

puff volume

volume of smoke leaving the butt end of a cigarette and passing through the smoke trap of a smoking machine

3.6

smoulder stream smoke

smoke which leaves the butt end of the cigarette during the interval of time between successive puffs

3.7

port

aperture of the suction mechanism through which a puff is drawn and to which is attached a smoke trap

3.8

channel

element of a smoking machine consisting of one or more cigarette holders, one trap and a means of drawing a puff through the trap

3.9

bubble

liquid film (of surface-active agent/wetting agent/detergent solution) extending over the cross section of a pipe

4 Determination of pressure drop


4.1 Principle

Measurement, under well-specified air flow conditions, of the pressure drop of a smoking machine by means of an appropriate manometer.


4.2 Apparatus

The test apparatus shall be capable of


- sucking a constant flow of air which is unaffected by the pressure drop of the system under test;
- measuring the pressure drop with sufficient accuracy.

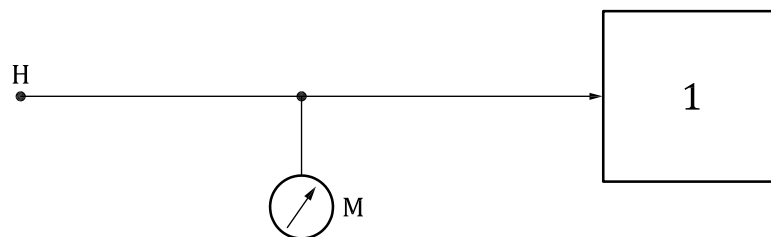


a) Zero setting manometer

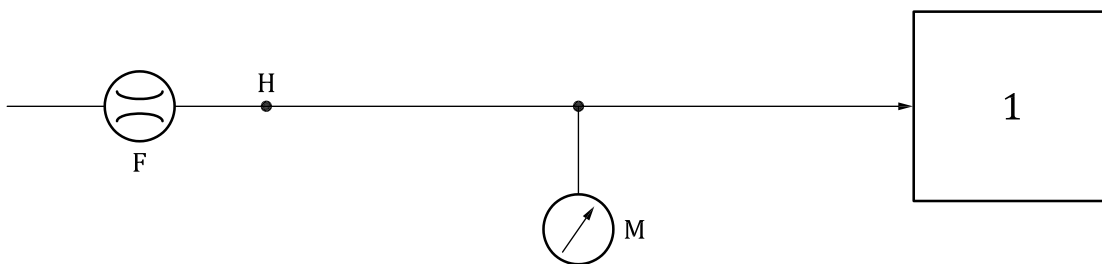

b) Air flow setting

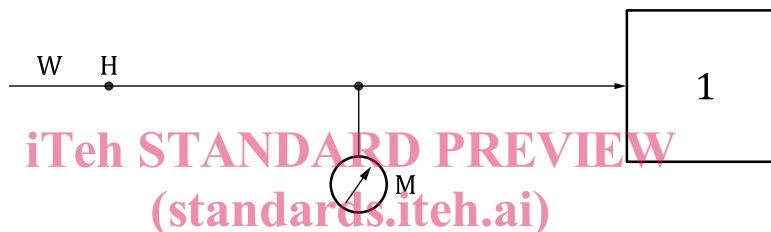

c) Determination pressure drop PD_1

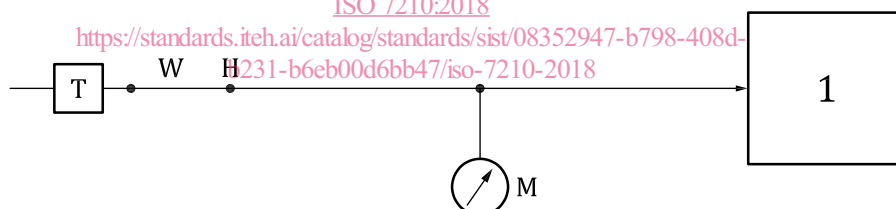

d) Determination pressure drop PD_2

Key

- 1 flow generator
- H test head point
- F flowmeter
- W wide-bore tubing
- T smoking machine under test
- M manometer

NOTE Arrows indicate the direction of air flow.

Figure 1 — Pneumatic circuit of a typical apparatus

4.3 Test atmosphere

All measurements shall be carried out under standard ambient conditions of temperature and relative humidity as specified in ISO 3402.

4.4 Procedure

4.4.1 General

The flow of air through the smoking machine shall always be in the same direction as during the puffing cycle, i.e. from the cigarette to the suction source. The air used for measurement shall be from the test atmosphere.

4.4.2 Testing

4.4.2.1 Connect the manometer, M, as indicated in [Figure 1 a\)](#) and set it to zero.

4.4.2.2 Connect the flowmeter, F, as indicated in [Figure 1 b\)](#) and establish an air flow of $17,5 \text{ ml} \pm 0,5 \text{ ml/s}$.

4.4.2.3 Disconnect the flowmeter, F, and if needed in regard to [4.4.2.4](#) attach a suitable length of wide-bore tubing, W, to the test head point, H, as indicated in [Figure 1 c\)](#). Read the pressure, if any, on the manometer, M. Record the value as PD_1 .

4.4.2.4 Attach the free end of the wide-bore tubing, W, to the point in the smoking machine from which the puffing source was disconnected as indicated in [Figure 1 d\)](#). Read the pressure on the manometer, M. Record the value as PD_2 .

4.4.2.5 Calculate the pressure drop ($PD_2 - PD_1$).

4.4.2.6 Repeat the operation for each channel of the smoking machine.

4.5 Expression of results

The following values shall be recorded:

- the pressure drop for each channel, in pascals;
- the test atmosphere used.

5 Determination of significant puff profile parameters

5.1 Principle

Continuous measurement of the flow rate of air of a puff through a pressure drop device of $1\ 000 \text{ Pa} \pm 50 \text{ Pa}$ (see ISO 3308 and ISO 20778).

5.2 Apparatus

5.2.1 General

The apparatus shall comprise the elements shown in the principle diagram ([Figure 2](#)), i.e. the diagram of elements required for the two alternative measuring systems, A and B, with two different levels of sophistication.

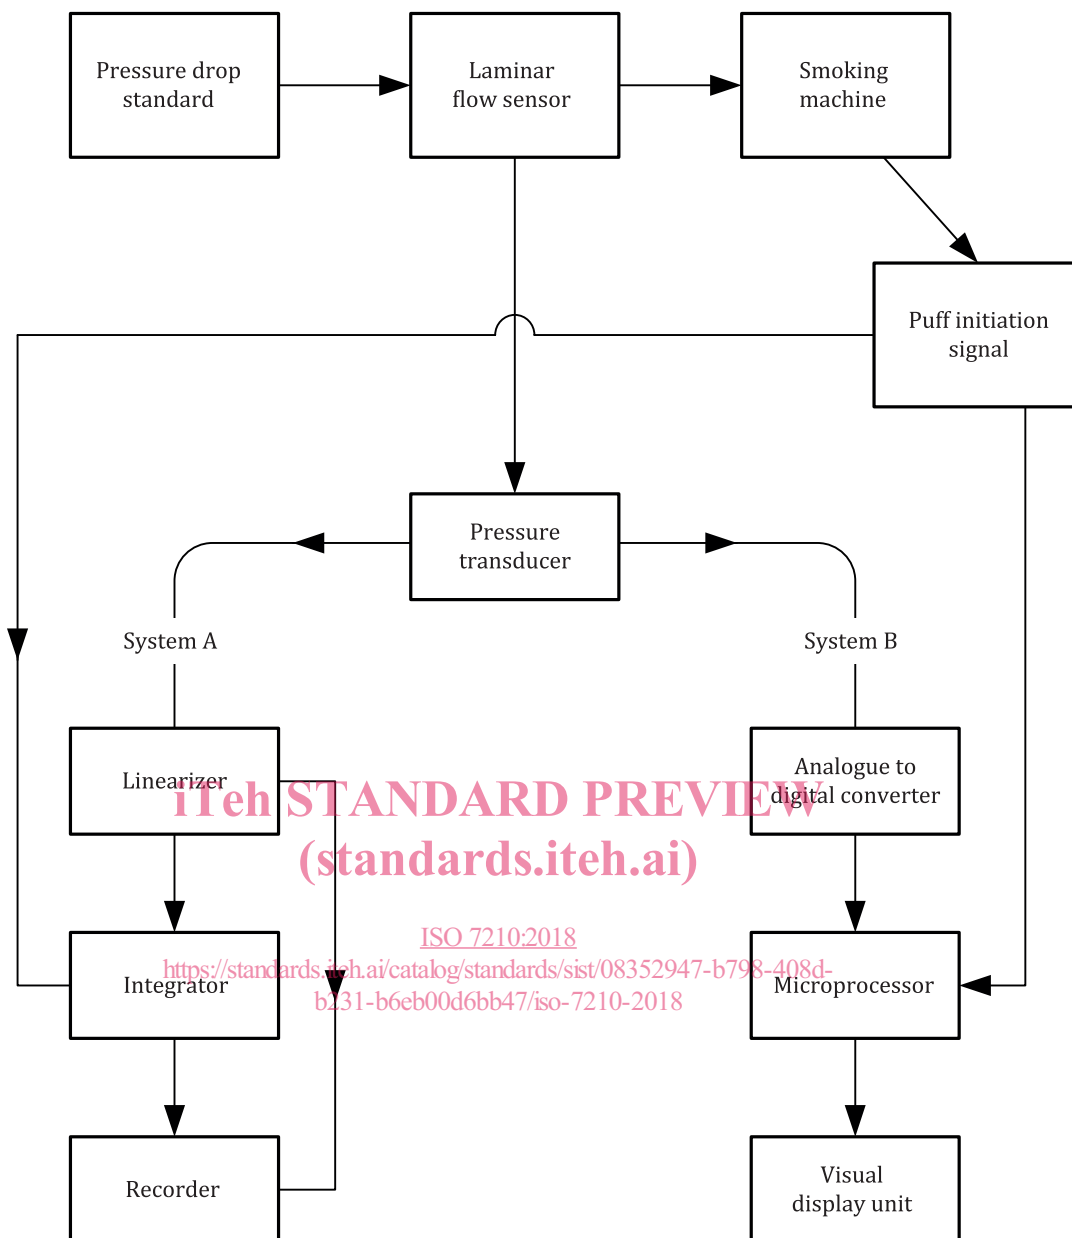


Figure 2 — Principle diagram

5.2.2 System A

The signal delivered by the pressure transducer is linearized by appropriate circuits and transmitted to an integrator and a recording apparatus.

The system can record a picture of the puff profile and measure its volume.

5.2.3 System B

This system uses digital conversion and a computer to produce the same information as it is given by system A.