
**Cylindrical cork stoppers — Physical
tests —**

**Part 8:
Determination of capillarity**

*Bouchons cylindriques en liège — Essais physiques —
Partie 8: Détermination de la capillarité*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 9727-8:2022

<https://standards.iteh.ai/catalog/standards/sist/bc32d37a-2829-4699-9854-bd28a7bd8fe0/iso-9727-8-2022>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 9727-8:2022](https://standards.iteh.ai/catalog/standards/sist/bc32d37a-2829-4699-9854-bd28a7bd8fe0/iso-9727-8-2022)

<https://standards.iteh.ai/catalog/standards/sist/bc32d37a-2829-4699-9854-bd28a7bd8fe0/iso-9727-8-2022>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2022

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Products reagents	1
4.1 Reference method.....	1
4.2 Rapid method.....	1
4.3 Very fast control method.....	1
5 Apparatus	1
6 Test conditions	2
6.1 Environment.....	2
6.2 Cork stopper.....	2
6.2.1 Temperature.....	2
7 Sampling	2
8 Procedure	2
8.1 Reference method.....	2
8.2 Rapid method.....	2
8.3 Very fast control method.....	3
9 Measuring and reporting results	3
10 Test report	4

[ISO 9727-8:2022](https://standards.iteh.ai/catalog/standards/sist/bc32d37a-2829-4699-9854-bd28a7bd8fe0/iso-9727-8-2022)

<https://standards.iteh.ai/catalog/standards/sist/bc32d37a-2829-4699-9854-bd28a7bd8fe0/iso-9727-8-2022>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 87, *Cork*.

A list of all parts in the ISO 9727 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Cylindrical cork stoppers — Physical tests —

Part 8: Determination of capillarity

1 Scope

This document specifies the test method to determine the capillarity of cylindrical cork stoppers. It consists in measuring the capillary rise by dipping in a hydro-alcoholic solution containing a dye. Two methods using the same procedure but different concentrations of hydro-alcoholic solutions are described.

It is applicable to all types of cylindrical cork stoppers, ready for use.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 633, *Cork — Vocabulary* (standards.iteh.ai)

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 633 apply. [ISO 9727-8:2022](#)
[ISO 9727-8:2022](#)

4 Products reagents

4.1 Reference method

Ethanol solution at 12 % vol., (or more concentrated up to the volumetric % of the beverage to be packaged) prepared with demineralised water and coloured (methylene blue or other suitable colouring agent, at approximately 1 ‰ mass/volume).

4.2 Rapid method

Ethanol solution at 50 % vol., prepared with demineralised water and coloured (methylene blue or other suitable colouring agent, at approximately 1 ‰ mass/volume).

4.3 Very fast control method

Ethanol solution at 70 % vol., prepared with demineralised water and coloured (methylene blue or other suitable colouring agent, at approximately 1 ‰ mass/volume).

5 Apparatus

5.1 Crystallizer or other container, which can be closed or covered.

5.2 Bell jar or other closure system, to cover the crystallizer or the other container.

5.3 Absorbent paper.

5.4 Ruler or other measuring device, with a reading accuracy of 0,5 mm.

6 Test conditions

6.1 Environment

Test shall be carried out in an environment with the following characteristics:

- Temperature: $21\text{ °C} \pm 4\text{ °C}$.
- Relative air humidity: $60\% \pm 20\%$.

6.2 Cork stopper

6.2.1 Temperature

At the beginning of test confirm that stoppers of test sample are at $21\text{ °C} \pm 4\text{ °C}$.

7 Sampling

From each lot, take the amount of stoppers that correspond to the sampling plan previously agreed between interested parties.

Stoppers from the sample shall not show visible defects that may interfere with the performance of the measurement.

[ISO 9727-8:2022](#)

8 Procedure

8.1 Reference method

8.1.1 Fill a crystallizer or other container to a height of 3 mm with the coloured hydro-ethanolic solution (4.1) or 6 mm for measurements on chamfered stoppers.

8.1.2 Place the stoppers upright in the crystallizer or other container making sure that each of the stoppers is separated by about 1 cm from the other stoppers and/or the edges of the container.

8.1.3 Cover with the bell jar and leave in contact for 24 h.

8.2 Rapid method

8.2.1 Fill a crystallizer or other container to a height of 3 mm with the coloured hydro-ethanolic solution (4.2) or 6 mm for measurements on chamfered stoppers.

8.2.2 Place the stoppers upright in the crystallizer or other container making sure that each of the stoppers is separated by about 1 cm from the other stoppers and/or the edges of the container.


8.2.3 Cover with the bell jar and leave in contact for 1 h.

8.3 Very fast control method

8.3.1 Fill a crystallizer or other container to a height of 3 mm with the coloured hydro-ethanolic solution (4.3) or 6 mm for measurements on chamfered stoppers.

8.3.2 Place the stoppers upright in the crystallizer or other container making sure that each of the stoppers is separated by about 1 cm from the other stoppers and/or the edges of the container.

Cover with the bell jar and leave in contact for 10 min.

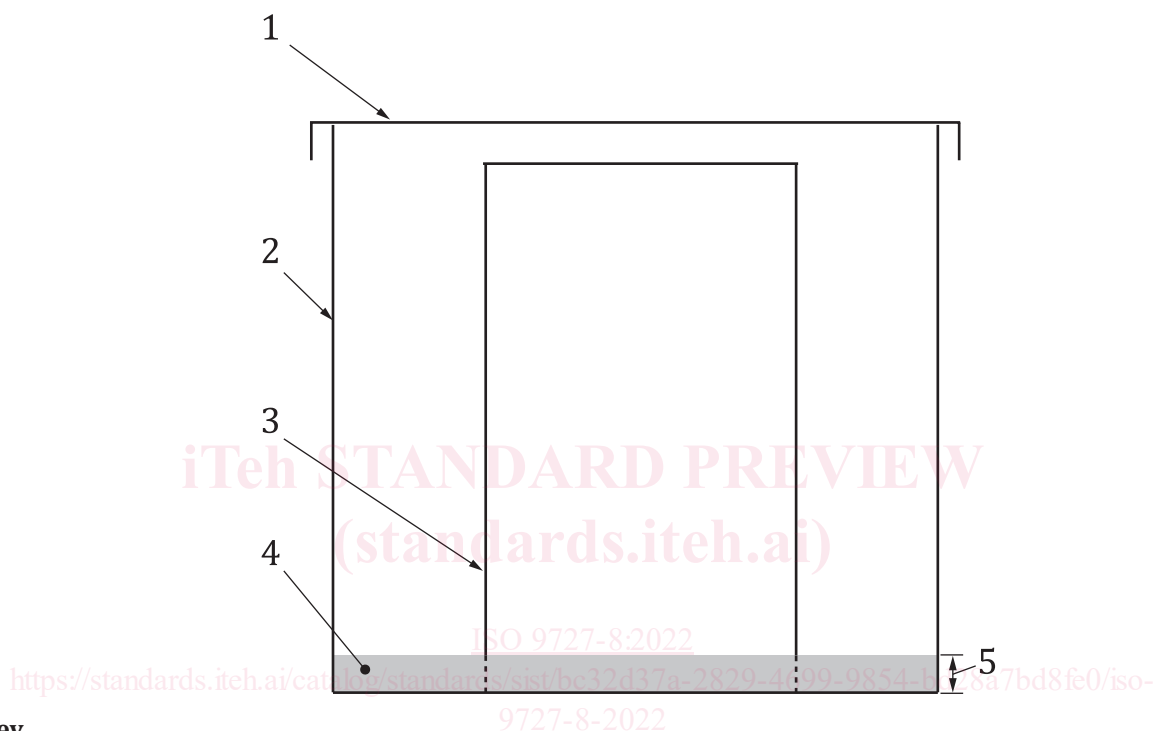

Key

- 1 bell jar
- 2 crystallizer or other container
- 3 cork stopper
- 4 coloured solution
- 5 height 3 mm (6 mm if chamfered stopper)

Figure 1 — Operating mode scheme

9 Measuring and reporting results

The maximum height of the capillary rises appearing on the periphery of the stoppers is measured.

We take into account the possible rises above the limit of the dye, excluding punctual rises along a discontinuity of the cork material.

The test result for each stopper in the sample shall be expressed in millimeters.

10 Test report

Test report shall include the following information:

- a) a reference to this document, i.e. ISO 9727-8:2022, specifying the volume fraction of the solution in % used as well as the dye used and the duration of contact;
- b) complete identification of the sample, including its type, and its origin;
- c) sampling report;
- d) results obtained;
- e) any deviation to this document that may have affected the results.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 9727-8:2022](https://standards.iteh.ai/catalog/standards/sist/bc32d37a-2829-4699-9854-bd28a7bd8fe0/iso-9727-8-2022)

<https://standards.iteh.ai/catalog/standards/sist/bc32d37a-2829-4699-9854-bd28a7bd8fe0/iso-9727-8-2022>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 9727-8:2022](https://standards.iteh.ai/catalog/standards/sist/bc32d37a-2829-4699-9854-bd28a7bd8fe0/iso-9727-8-2022)

<https://standards.iteh.ai/catalog/standards/sist/bc32d37a-2829-4699-9854-bd28a7bd8fe0/iso-9727-8-2022>