

FINAL
DRAFT

INTERNATIONAL
STANDARD

ISO/FDIS
20347

ISO/TC 94/SC 3

Secretariat: BSI

Voting begins on:
2021-10-04

Voting terminates on:
2021-11-29

Personal protective equipment — Occupational footwear

Équipement de protection individuelle — Chaussures de travail

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/FDIS 20347](https://standards.iteh.ai/catalog/standards/sist/26a0b981-d658-4ef1-9ab2-07b64ad5bb80/iso-fdis-20347)

<https://standards.iteh.ai/catalog/standards/sist/26a0b981-d658-4ef1-9ab2-07b64ad5bb80/iso-fdis-20347>

ISO/CEN PARALLEL PROCESSING

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.



Reference number
ISO/FDIS 20347:2021(E)

© ISO 2021

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/FDIS 20347](https://standards.iteh.ai/catalog/standards/sist/26a0b981-d658-4ef1-9ab2-07b64ad5bb80/iso-fdis-20347)

<https://standards.iteh.ai/catalog/standards/sist/26a0b981-d658-4ef1-9ab2-07b64ad5bb80/iso-fdis-20347>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Classification and designs.....	7
5 Basic requirements for occupational footwear.....	8
5.1 General.....	8
5.2 Design.....	10
5.2.1 General.....	10
5.2.2 Height of upper.....	10
5.2.3 Heel area.....	11
5.3 Whole footwear.....	11
5.3.1 Constructional performance.....	11
5.3.2 Leakproofness.....	11
5.3.3 Specific ergonomic features.....	12
5.3.4 Slip resistance.....	12
5.3.5 Innocuousness.....	12
5.3.6 Seam strength.....	12
5.4 Upper.....	13
5.4.1 General.....	13
5.4.2 Thickness.....	14
5.4.3 Tear strength.....	14
5.4.4 Tensile properties.....	14
5.4.5 Flexing resistance.....	14
5.4.6 Water vapour permeability and coefficient.....	15
5.4.7 Resistance to hydrolysis.....	15
5.5 Lining.....	15
5.5.1 General.....	15
5.5.2 Tear strength.....	15
5.5.3 Abrasion resistance.....	15
5.5.4 Water vapour permeability and coefficient.....	16
5.6 Tongue.....	16
5.6.1 General.....	16
5.6.2 Tear strength.....	16
5.7 Insole, insock and footbed.....	16
5.7.1 Thickness.....	16
5.7.2 Water permeability.....	16
5.7.3 Water absorption and desorption.....	16
5.7.4 Abrasion resistance.....	17
5.8 Outsole.....	17
5.8.1 General.....	17
5.8.2 Design.....	17
5.8.3 Tear strength.....	18
5.8.4 Abrasion resistance.....	18
5.8.5 Flexing resistance.....	18
5.8.6 Resistance to hydrolysis.....	18
5.8.7 Interlayer bond strength.....	18
6 Additional requirements for occupational footwear.....	19
6.1 General.....	19
6.2 Whole footwear.....	20
6.2.1 Perforation resistance.....	20
6.2.2 Electrical properties.....	21

6.2.3	Resistance to inimical environments.....	21
6.2.4	Energy absorption of seat region.....	22
6.2.5	Water resistance.....	22
6.2.6	Ankle protection.....	22
6.2.7	Cut resistance.....	22
6.2.8	Scuff cap abrasion.....	23
6.2.9	Slip resistance.....	23
6.3	Upper — Water penetration and absorption.....	23
6.4	Outsole.....	23
6.4.1	Resistance to hot contact.....	23
6.4.2	Resistance to fuel oil.....	23
6.4.3	Ladder grip.....	24
7	Marking.....	24
8	Manufacturer's instructions and information.....	25
8.1	General.....	25
8.2	Electrical properties.....	26
8.2.1	Partially conductive footwear.....	26
8.2.2	Antistatic footwear.....	26
8.3	Insocks.....	27
8.4	Perforation resistance.....	27
8.5	Date of obsolescence.....	28
Annex A (normative) Customized occupational footwear (occupational footwear adapted to fit an individual user or a single unit to fit an individual user).....		29
Annex B (informative) Assessment of the footwear by the wearer.....		33
Annex C (informative) Slip resistance.....		35
Annex ZA (informative) Relationship between this European Standard and the essential requirements of PPE Regulation (EU) 2016/425 aimed to be covered.....		38
Bibliography.....		40

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

ISO 20347 was prepared by the European Committee for Standardization (CEN) Technical Committee CEN/TC 161, *Foot and leg protectors*, in collaboration with Technical Committee ISO/TC 94, *Personal safety — Protective clothing and equipment*, Subcommittee SC 3, *Foot protection*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

This third edition cancels and replaces the second edition (ISO 20347:2012), which has been technically revised. The main changes compared to the previous edition are as follows:

- revision of the terms and definitions in [Clause 3](#);
- [Figure 1](#) to [Figure 4](#) revised;
- [Tables 1, 2](#) and [3](#) revised;
- heel area defined ([5.2.3](#));
- requirement on slip resistance revised ([5.3.4](#) and [6.2.8](#)); marking “SRA, SRB and SRC” deleted; marking “SR” and “Ø” introduced;
- pH value and chromium VI tests added in [5.3.5](#); former separate clauses under upper, lining, tongue and insole/insock deleted;
- requirement for seam strength of hybrid footwear added ([5.3.6](#));
- requirement for upper materials not fulfilling WVP explained ([5.4.6](#));
- abrasion of insoles revised ([5.7.4](#));
- outsole requirements revised ([5.8](#));
- outsole thickness revised ([5.8.2.1](#));
- flexing resistance of outsole clarified ([5.8.5](#));

ISO/FDIS 20347:2021(E)

- perforation resistant insert, depending on ISO 22568-3 and ISO 22568-4 exchanging EN 12568:2010;
- tolerance added ([6.2.3.1](#));
- former [Annex A](#) Hybrid Footwear included in the general text ([Table 2](#), [5.4.1.2](#));
- optional requirement on ankle protection clarified ([6.2.6](#));
- optional requirement for “SC” scuff caps added ([6.2.7](#));
- water penetration and absorption, symbol “WRU” deleted, symbol “WPA” introduced;
- optional requirement for “LG” Ladder grip of outsoles added ([6.4.3](#));
- marking revised ([Table 14](#) and [18](#));
- two new categories added, O6 and O7 ([Table 18](#));
- information on obsolescence date added ([8.5](#));
- [Annex A](#) with requirements for customized occupational footwear added;
- [Annex B](#) assessment of the footwear by the wearer added;
- [Annex C](#) Slip resistance added;
- requirement for electrically insulating footwear (EN 50321) deleted.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

ISO/FDIS 20347
<https://standards.iteh.ai/catalog/standards/sist/26a0b981-d658-4ef1-9ab2-07b64ad5bb80/iso-fdis-20347>

Personal protective equipment — Occupational footwear

1 Scope

This document specifies basic and additional (optional) requirements for occupational footwear used for general purpose. It includes, for example, mechanical risks, slip resistance, thermal risks, ergonomic behaviour. It also specifies requirements for occupational footwear equipped with customized insoles, customized occupational footwear or individual manufactured customized occupational footwear. This standard does not cover the property of high visibility because of interaction with the clothing (e.g. trousers cover the footwear) and work area conditions (e.g. dirt, mud).

Special risks are covered by complementary job-related standards (e.g. footwear for firefighters, electrical insulating footwear, protection against chain saw injuries, protection against chemicals and against molten metal splash, protection for motorcycle riders).

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 20344:—, *Personal protective equipment — Test methods for footwear*

EN 13832-3:2018, *Footwear protecting against chemicals — Part 3: Requirements for footwear highly resistant to chemicals under laboratory conditions*

<https://standards.iteh.ai/catalog/standards/sist/26a0b981-d658-4ef1-9ab2-07b64ad5bb80/iso-fdis-20347>

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

NOTE 1 The component parts of footwear are illustrated in [Figures 1, 2 and 3](#).

NOTE 2 Further terms and definitions can be found in ISO 19952^[1].

3.1

occupational footwear

footwear incorporating features to protect the wearer from injuries which could arise through accidents

3.2

upper

part or parts of a footwear that cover the toes, the top of the foot, the sides of the foot, and optionally the back of the heel; it is attached to the outsole of a footwear

3.3

leather

hide or skin tanned to be imperishable

3.3.1

leather split

flesh or middle part of a hide or skin, obtained by splitting a thick *leather* (3.3), which is tanned to be imperishable

3.4

rubber

type of elastic polymer material which can be vulcanized

3.5

polymeric material

large molecules composed of repeating structural units (monomer) typically connected by chemical bond

EXAMPLE Polyurethane (PU) or polyvinylchloride (PVC).

3.6

insole

non-removable component used to form the base of the shoe to which the *upper* (3.2) is usually attached during lasting

3.7

insock

removable or non-removable footwear component used to cover completely the insole

3.7.1

seat sock

removable or non-removable footwear component used to cover the insole in the heel area

3.7.2

footbed

insock designed according to the sole of the foot with or without the aim of correcting the posture

Note 1 to entry: "Non-removable" means that the component cannot be removed without any damage.

Note 2 to entry: "Removable" means that the component can be removed, but the protective features are only maintained when it is placed into the footwear while wearing.

3.8

lining

material covering the inner surface of the footwear

Note 1 to entry: The wearer's foot is in direct contact with the lining.

Note 2 to entry: Where an upper is split at the forepart to house the toe puff, or if an external piece of material is stitched to the upper to form a pocket to house the toe puff, the material under the toe puff acts as a lining.

3.9

cleat

protruding part of the outer surface of the outsole

3.10

outsole

outermost part to provide footwear with the necessary traction and protection from the floor surfaces it will be in contact with

3.10.1

rigid outsole

outsole, which can be bent less than an angle of 45° under a load of 30 N

Note 1 to entry: According to ISO 20344:—, 8.5.

3.10.2**multi-layer outsole**

made up of two or more material layers completely covering the entire surface; a tread cover of less than 0,5 mm is not considered a layer

3.11**perforation-resistant insert**

component placed in the outsole complex or used as an insole simultaneously in order to provide protection against perforation

3.12**scuff caps**

abrasion resistant materials or component to protect against scuff of the upper external toe region

3.13**heel area**

counter (stiffener) area, rear part of the footwear

3.14**partially conductive footwear**

footwear with low electrical resistance between the wearer and the ground, able to dissipate static electricity

3.15**antistatic footwear**

footwear maintaining some electrical resistance between the wearer and the ground, able to dissipate some static electricity

3.16**fuel oil**

aliphatic hydrocarbon constituent of petroleum

3.17**customized occupational footwear**

covering all individual customized footwear and other specific conditions of a foot

Note 1 to entry: They integrate in their design the recipient's own physiognomy and the specific arrangements aimed at modifying, correcting, compensating, curing, preventing, relieving a pathology, e.g. overweight, diabetes, hyperhidrosis, misalignments etc ...

Note 2 to entry: Several types of customized occupational footwear and footwear adaptations exist:

Type 1 — equipped with customized insoles

Occupational footwear (according to this document) incorporating a customized insoles adapted to the wearers needs.

Type 2 — modified occupational footwear

Occupational footwear (according to this document) modified from its original construction to fit to an individual user.

See examples in ISO 21064:2017,6.4

Type 3 — Bespoke occupational footwear

Occupational footwear (according to this document) constructed as a single unit to fit an individual user.

See examples in ISO 21064:2017, 6.3.2 and 6.3.3

Note 3 to entry: Adapted to fit an individual user or a single unit to fit an individual user.

Note 4 to entry: According to ISO 21064:2017, 3.2.

3.18 hybrid footwear

footwear that cannot be classified as footwear of class I or II


Note 1 to entry: There are two types of hybrid footwear (other than design E boots) see [3.18.1](#) and [3.18.2](#).

3.18.1 hybrid “moulded” footwear

vulcanized rubber or all moulded polymeric foot section, often including the outsole which can be unlined and usually does not incorporate an insole.

3.18.2 hybrid “mounted” footwear


vulcanized rubber or all moulded polymeric foot section that is manufactured separately and then constructed around a conventionally lasted lining/insole construction and often with a separately attached outsole.

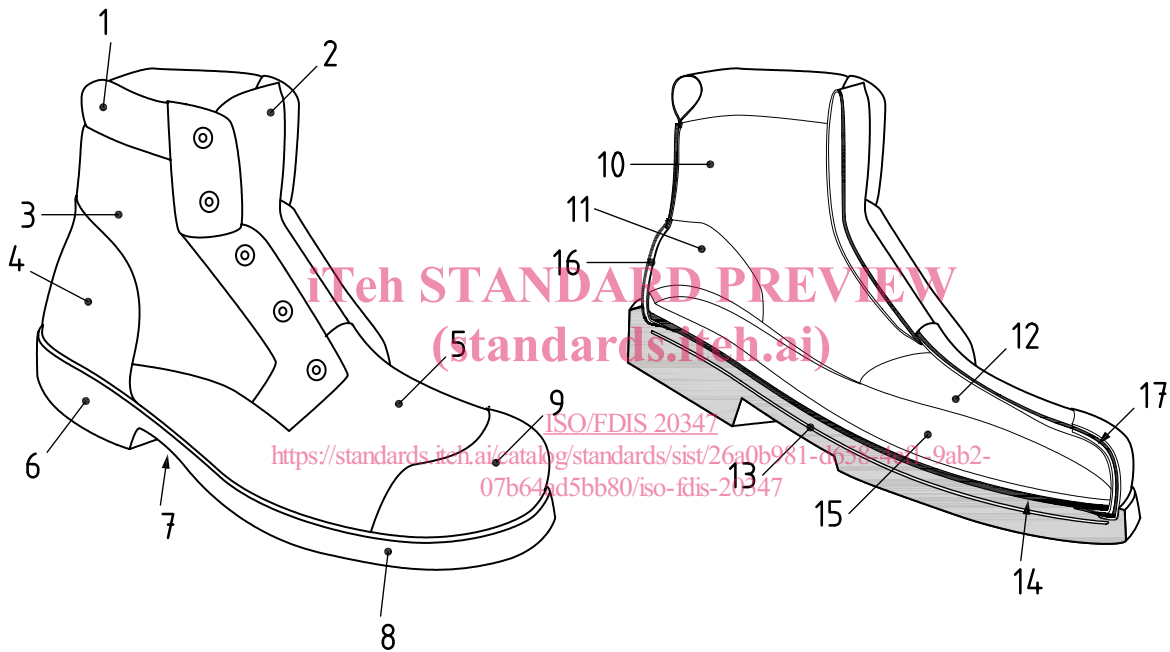

Key

- | | |
|----------------------|---------------------------------|
| 1 collar | 10 quarter lining |
| 2 tongue | 11 counter lining |
| 3 upper - quarter | 12 vamp lining |
| 4 upper - counter | 13 perforation resistant insert |
| 5 upper - vamp | 14 insole |
| 6 outsole - heel | 15 insock/footbed |
| 7 outsole - waist | 16 counter stiffener |
| 8 outsole - forepart | 17 toe puff stiffener |
| 9 scuff cap | |


Figure 1 — Example parts of class I occupational footwear

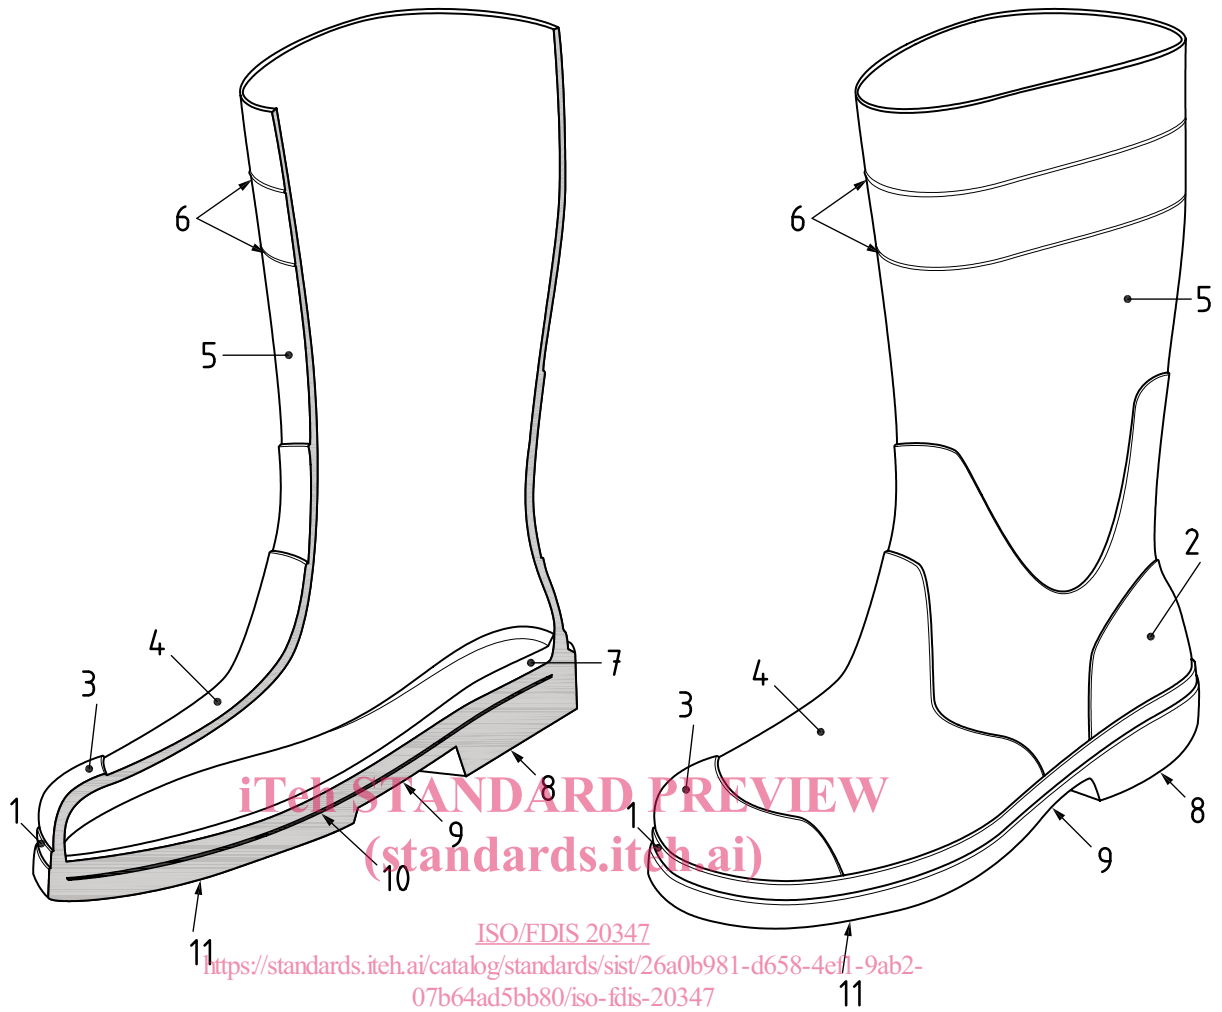


Key

- | | | | |
|---|-----------------|----|------------------------------|
| 1 | foxing strip | 7 | insock/footbed |
| 2 | upper – counter | 8 | outsole – Heel |
| 3 | scuff cap | 9 | outsole – waist |
| 4 | upper – vamp | 10 | perforation resistant insert |
| 5 | upper – shaft | 11 | outsole – forepart |
| 6 | trim marks | | |

Figure 2 — Example parts of Class II occupational footwear

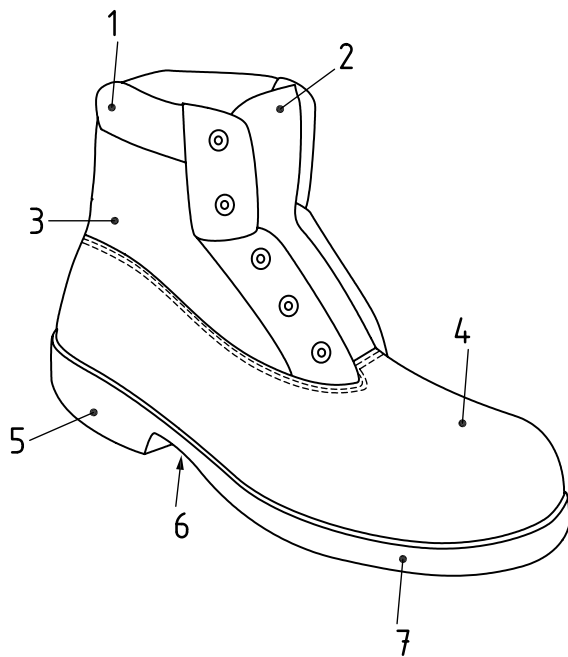

a) Example of hybrid safety footwear in general

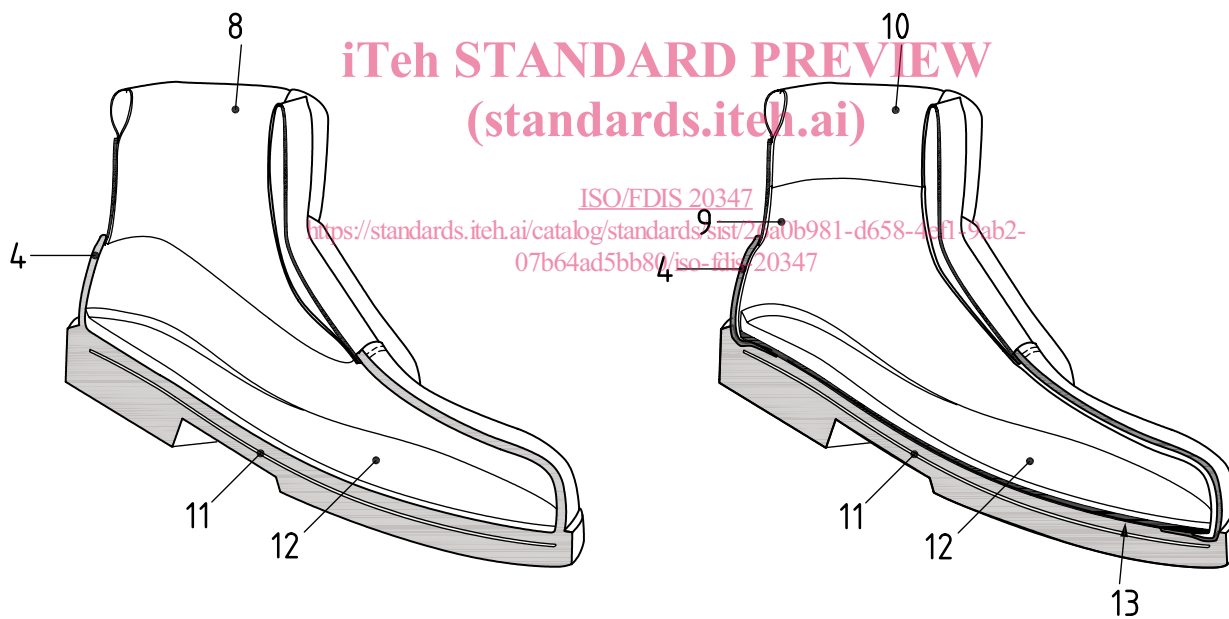

b) Hybrid moulded (Entirely moulded lower section)

c) Hybrid constructed (separately attached sole unit)

Key

- | | |
|--|---------------------------------|
| 1 collar | 8 lining |
| 2 tongue | 9 quarter lining |
| 3 upper – leather or fabric section | 10 collar lining |
| 4 upper – moulded rubber or polymeric part | 11 perforation resistant insert |
| 5 outsole – heel | 12 insock/footbed |
| 6 outsole – waist | 13 insole |
| 7 outsole – forepart | |

Figure 3 — Example parts of hybrid occupational footwear

4 Classification and designs

Occupational footwear shall be classified in accordance with [Table 1](#). Designs of footwear are illustrated in [Figure 4](#).

Table 1 — Classification of occupational footwear

Classification	Description
Class I	Footwear made from leather and other materials, excluding all-rubber or all-polymeric footwear (see Figure 1)
Class II	All-polymeric (i.e. entirely moulded) including all-rubber (i.e. entirely vulcanized) footwear (see Figure 2)
Hybrid footwear	See 3.18 (see Figure 3)



Key

× = Variable extension which can be adapted to the wearer.

NOTE Design E of class I and II occupational footwear can be a knee-height boot (design D) equipped with a thin impermeable material which extends the upper which can be cut to adapt the boot height to the wearer. This design does not constitute hybrid footwear.

Figure 4 — Example designs of occupational footwear