
**Metallic and other inorganic
coatings — Test method for the
friction coefficient measurement of
chemical conversion coatings**

*Revêtements métalliques et autres revêtements inorganiques —
Méthode d'essai pour le mesurage du coefficient de frottement des
couches de conversion chimique*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 22462:2020](https://standards.iteh.ai/catalog/standards/sist/5e83340c-15ce-4f98-9379-15e1d3e73c7c/iso-22462-2020)

<https://standards.iteh.ai/catalog/standards/sist/5e83340c-15ce-4f98-9379-15e1d3e73c7c/iso-22462-2020>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 22462:2020

<https://standards.iteh.ai/catalog/standards/sist/5e83340c-15ce-4f98-9379-15e1d3e73c7c/iso-22462-2020>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Apparatus	2
5 Test piece	3
5.1 Dimensions of the test piece	3
5.2 Preparations	3
6 Test conditions	3
6.1 General	3
6.2 Test parameters	4
7 Test procedure	4
8 Test report	5
Bibliography	7

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 22462:2020](https://standards.iteh.ai/catalog/standards/sist/5e83340c-15ce-4f98-9379-15e1d3e73c7c/iso-22462-2020)

<https://standards.iteh.ai/catalog/standards/sist/5e83340c-15ce-4f98-9379-15e1d3e73c7c/iso-22462-2020>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 107, *Metallic and other inorganic coatings*, Subcommittee SC 8, *Chemical conversion coatings*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The forming properties of sheet metals are highly dependent on the friction that is generated with the dies during the forming process.

Therefore, there is a need to measure the frictional characteristics of the surface of sheet metals.

The measured friction coefficient can change depending on the test conditions and the apparatus status. Moreover, if the apparatus has not been configured properly, it is difficult to ensure reliability and reproducibility. Many traditional methods cause deformation or breakage of the test pieces because of the pressure of the friction block (and its perpendicular pressure to the specimens). In addition, there is no International Standard for metallic coatings, other inorganic coatings and chemical conversion coatings.

This document gives an advanced method that can accurately measure the friction coefficient without deformation of the test pieces during the test.

The test results can vary depending on the test conditions, e.g. surface state, normal force, sliding velocity, temperature. Therefore, it is important that the test conditions are specified.

The International Organization for Standardization (ISO) draws attention to the fact that it is claimed that compliance with this document may involve the use of a patent related to the composition of apparatus given in [Clause 4](#).

ISO takes no position concerning the evidence, validity and scope of this patent right.

The holder of this patent right has assured ISO that he/she is willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of this patent right is registered with ISO. Information may be obtained from the patent database available at www.iso.org/patents.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those in the patent database. ISO shall not be held responsible for identifying any or all such patent rights.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 22462:2020

<https://standards.iteh.ai/catalog/standards/sist/5e83340c-15ce-4f98-9379-15e1d3e73c7c/iso-22462-2020>

Metallic and other inorganic coatings — Test method for the friction coefficient measurement of chemical conversion coatings

1 Scope

This document specifies a test method to measure the friction coefficient of chemical conversion coating sheet products and coiled products.

This document is applicable to measure or compare the friction properties of hot-dip galvanized, lubricated and resin coated steel sheet, when tested under the same conditions.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 377, *Steel and steel products — Location and preparation of samples and test pieces for mechanical testing*

ISO 27831-1, *Metallic and other inorganic coatings — Cleaning and preparation of metal surfaces — Part 1: Ferrous metals and alloys*

IEC 60648, *Method of test for coefficients of friction of plastic film and sheeting for use as electrical insulation*

<https://standards.iteh.ai/catalog/standards/sist/5e83340c-15ce-4f98-9379-15e1d3e73c7c/iso-22462-2020>

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 377, IEC 60648 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

3.1 friction

resisting force that arises when a surface of one substance slides, or tends to slide, over an adjoining surface of itself or another substance

Note 1 to entry: Between surfaces of solids in contact there may be two kinds of friction.

3.2 sliding coefficient of friction

μ_k
resistance that opposes the force required to move one surface over another at a variable, fixed or predetermined speed


3.3 test piece

part of a sample or rough specimen, with specified dimensions, machined or un-machined, brought to a required condition for submission to a given verification test

4 Apparatus

Use a sled type tester consisting of the following apparatus, as shown in [Figure 1](#).

- 4.1 **Table**, located over the sled so that the test piece can be moved in both a horizontal and vertical direction.
- 4.2 **Sled**, a device for moving the table in a horizontal direction.
- 4.3 **Clamp**, a device for fixing the test piece in a longitudinal direction.
- 4.4 **Stopper**, a device for fixing the test piece in a width direction.
- 4.5 **Test piece holder**, a place for putting the test piece.
- 4.6 **Friction block**, which is perpendicularly positioned for pressing the test piece. It has a curvature at the edge to prevent tilting when the test piece moves.
- 4.7 **Load cell**.
- 4.8 **Pressure device**, a device that gives a load perpendicular to the specimen.
- 4.9 **Horizontal driving device**, which controls the sliding speed for the friction test.
- 4.10 **Vertical driving device**, which moves the sled delivery system in a vertical direction.

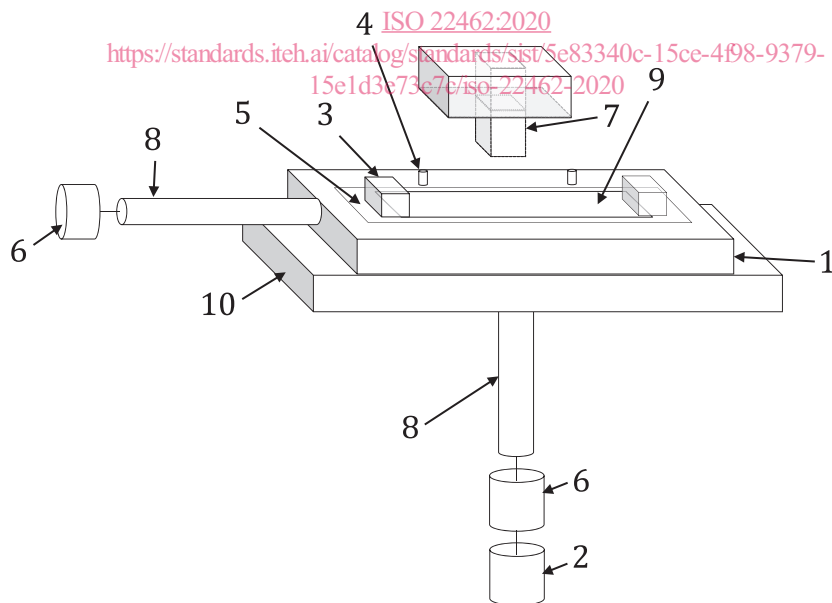

Key

- | | | | |
|---|-------------------|----|----------------|
| 1 | table | 6 | load cell |
| 2 | pressure device | 7 | friction block |
| 3 | clamp | 8 | driving device |
| 4 | stopper | 9 | test piece |
| 5 | test piece holder | 10 | sled |

Figure 1 — Apparatus


5 Test piece

5.1 Dimensions of the test piece

The test piece should be cut from the sample in a transverse or longitudinal direction. In general, the test is carried out in a transverse direction. The test direction information shall be provided.

The shape and dimensions of the test piece shall be in accordance with [Figure 2](#).

If a test piece is short, it cannot have enough travel distance to get a friction coefficient within allowable error limits during the test. A friction coefficient is changed by travel distance. The travel distance has to be specified.

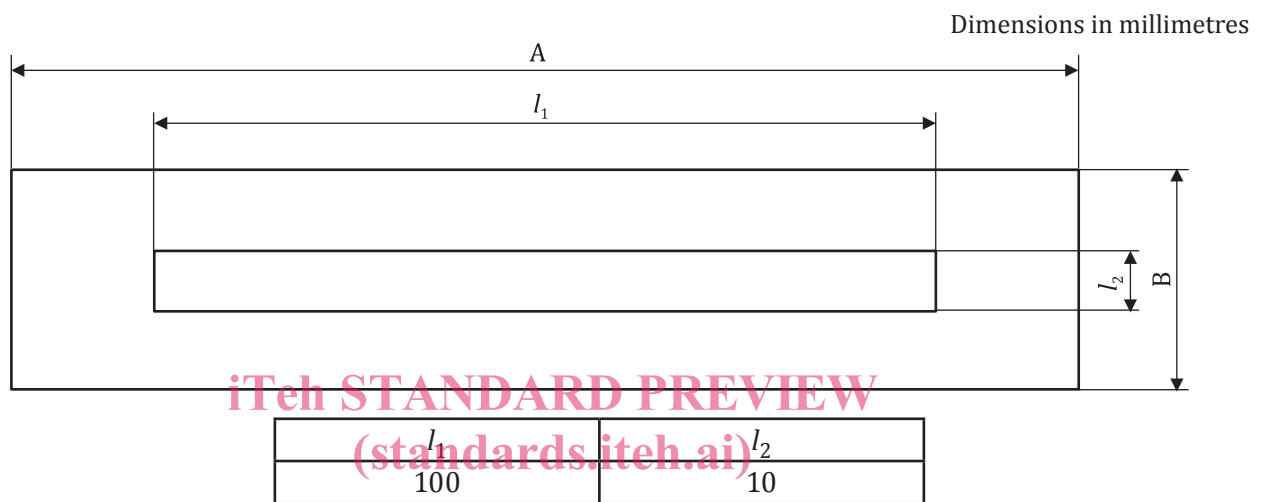

Key

- A test piece width
 B test piece length
 l_1 travel distance
 l_2 friction block width

ISO 22462:2020
<https://standards.iteh.ai/catalog/standards/sist/5e83340c-15ce-4f98-9379-15e1d3e73c7c/iso-22462-2020>

Figure 2 — Test piece

5.2 Preparations

Before testing, the test pieces shall be prepared in accordance with ISO 27831-1.

Contaminants on the surface of the test pieces shall be eliminated.

When a load is applied to the test pieces, the load shall be checked with sensitive paper to verify the uniform load. If the load isn't applied to the constant area equally, uncertainty of the test results can be increased.

6 Test conditions

6.1 General

Conduct the tests at $(23 \pm 10)^\circ\text{C}$ and $(50 \pm 10)\%$ relative humidity. Follow the temperature and humidity guidelines of the mechanical test.