

---

---

**Information technology —  
Telecommunications and information  
exchange between systems —  
Guidelines for the implementation of  
ISO/IEC 17982:2012**

*Technologies de l'information — Téléinformatique — Lignes  
directrices pour la mise en application de l'ISO/IEC 17982:2012*  
**(standards.iteh.ai)**

ISO/IEC TR 22512:2017  
<https://standards.iteh.ai/catalog/standards/sist/b4a61bef-6afc-4dd4-b9f5-56c05bf010e4/iso-iec-tr-22512-2017>



## iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/IEC TR 22512:2017

<https://standards.iteh.ai/catalog/standards/sist/b4a61bef-6afc-4dd4-b9f5-56c05bf010e4/iso-iec-tr-22512-2017>



### **COPYRIGHT PROTECTED DOCUMENT**

© ISO/IEC 2017, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
[copyright@iso.org](mailto:copyright@iso.org)  
[www.iso.org](http://www.iso.org)

# Contents

	Page
<b>Foreword</b> .....	<b>iv</b>
<b>Introduction</b> .....	<b>v</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative reference</b> .....	<b>1</b>
<b>3 Terms and definitions</b> .....	<b>1</b>
<b>4 Implementation approach</b> .....	<b>1</b>
4.1 TDS number and sequence number .....	1
4.2 CRC .....	2
4.3 Segmentation and reassembly .....	2
4.4 Random number .....	3
4.5 RFU handling standard way .....	3
4.6 RFU handling proprietary way .....	3
4.7 Collision avoidance .....	3
4.8 Identifying the P-PDUs .....	4
4.9 PHY User .....	5
<b>Bibliography</b> .....	<b>6</b>

## iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/IEC TR 22512:2017

<https://standards.iteh.ai/catalog/standards/sist/b4a61bef-6afc-4dd4-b9f5-56c05bf010e4/iso-iec-tr-22512-2017>

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 6, *Telecommunications and information exchange between systems*.

## Introduction

ISO/IEC 17982 specifies minimum requirements for interoperable CCCC PHY technology. This document provides guidance for the implementation of ISO/IEC 17982 in order to realize highly compatible CCCC PHY.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO/IEC TR 22512:2017  
<https://standards.iteh.ai/catalog/standards/sist/b4a61bef-6afc-4dd4-b9f5-56c05bf010e4/iso-iec-tr-22512-2017>

## **iTeh STANDARD PREVIEW** **(standards.iteh.ai)**

ISO/IEC TR 22512:2017

<https://standards.iteh.ai/catalog/standards/sist/b4a61bef-6afc-4dd4-b9f5-56c05bf010e4/iso-iec-tr-22512-2017>

# Information technology — Telecommunications and information exchange between systems — Guidelines for the implementation of ISO/IEC 17982:2012

## 1 Scope

This document provides guidance for the implementation of ISO/IEC 17982.

## 2 Normative reference

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 17982:2012, *Information technology — Telecommunications and information exchange between systems — Close Capacitive Coupling Communication Physical Layer (CCCC PHY)*

## 3 Terms and definitions

No terms and definitions are listed in this document. The abbreviated terms in ISO/IEC 17982 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

## 4 Implementation approach

### 4.1 TDS number and sequence number

ISO/IEC 17982:2012, 8.3 states "P-PDUs shall be transmitted byte-wise in the sequence specified in 9.1. Bytes shall be transmitted with least significant bit first.". This means that payload is transmitted as byte and the others are transmitted T by T as specified in ISO/IEC 17982:2012, Figure 6.

[Table 1](#) represents the implementation of the TDS number.

**Table 1 — TDS number**

Decimal notation	Binary notation	t <sub>12</sub>	t <sub>13</sub>	t <sub>14</sub>
1	(000)b	0	0	0
2	(001)b	1	0	0
3	(010)b	0	1	0
4	(011)b	1	1	0
5	(100)b	0	0	1
6	(101)b	1	0	1
7	(110)b	0	1	1
8	(111)b	1	1	1

Table 2 represents the implementation of the sequence number.

Table 2 — Sequence number

Decimal notation	Binary notation	t <sub>15</sub>	t <sub>16</sub>
1	(00)b	0	0
2	(01)b	1	0
3	(10)b	0	1
4	(11)b	1	1

4.2 CRC

The CRC value calculated by using the formula specified in ITU-T V.41 is set onto P-PDU so as to be transmitted with the order specified in ITU-T V.41. The corresponding bit settings of the CRC information field in a P-PDU is as follows.

t<sub>49</sub> = x<sup>15</sup>, t<sub>50</sub> = x<sup>14</sup>, t<sub>51</sub> = x<sup>13</sup>, t<sub>52</sub> = x<sup>12</sup>, t<sub>53</sub> = x<sup>11</sup>, t<sub>54</sub> = x<sup>10</sup>, t<sub>55</sub> = x<sup>9</sup>, t<sub>56</sub> = x<sup>8</sup>,

t<sub>57</sub> = x<sup>7</sup>, t<sub>58</sub> = x<sup>6</sup>, t<sub>59</sub> = x<sup>5</sup>, t<sub>60</sub> = x<sup>4</sup>, t<sub>61</sub> = x<sup>3</sup>, t<sub>62</sub> = x<sup>2</sup>, t<sub>63</sub> = x<sup>1</sup>, t<sub>64</sub> = x<sup>0</sup>

16-bit CRC is expressed in binary as (**1010101101101111**)b where the furthest left-hand number ‘1’ (underlined and bold) is the highest order bit of CRC, x<sup>15</sup>, i.e., t<sub>49</sub>=1, t<sub>50</sub>=0, t<sub>51</sub>=1, t<sub>52</sub>=0, t<sub>53</sub>=1, t<sub>54</sub>=0, t<sub>55</sub>=1, t<sub>56</sub>=1, t<sub>57</sub>=0, t<sub>58</sub>=1, t<sub>59</sub>=1, t<sub>60</sub>=0, t<sub>61</sub>=1, t<sub>62</sub>=1, t<sub>63</sub>=1, t<sub>64</sub>=1. For an example, see Figure 1.

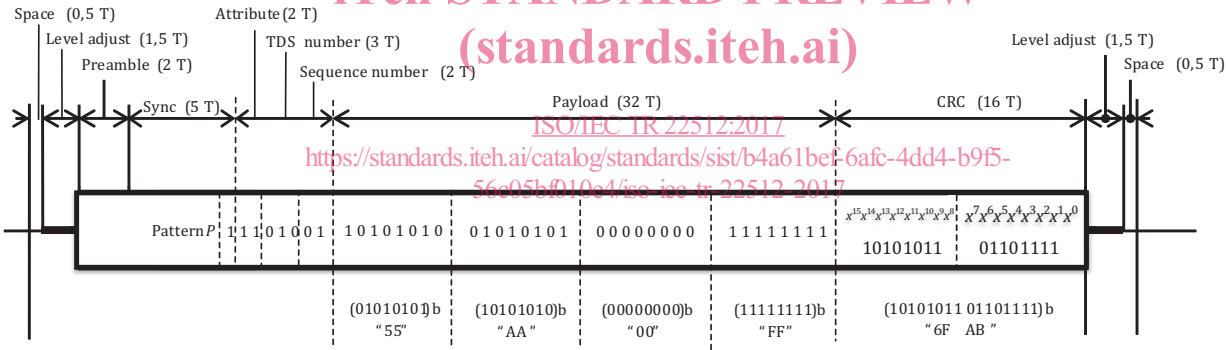


Figure 1 — Example of payload and CRC

4.3 Segmentation and reassembly

An example of segmentation and reassembly is illustrated in Figure 2.

Bit t<sub>24</sub>, t<sub>32</sub>, t<sub>40</sub>, t<sub>48</sub> are msb and t<sub>17</sub>, t<sub>25</sub>, t<sub>33</sub>, t<sub>41</sub> are lsb in Payload of P-PDU.



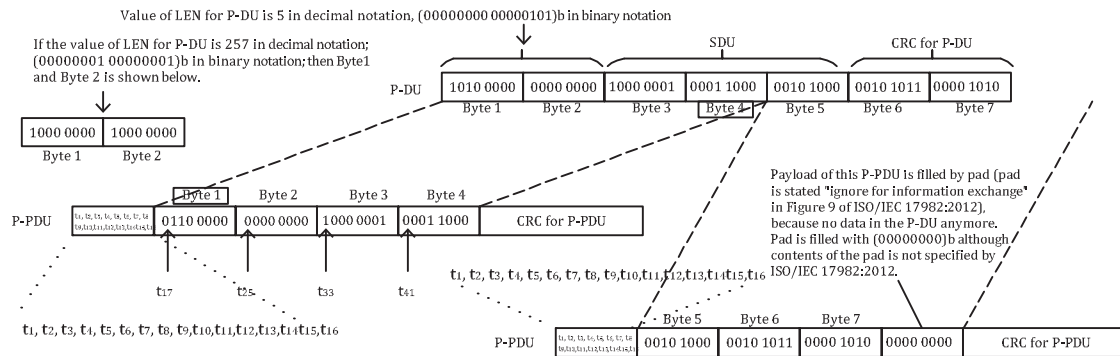


Figure 2 — Segmentation and reassembly

#### 4.4 Random number

A PHY User may generate the random number and set it into the association P-PDU instead of CCCC PHY itself.

#### 4.5 RFU handling standard way

The generic meaning of the term RFU (Reserved for Future Use) in ISO/IEC 17982 is that it is reserved for future standardized use; it does not mean it is free for proprietary use. Therefore, do not be concerned with the setting of RFU when sending because the RFU is ignored when received.

#### 4.6 RFU handling proprietary way

In general, devices and modules that are fully compatible with ISO/IEC 17982 provide decent cost, quality and availability. From this point of view, it is not a good idea for the devices and the modules to provide the proprietary features by using RFU as if it was a part of ISO/IEC 17982.

The devices and the modules may have potential flexibility in the market, since customization is necessary for the optimized application systems. Customizing the standard devices and the standard modules is a realistic solution.

Under the customized application systems, do not be concerned with the RFU setting when sending and receiving even though the individual application systems require compatibility; this is only in the system and it does not require generic compatibility with the other relation-less systems.

#### 4.7 Collision avoidance

See Figure 3. In this case, Talker-A starts sending Association Request 1 to TDS1 and both Listener-F and Listener-G receive it.

If both Listener-F and Listener-G start sending Association Response 1 on the same time-segment then collision occurs on TDS5.

If a Listener delays sending its Association Response by time-segment then the possibility of collision during Association procedure is reduced. The optimized amount of delay by time-segment(s) is dependent on the requirements of every application system. It may be either random or predesigned.