INTERNATIONAL STANDARD

ISO 3030

Fourth edition 2022-03

Rolling bearings — Radial needle roller and cage assemblies — Boundary dimensions, geometrical product specifications (GPS) and tolerance values

Roulements — Cages à aiguilles radiales — Dimensions d'encombrement, spécification géométrique des produits (GPS) et valeurs de tolérance

ISO 3030:2022



iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 3030:2022

https://standards.iteh.ai/catalog/standards/sist/600c7e05-b283-4af1-830f-1fb4de29c437/iso-3030-2022



COPYRIGHT PROTECTED DOCUMENT

© ISO 2022

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office CP 401 • Ch. de Blandonnet 8 CH-1214 Vernier, Geneva Phone: +41 22 749 01 11 Email: copyright@iso.org Website: www.iso.org

Published in Switzerland

Cor	itent	S	Page
Fore	word		iv
Intro	ductio	on	v
1	Scop	e	1
2	Norr	native references	1
3	Tern	ns and definitions	1
4	Sym	bols	1
5		ensions	
6	6.1	Tolerances for the needle roller Tolerance for the cage width	5
Anno	ex A (in	formative) Tolerances for shaft raceway, housing raceway and raceway widths	6
Anno	ex B (in	formative) Functional gauging of radial needle roller and cage assemblies	8
Bibli	ograpl	1V	10

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 3030:2022

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 4, *Rolling bearings*, Subcommittee SC 5, *Needle, cylindrical and spherical roller bearings*. $_{\rm ISO/3030/2022}$

This fourth edition cancels and replaces the third edition (ISO 3030:2011), which has been technically revised.

The main changes compared to the previous edition are as follows:

- geometrical product specifications (GPS) have been implemented;
- an informative annex on functional gauging of radial needle roller and cage assembly has been added.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

This document is a machine element geometry standard as defined in the geometrical product specification system (GPS system) presented in the matrix model of ISO $14638^{[9]}$.

The fundamental rules of ISO/GPS given in ISO 8015^[5] apply to this document and the default decision rules given in ISO 14253-1^[Z] apply to specifications made in accordance with this document, unless otherwise indicated.

The connection between functional requirements, measuring technique and measuring uncertainty is always intended to be considered. For measurement uncertainty, ISO 14253-2[8] should be considered.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 3030:2022

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 3030:2022

Rolling bearings — Radial needle roller and cage assemblies — Boundary dimensions, geometrical product specifications (GPS) and tolerance values

1 Scope

This document specifies the boundary dimensions for radial needle roller and cage assemblies.

In addition, this document gives the tolerances for the cage width and method of functional gauging of bore diameter of needle roller complement.

Informative values for the tolerances of shaft raceway, housing raceway and raceway widths are given in $\underline{\mathsf{Annex}\,\mathsf{A}}$.

Functional gauging of radial needle roller and cage assembly is given in Annex B.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1132-1, Rolling bearings — Tolerances — Part 1: Terms and definitions

ISO 3096, Rolling bearings — Needle rollers — Boundary dimensions, geometrical product specifications (GPS) and tolerance values

ISO 5593, Rolling bearings — Vocabulary 3030-20

ISO 14405-1, Geometrical product specifications (GPS) — Dimensional tolerancing — Part 1: Linear sizes

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 1132-1, ISO 5593 and ISO 14405-1 apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at https://www.iso.org/obp
- IEC Electropedia: available at https://www.electropedia.org/

4 Symbols

To express that the ISO/GPS system, ISO 8015^[5], is applied, the dimensional and geometrical characteristics shall be included in the technical product documentation (e.g. on the drawing).

The dimensional and geometrical specifications associated to these characteristics are described in Table 1 and Figure 1.

Descriptions for symbols are in accordance with GPS terminology.

A tolerance value associated to a characteristic is symbolised by t followed by the symbol for the characteristic, in subscript, for example, $t_{\Delta Bcs}$.


In this document, the ISO default specification operator for size is in accordance with ISO 14405-1.

Table 1 — Symbols for nominal sizes, characteristics and specification modifiers

Symbol for nominal size ^a	Symbol for characteristic ^a	GPS symbol and specification modifier ^b	Description ^c
$B_{\rm c}$			nominal cage width
	$\it \Delta_{ m Bcs}$	(GN)	deviation of minimum circum- scribed size of cage width from its nominal size
$E_{\rm w}$			nominal circumscribed diameter of needle roller complement
$F_{\rm w}$			nominal inscribed diameter of needle roller complement

Symbols as defined in ISO 15241^[10] except for the format used.

Description based on ISO 14405-1.

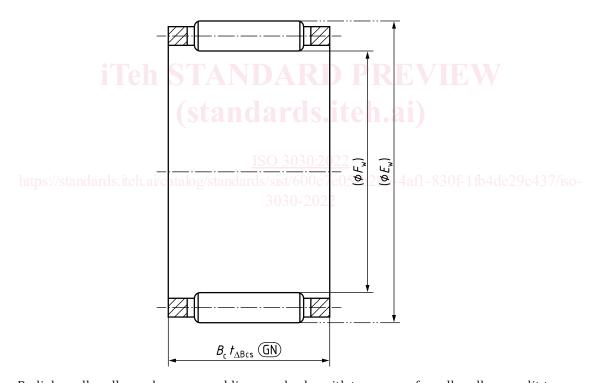

NOTE Radial needle roller and cage assemblies can also be with two rows of needle roller or split-type.

Figure 1 — Radial needle roller and cage assembly

Symbols as defined in ISO 14405-1.

5 Dimensions

The general plan of nominal boundary dimensions of needle roller and cage assemblies is given in $\underline{\text{Tables 2}}$ and $\underline{3}$.

Table 2 — Diameter series 1C and 2C

Dimensions in millimetres

			D	iameter	series 1	1C			Diameter series 2C										
F					ension se								ension s						
$F_{\rm w}$	E_{w}				$B_{\rm c}$		1	1	E_{w}			1	$B_{\rm c}$	1		.			
		11C	21C	31C	41C	51C	61C	71C		12C	22C	32C	42C	52C	62C	72C			
4	7	6	8	10		_	_	_	_	_	_	_	_	_	_	_			
5	8	6	8	10	13	_	_	_	9	8	10	13	_	_	_	_			
6	9	6	8	10	13	15	_	_	10	8	10	13	15	_	_	_			
7	10	6	8	10	13	15	17	_	11	8	10	13	15	17	_	_			
8	11	6	8	10	13	15	17	_	12	8	10	13	15	17	20	_			
9	12	6	8	10	13	15	17	_	13	8	10	13	15	17	20	_			
10	13	6	8	10	13	15	17	_	14	8	10	13	15	17	20	_			
12	15	6	8	10	13	15	17	_	16	8	10	13	15	17	20	_			
14	18	8	10	13	15	17	20	23	19	10	13	15	17	20	23	27			
15	19	8	10	13	15	17	20	23	20	10	13	15	17	20	23	27			
16	20	8	10	13	15	17	20	23	21	10	13	15	17	20	23	27			
17	21	8	10	13	15	17	20	23	22	10	13	15	17	20	23	27			
18	22	8	10	13	15	17	20	23	23	10	13	15	17	20	23	27			
20	24	8	10	13	15	17	20	23	25	10	13	15	17	20	23	27			
22	26	8	10	13	15	17	20	23	27	10	13	15	17	20	23	27			
25	29	8	10	13	15	17	20	23	30	10	13	15	17	20	23	27			
28)S 33St2	11010	S.1 ₁₃ 1.8	1/95tal	0g ₁₇ ta1	2008	S123	1027 el	3428	3 12 al	15	17	e ₂₀ c	25 180	- 30	35			
30	35	10	13	15	17	20	3 (23) -	20272	36	12	15	17	20	25	30	35			
32	37	10	13	15	17	20	23	27	38	12	15	17	20	25	30	35			
35	40	10	13	15	17	20	23	27	41	12	15	17	20	25	30	35			
38	43	10	13	15	17	20	23	27	44	12	15	17	20	25	30	35			
40	45	10	13	15	17	20	23	27	46	12	15	17	20	25	30	35			
42	47	10	13	15	17	20	23	27	48	12	15	17	20	25	30	35			
45	50	10	13	15	17	20	23	27	51	12	15	17	20	25	30	35			
50	55	10	13	15	17	20	23	27	56	12	15	17	20	25	30	35			
55	61	12	15	17	20	25	30	35	62	16	20	25	30	35	40	_			
60	66	12	15	17	20	25	30	35	67	16	20	25	30	35	40	_			
65	71	12	15	17	20	25	30	35	72	16	20	25	30	35	40	_			
70	76	12	15	17	20	25	30	35	77	16	20	25	30	35	40	_			
75	81	12	15	17	20	25	30	35	82	16	20	25	30	35	40	_			
80	86	12	15	17	20	25	30	35	87	16	20	25	30	35	40	_			
85	92	16	20	25	30	35	40	_	93	20	25	30	35	40	45	_			
90	97	16	20	25	30	35	40	_	98	20	25	30	35	40	45	_			
95	102	16	20	25	30	35	40	_	103	20	25	30	35	40	45	_			
100	107	16	20	25	30	35	40	_	108	20	25	30	35	40	45	_			

Table 3 — Diameter series 3C, 4C and 5C

Dimensions in millimetres

	Diameter series 3C									Diameter series 4C								Diameter series 5C					
				imensi					Dimension series							ı		on seri	es				
$F_{\rm w}$	E_{w}				3 _c			$E_{\rm w}$				3 _c			$E_{\rm w}$	_	$B_{\rm c}$						
		13C	23C	33C	43C	53C	63C		14C	24C	34C	44C	54C	64C		15C	25C	35C	45C				
6	11	10	13	15	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_				
7	12	10	13	15	17		_				_		_			_							
8	13	10	13	15	17	20	_	14	12	15	17	20	_				_						
9	14	10	13	15	17	20	_	15	12	15	17	20	_				_	_					
10	15	10	13	15	17	20	_	16	12	15	17	20	_	_	17	16	20	25					
12	17	10	13	15	17	20	23	18	12	15	17	20	_	_	19	16	20	25					
14	20	12	15	17	20	25	30	21	16	20	25	30	35	_	22	20	25	30					
15	21	12	15	17	20	25	30	22	16	20	25	30	35	_	23	20	25	30	_				
16	22	12	15	17	20	25	30	23	16	20	25	30	35	_	24	20	25	30	35				
17	23	12	15	17	20	25	30	24	16	20	25	30	35	_	25	20	25	30	35				
18	24	12	15	17	20	25	30	25	16	20	25	30	35	40	26	20	25	30	35				
20	26	12	15	17	20	25	30	27	16	20	25	30	35	40	28	20	25	30	35				
22	28	12	15	17	20	25	30	29	16	20	25	30	35	40	30	20	25	30	35				
25	31	12	15	17	20	25	30	32	16	20	25	30	35	40	33	20	25	30	35				
28	35	16	20	25	30	35	40	36	20	25	30	35	40	45	38	25	30	35	40				
30	37	16	20	25	30	35	40 4	38	20	25	30	35	40	45	40	25	30	35	40				
32	39	16	20	25	30	35	40	40	20	25	30	35	40	45	42	25	30	35	40				
35	42	16	20	25	30	35	40	43	20	_25	30	35_	40	45	45	25	30	35	40				
38	45	16	20	25	30	35	40	46	20	25	30	35	40	45	48	25	30	35	40				
40	47	16	20	25	30	35	40	48	20	25	30	2 35	40	45	50	25	30	35	40				
42	49	16	20	25	30	35	40	50	20	25	30	35	40 ₄	45	3 52	25	30	335	40				
45	52	16	20	25	30	35	40	53	203	25	30	35	40	45	55	25	30	35	40				
50	57	16	20	25	30	35	40	58	20	25	30	35	40	45	60	25	30	35	40				
55	63	20	25	30	35	40	45	65	25	30	35	40	45	50	70	35	40	45	50				
60	68	20	25	30	35	40	45	70	25	30	35	40	45	50	75	35	40	45	50				
65	73	20	25	30	35	40	45	75	25	30	35	40	45	50	80	35	40	45	50				
70	78	20	25	30	35	40	45	80	25	30	35	40	45	50	85	35	40	45	50				
75	83	20	25	30	35	40	45	85	25	30	35	40	45	50	90	35	40	45	50				
80	88	20	25	30	35	40	45	90	25	30	35	40	45	50	95	35	40	45	50				
85	95	25	30	35	40	45	50	100	35	40	45	50	60	_	105	45	50	60	70				
90	100	25	30	35	40	45	50	105	35	40	45	50	60	_	110	45	50	60	70				
95	105	25	30	35	40	45	50	110	35	40	45	50	60	_	115	45	50	60	70				
100	110	25	30	35	40	45	50	115	35	40	45	50	60	_	120	45	50	60	70				