
**Space systems — Space-based services
for a high accuracy positioning system
with safety requirements**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/PRE TS 22591](https://standards.iteh.ai/catalog/standards/sist/a74a0745-0a57-4e8d-9400-47b15071e2fa/iso-prf-ts-22591)

<https://standards.iteh.ai/catalog/standards/sist/a74a0745-0a57-4e8d-9400-47b15071e2fa/iso-prf-ts-22591>

PROOF / ÉPREUVE



Reference number
ISO/TS 22591:2021(E)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/PRE TS 22591

<https://standards.iteh.ai/catalog/standards/sist/a74a0745-0a57-4e8d-9400-47b15071e2fa/iso-prf-ts-22591>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Abbreviated terms	3
5 Service system and risks	3
5.1 Service system.....	3
5.2 Risks.....	4
6 Rover safety requirements	4
6.1 General.....	4
6.2 Usage of accurate map data (safety provision 1).....	4
6.3 Indication of positioning quality (safety provision 2).....	4
6.4 Collision avoidance to the obstacles on the course (safety provision 3).....	5
6.5 Dropping avoidance from the course edge (safety provision 4).....	5
6.6 Damaging avoidance through the work (safety provision 5).....	5
6.7 Collision avoidance to other vehicles or pedestrians (safety provision 6).....	5
6.8 Positioning supplement in GNSS unavailable area (safety provision 7).....	5
7 System specifications	5
7.1 General.....	5
7.2 Requirements of usage of high accuracy map.....	6
7.2.1 Accuracy of map data.....	6
7.2.2 Human machine interface.....	6
7.2.3 Maintenance of map data.....	7
7.3 Requirements of high accuracy positioning.....	7
7.3.1 Positioning accuracy.....	7
7.3.2 Positioning method.....	8
7.3.3 Reception of augmentation data.....	8
7.3.4 Positioning quality (safety provision 2).....	8
7.3.5 Usage of integrated positioning (safety provision 7).....	8
7.3.6 Real-time property.....	8
7.3.7 Improvement of availability.....	9
8 Verification	9
8.1 Verification of highly accurate map.....	9
8.1.1 Accuracy of map data.....	9
8.1.2 Human machine interface.....	9
8.1.3 Maintenance of map data.....	9
8.2 Verification of highly accurate positioning.....	10
8.2.1 Positioning accuracy.....	10
8.2.2 Positioning method.....	11
8.2.3 Reception of augmentation data.....	11
8.2.4 Positioning quality.....	11
8.2.5 Usage of integrated positioning.....	11
8.2.6 Real-time property.....	11
Annex A (Informative) Examples of application	12
Annex B (Informative) Mobile mapping system	18
Annex C (Informative) Augmented GNSS positioning	19
Annex D (Informative) Space-based precise augmentation with fast convergence	20
Bibliography	21

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 14, *Space systems and operations*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

This document is a technical specification of space-based services. Space systems provide a huge merit for the society and economy in each country today; and space-based services contribute to people's quality of life across the world. Space systems should be utilized furthermore in the industry worldwide in the future.

Space systems are utilized in the application of other areas. Therefore, this document has harmonized the content in the GNSS (global navigation satellite system) relevant area as shown in [Figure 1](#).

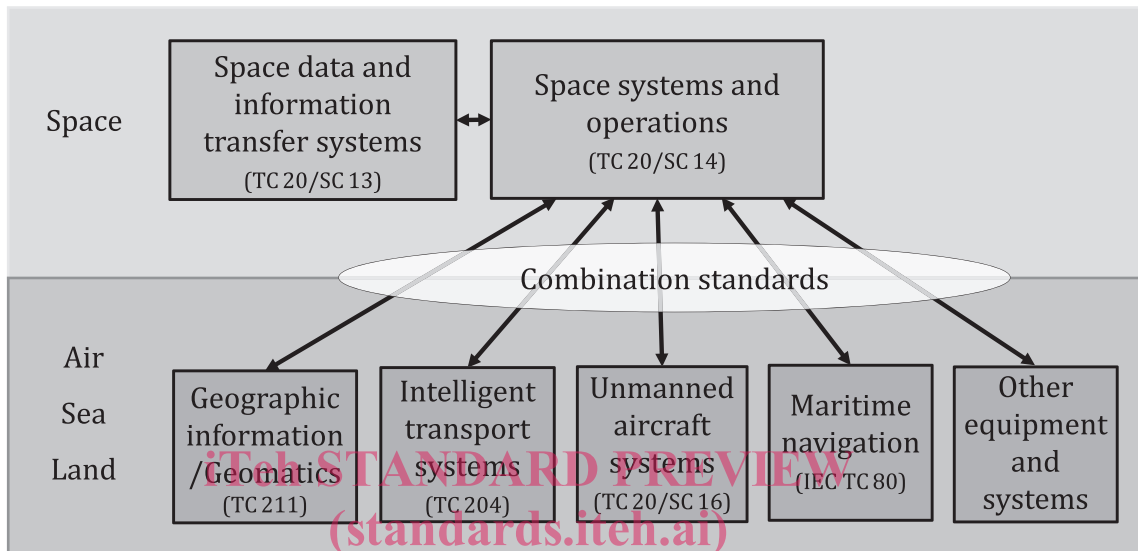


Figure 1 — Standardization of space-based services: GNSS relevant area

<https://standards.iteh.ai/catalog/standards/sist/a74a0745-0a57-4e8d-9400-47b15071e2fa/iso-prf-ts-22591>

Space systems often become the last hope for people in harsh weather conditions to ensure the safety of life. This document is intended to ensure the safety with the power of space systems.

The operation of moving machines under such harsh conditions is difficult and unsafe for machine operators. For example, snow removal work with a snowplough is very difficult and unsafe for non-skilled workers. It is necessary to have experience and skills to operate the vehicle near the edges and features of a course. Because it takes a long period of training time to learn the operation skills for manoeuvring a work vehicle, it is becoming a serious problem in areas with heavy snow to secure the highly skilled workers who operate these vehicles and to maintain a continuous plan for subsequent replacement due to the retirement of skilled workers.

The purpose of this document is to mainly determine the safety requirements for a space-based high accuracy positioning system by which vehicles can be operated safely even in low visibility conditions with less experienced operators having minimum experience and skills.

This document refers to some general systems such as agricultural machines, road cleaning machines or construction machines which require positioning accuracy. It applies to general works such as staying the course, docking, and unloading works.

In general, it is difficult and dangerous to operate machines in low visibility due to harsh optical conditions. In such situations, the machine's positioning system requires a high degree of accuracy. This document considers the following two distinctive features commonly observed in the high accuracy positioning applications requiring safety.

- Generally speaking, a rover needs to be operated in situations where image sensors (cameras or LiDARs or both) cannot be used and the risk of accidents becomes higher.

- In addition, a machine needs to be operated in close proximity to various kinds of obstacles such as signals, signs and guide-rails on boundary lines because of its purpose. This is the main reason for the necessity of having skilled operators.

Ultimately, this document aims to help system design by which a rover can be operated safely even in low visibility situations with less experienced operators to contribute to improving the quality of life through the space-based service.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/PRE TS 22591](https://standards.iteh.ai/catalog/standards/sist/a74a0745-0a57-4e8d-9400-47b15071e2fa/iso-prf-ts-22591)

<https://standards.iteh.ai/catalog/standards/sist/a74a0745-0a57-4e8d-9400-47b15071e2fa/iso-prf-ts-22591>

Space systems — Space-based services for a high accuracy positioning system with safety requirements

1 Scope

This document provides requirements and recommendation for space-based systems that, using satellite radionavigation services, provide high accuracy positioning of rovers. It is particularly intended for rovers whose operation requires meeting specific safety requirements, including in situations of low visibility. This document also provides methods to verify the system requirements, as well as complementary information on particular applications ([Annex A](#)), mobile mapping systems ([Annex B](#)) and augmented positioning ([Annexes C and D](#)).

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 18197:2015, *Space systems — Space based services requirements for centimetre class positioning*

3 Terms and definitions (standards.iteh.ai)

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

3.1

satellite radionavigation

satellite radiodetermination (3.2) used for *radionavigation* (3.3)

[SOURCE: IEC 60050-725:1994, 725-12-51]

3.2

satellite radiodetermination

radiodetermination (3.4) which makes use of a satellite system

[SOURCE: IEC 60050-725:1994, 725-12-49]

3.3

radionavigation

radiodetermination (3.4) used for the purpose of navigation, including obstruction warning

[SOURCE: IEC 60050-725:1994, 725-12-50]

3.4

radiodetermination

determination of the position, velocity and/or other characteristics of an object, or the obtaining of information relating to these characteristics, by means of radio waves

[SOURCE: IEC 60050-725:1994, 725-12-48]

**3.5
safety**

state where an acceptable level of *risk* (3.6) is not exceeded

Note 1 to entry: Risk relates to:

- fatality,
- injury or occupational illness,
- damage to hardware or facilities,
- damage to an element of an interfacing manned system,
- the main functions of a system itself,
- pollution of the environment, atmosphere or outer space, and
- damage to public or private property.

[SOURCE: ISO 10795:2019, 3.210, modified — Note 1 to entry has been generalized for activities on planets or moons.]

**3.6
risk**

undesirable situation or circumstance that has both a likelihood of occurring and a potentially negative consequence on a project

Note 1 to entry: Risks arise from uncertainty due to a lack of predictability or control of events. Risks are inherent to any project and can arise at any time during the project life cycle; reducing these uncertainties reduces the risk.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SOURCE: ISO 17666:2016, 3.1.12]

[ISO/PRF TS 22591](https://standards.iteh.ai/catalog/standards/sist/a74a0745-0a57-4e8d-9400-47b15071e2fa/iso-prf-ts-22591)

<https://standards.iteh.ai/catalog/standards/sist/a74a0745-0a57-4e8d-9400-47b15071e2fa/iso-prf-ts-22591>

**3.7
accuracy**

closeness of agreement between a test result or measurement result and the true value

Note 1 to entry: In practice, the accepted reference value is substituted for the true value.

Note 2 to entry: The term “accuracy”, when applied to a set of test or measurement results, involves a combination of random components and a common systematic error or bias component.

Note 3 to entry: Accuracy refers to a combination of bias and precision.

[SOURCE: ISO 3534-2:2006, 3.3.1, modified — In note 3 to entry, “trueness” has been changed to “bias”.]

**3.8
integrity**

measure of the trust that can be placed in the correctness of the information supplied by a navigation system and that includes the ability of the system to provide timely warnings to users when the system should not be used for navigation

[SOURCE: 2019 Federal Radionavigation Plan, DOT-VNTSC-OST-R-15-01, A.1.10]

**3.9
dead reckoning**

method to obtain a vehicle position by using a compass or inertial measurement or both, and which can be connected with vehicle sensors which record a forward distance and steering direction

3.10**integrated positioning**

positioning incorporating two or more positioning technologies

[SOURCE: ISO 19116:2019, 3.14, modified — "system" has been removed from the term and the definition; note 1 to entry has been removed.]

3.11**mountainous district**

district where necessary satellites are not visible for positioning regularly due to being blocked by mountains

4 Abbreviated terms

DGNSS	differential GNSS
GNSS	global navigation satellite system
HDOP	horizontal dilution of precision
IMU	inertial measurement unit
LiDAR	light detection and ranging
MMS	mobile mapping system
RFID	radio frequency identification
RMS	root mean square

ITEH STANDARD PREVIEW
(standards.iteh.ai)

[ISO/PRF TS 22591](https://standards.iteh.ai/catalog/standards/sist/a74a0745-0a57-4e8d-9400-47b15071e2fa/iso-prf-ts-22591)

[https://standards.iteh.ai/catalog/standards/sist/a74a0745-0a57-4e8d-9400-](https://standards.iteh.ai/catalog/standards/sist/a74a0745-0a57-4e8d-9400-47b15071e2fa/iso-prf-ts-22591)

5 Service system and risks**5.1 Service system**

The high accuracy positioning system for rovers is intended to serve general works such as staying the course, docking, and unloading, as illustrated in [Figure 2](#).

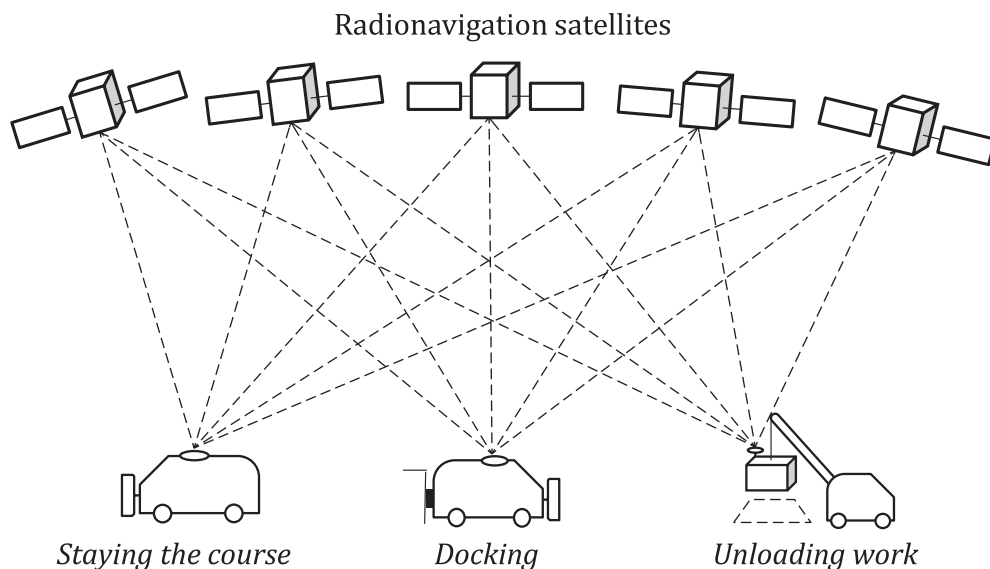


Figure 2 — System overview: work examples

To establish this service system, it is necessary to clarify the target of the rover works. In this document, the works have been classified into 4 categories by target works and object sizes as shown in [Table 1](#). The service system varies depending on the category of the target work. The object size is the size that should be recognized by a precise positioning rover to execute the target work.

Table 1 — Categorization and target work

Work category	Example of target work	Guide of object size in RMS
1	<ul style="list-style-type: none"> — Keep course edge or side line clear from dirt or snow — Keep docking position between the vehicle and the supply station such as power, fuel 	0,1 m to 0,25 m
2	<ul style="list-style-type: none"> — Keep side strip or side path clear 	0,25 m to 0,5 m
3	<ul style="list-style-type: none"> — Keep course width or flatness roughly — Spread usable area of intersection 	0,5 m to 1 m
4	<ul style="list-style-type: none"> — Stay along the wide course — Keep landing area 	Over 1 m

ISO 18197 applies to the work category 1. ISO 18197:2015, 5.4.1 also specifies metre class positioning, which applies to the work categories 2 to 4.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

5.2 Risks

The following risks are inherent to a rover making use of the high-accuracy positioning system:

- a) collision to obstacles; <https://standards.iteh.ai/catalog/standards/sist/a74a0745-0a57-4e8d-9400-47b15071e2fa/iso-prf-ts-22591>
- b) dropping from course edge;
- c) damage through the works;
- d) collision to other vehicles.

In order to manage these risks, [Clause 6](#) specifies safety requirements.

6 Rover safety requirements

6.1 General

In order to establish general principles for a high accuracy positioning of rovers, it is important to clarify the related rover safety requirements and recommendations. Seven rover safety provisions are identified in [6.2](#) to [6.8](#). Depending on which safety provisions need be met, the positioning system can vary. The specific system specifications and their verification are covered in the subsequent subclauses as specified in [Table 2](#).

6.2 Usage of accurate map data (safety provision 1)

The high accuracy positioning rover shall use the accurate map data.

6.3 Indication of positioning quality (safety provision 2)

The high accuracy positioning rover shall check the positioning quality and shall be operated depending on the quality indication.

6.4 Collision avoidance to the obstacles on the course (safety provision 3)

The high accuracy positioning rover should give the alarm depending on the relative distance between the feature and the obstacles on the map.

6.5 Dropping avoidance from the course edge (safety provision 4)

The high accuracy positioning rover should give the alarm depending on the relative distance between the vehicle and the road edge on the map.

6.6 Damaging avoidance through the work (safety provision 5)

The high accuracy positioning rover should give the alarm by recognizing restricted area of work (e.g. snow-throwing).

6.7 Collision avoidance to other vehicles or pedestrians (safety provision 6)

The high accuracy positioning rover should give the alarm depending on the relative distance between the other vehicles or pedestrians by using proximity sensors.

6.8 Positioning supplement in GNSS unavailable area (safety provision 7)

The high accuracy positioning rover shall supplement the positioning by using supplemental sensors or V2V/V2X (vehicle to vehicle/vehicle to X) communications or both when GNSS signals and/or GNSS augmentation data are not available, for example in a mountainous district.

Table 2 — System specification and verification for safety

Safety provision	System specification	Verification	Provision level
1. Usage of accurate map data	7.2.1 Accuracy of map data	8.1.1 Verification of accuracy of map data	Requirement
2. Indication of positioning quality	7.3.4 Positioning quality	8.2.4 Verification of positioning quality	Requirement
3. Collision avoidance to the obstacles on the course	7.2.2 Human machine interface	-	Recommendation
4. Dropping avoidance from the course edge	7.2.2 Human machine interface	-	Recommendation
5. Damaging avoidance by discharge	7.2.2 Human machine interface	-	Recommendation
6. Collision avoidance to the other vehicle or pedestrians	7.2.2 Human machine interface	-	Recommendation
7. Positioning supplement in GNSS unavailable area	7.3.5 Usage of integrated positioning	8.2.5 Verification of usage of integrated positioning	Requirement

7 System specifications

7.1 General

The following system specifications are derived from the safety provisions:

- usage of highly accurate map;
- high accuracy positioning.