

SLOVENSKI STANDARD

SIST EN IEC 60286-2:2023

01-marec-2023

Nadomešča:
SIST EN 60286-2:2015

Pakiranje komponent za samodejno obdelavo - 2. del: Trakanje komponent z enostranskimi izvodi na neprekinjene trakove (IEC 60286-2:2022)

Packaging of components for automatic handling - Part 2: Tape packaging of components with unidirectional leads on continuous tapes (IEC 60286-2:2022)

Gurtung und Magazinierung von Bauelementen für automatische Verarbeitung – Teil 2: Gurtung von Bauelementen mit einseitig herausgeführten Anschlussdrähten (IEC 60286-2:2022)

<https://standards.iteh.ai/catalog/standards/sist/f76998a9-cdb1-408e-8b3a-19b0c371251f/iec-60286-2:2022>

Emballage de composants pour opérations automatisées - Partie 2: Emballage des composants à sorties unilatérales en bandes continues (IEC 60286-2:2022)

Ta slovenski standard je istoveten z: EN IEC 60286-2:2022

ICS:

31.020	Elektronske komponente na splošno	Electronic components in general
55.020	Pakiranje in distribucija blaga na splošno	Packaging and distribution of goods in general

SIST EN IEC 60286-2:2023

en

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN IEC 60286-2

December 2022

ICS 31.020; 31.240

Supersedes EN 60286-2:2015

English Version

**Packaging of components for automatic handling - Part 2: Tape
packaging of components with unidirectional leads on
continuous tapes
(IEC 60286-2:2022)**

Emballage de composants pour opérations automatisées -
Partie 2: Emballage des composants à sorties unilatérales
en bandes continues
(IEC 60286-2:2022)

Gurtung und Magazinierung von Bauelementen für
automatische Verarbeitung - Teil 2: Gurtung von
Bauelementen mit einseitig herausgeführten
Anschlussdrähten
(IEC 60286-2:2022)

This European Standard was approved by CENELEC on 2022-12-20. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and the United Kingdom.



European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

EN IEC 60286-2:2022 (E)**European foreword**

The text of document 40/2974/FDIS, future edition 5 of IEC 60286-2, prepared by IEC/TC 40 "Capacitors and resistors for electronic equipment" was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN IEC 60286-2:2022.

The following dates are fixed:

- latest date by which the document has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2023-09-20
- latest date by which the national standards conflicting with the document have to be withdrawn (dow) 2025-12-20

This document supersedes EN 60286-2:2015 and all of its amendments and corrigenda (if any).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.

Any feedback and questions on this document should be directed to the users' national committee. A complete listing of these bodies can be found on the CENELEC website.

iTeh STANDARD PREVIEW
Endorsement notice
(standards.itih.ai)

The text of the International Standard IEC 60286-2:2022 was approved by CENELEC as a European Standard without any modification.

In the official version, for Bibliography, the following notes have to be added for the standard indicated:

IEC 60301 NOTE Harmonized as EN 60301

IEC 60717 NOTE Harmonized as EN 60717

ISO 11468 NOTE Harmonized as EN ISO 11468



IEC 60286-2

Edition 5.0 2022-11

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Packaging of components for automatic handling –
Part 2: Tape packaging of components with unidirectional leads on continuous
tapes**

**Emballage de composants pour opérations automatisées –
Partie 2: Emballage des composants à sorties unilatérales en bandes continues**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 31.020; 31.240

ISBN 978-2-8322-6029-6

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD	4
1 Scope	6
2 Normative references	6
3 Terms and definitions	6
4 Dimensions and specific requirements	7
4.1 General	7
4.2 Coordinate system	7
4.3 Lead taping dimensions	8
4.4 Specific requirements to components and sprocket hole pitches (P , P_0 , P_1 , P_2 , D_0)	11
4.5 Specific requirements to leads	12
4.5.1 General	12
4.5.2 Lead diameter (d , d_1)	12
4.5.3 Lead spacing (F , F_1 , F_2)	12
4.6 Specific requirements to component position in taping (Δh , Δp , ΔP_1)	12
4.7 Specific requirements to components with unguided leads	12
4.7.1 Distance between the abscissa and tip of unguided lead (H_2)	12
4.7.2 Distance between the bottom of the component and the tip of the unguided lead (H_3)	13
4.7.3 Distance between the lead terminal and the unguided lead (K)	13
5 Requirements to taping	13
5.1 Taping dimensions	13
5.2 Polarity and orientation requirements of components on tape	13
5.3 Adhesion to tape and extraction force for components	14
5.4 Splices	14
5.5 Tape leader and trailer	14
6 Requirements to tape material	15
6.1 Tape breaking force	15
6.2 Tape material	15
6.3 Hold-down tape	15
7 Packing	16
7.1 General	16
7.2 Reel dimensions	16
7.2.1 General	16
7.2.2 Component tape reeling	17
7.2.3 Component protection	17
7.2.4 Reel filling	17
7.3 Maximum dimensions of the fan-fold container	17
7.4 Missing components	18
7.5 Marking	20
8 Recycling	20
Annex A (normative) Dimensions for two leads	21
A.1 Dimensions for two formed leads, sprocket hole between parts	21
A.2 Dimensions for two formed leads, sprocket hole between leads	23
A.3 Dimensions for two straight leads, sprocket hole between parts	25

A.4	Dimensions for two straight leads, sprocket hole between leads	27
Annex B (normative)	Dimensions for three leads.....	30
B.1	Dimensions for three formed leads, sprocket hole between parts	30
B.2	Dimensions for three formed leads, sprocket hole between leads.....	32
Bibliography	35
Figure 1	– Abscissa, ordinate, reference plane and seating plane	8
Figure 2	– Crimped or otherwise formed leads	8
Figure 3	– Lead taping dimensions (straight leads)	8
Figure 4	– Lead taping dimensions (crimped leads)	9
Figure 5	– Lead taping dimensions – unguided leads	9
Figure 6	– Front-to-back and lateral deviations	10
Figure 7	– Position of short terminal without tape.....	13
Figure 8	– Pull strength (extraction from taping).....	14
Figure 9	– Leader and trailer of tape	15
Figure 10	– Symbols for reel dimensions	16
Figure 11	– Reeling	17
Figure 12	– Symbols for fan-fold container dimensions	18
Figure 13	– Missing components.....	19
Figure A.1	– Symbol references for two formed leads, sprocket hole between parts.....	22
Figure A.2	– Symbol references for two formed leads, sprocket hole between leads	24
Figure A.3	– Symbol references for two straight leads, sprocket hole between parts	26
Figure A.4	– Symbol references for two straight leads, sprocket hole between leads	28
Figure B.1	– Symbol references for three formed leads, sprocket hole between parts	31
Figure B.2	– Symbol references for three formed leads, sprocket hole between leads.....	33
Table 1	– Lead taping dimensions.....	10
Table 2	– Reel dimensions.....	16
Table 3	– Maximum outer dimensions for a fan-fold container	18
Table A.1	– Dimensions for two formed leads, sprocket hole between parts	23
Table A.2	– Dimensions for two formed leads, sprocket hole between leads	25
Table A.3	– Dimensions for two straight leads, sprocket hole between parts	27
Table A.4	– Dimensions for two straight leads, sprocket hole between leads	29
Table B.1	– Dimensions for three formed leads, sprocket hole between parts	32
Table B.2	– Dimensions for three formed leads, sprocket hole between leads.....	34

INTERNATIONAL ELECTROTECHNICAL COMMISSION

PACKAGING OF COMPONENTS FOR AUTOMATIC HANDLING –**Part 2: Tape packaging of components with
unidirectional leads on continuous tapes****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 60286-2 has been prepared by IEC technical committee 40: Capacitors and resistors for electronic equipment. It is an International Standard.

This fifth edition cancels and replaces the fourth edition published in 2015. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) complete revision of structure;
- b) consolidation of essential parameters and requirements in Clause 4.

The text of this International Standard is based on the following documents:

Draft	Report on voting
40/2974/FDIS	40/2996/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

A list of all parts in the IEC 60286 series, published under the general title *Packaging of components for automatic handling*, can be found on the IEC website.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

STANDARD PREVIEW
(standards.iteh.ai)

SIST EN IEC 60286-2:2023

<https://standards.iteh.ai/catalog/standards/sist/f76998a9-cdb1-408e-8b3a-c374b0cd3728/sist-en-iec-60286-2-2023>

PACKAGING OF COMPONENTS FOR AUTOMATIC HANDLING –

Part 2: Tape packaging of components with unidirectional leads on continuous tapes

1 Scope

This part of IEC 60286 applies to the tape packaging of components with two or more unidirectional leads for use in electronic equipment. It provides dimensions and tolerances necessary to tape components with unidirectional leads. In general, the tape is applied to the component leads.

It covers requirements for taping techniques used with equipment for automatic handling, pre-forming of leads, insertion and other operations and includes only those dimensions which are essential to the taping of components intended for the above-mentioned purposes.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.1

packaging

product made of any material of any nature to be used in containment, protection, structured alignment for automatic assembly, handling, and delivery

3.2

unguided lead

lead which is not held between carrier tape and hold-down tape

Note 1 to entry: See Figure 5.

3.3

crimp cinch

purposely formed angular deformation, starting at the reference plane, in such a way that the component bottom side does not touch the top surface of the printed circuit board after insertion and therefore acts as a "stand-off"

Note 1 to entry: The formed crimp is available in different forms, see Figure 2.

3.4**ordinate**

straight line, perpendicular to the abscissa through the centre of the closest sprocket hole that follows the component to be checked

3.5**abscissa**

straight line, through the centres of the sprocket holes in the direction of unreeling

3.6**seating plane**

<components with straight leads> bottom of the component body, including any projections which support the component on the printed board

Note 1 to entry: See Figure 1

Note 2 to entry: A method for determining the seating plane is given in IEC 60717.

3.7**seating plane**

<components with crimped (or preformed) leads> plane that changes depending on the profile of the crimp, the diameter of the leads and the hole size in the printed board

Note 1 to entry: See Figure 1 and Figure 2.

Note 2 to entry: For components with crimped (or preformed) leads, a reference plane is defined instead of a seating plane.

Note 3 to entry: A method for determining the seating plane is given in IEC 60717.

3.8**reference plane**

line parallel to the abscissa through the lowest centre of the radius of curvature of the bending of the crimp

Note 1 to entry: See Figure 1 and Figure 2.


4 Dimensions and specific requirements**4.1 General**

The symbols and dimensions are given in Figure 1 to Figure 6, Table 1, Annex A and Annex B. All dimensions of the component leads have the centreline of the lead as the reference line.

4.2 Coordinate system


The coordinate system common to tapes and taped components consists of an abscissa and an ordinate, both using the centre of the sprocket hole that follows the component to be checked as the reference point (see Figure 1).

To determine the position of components in the taped condition, the seating plane shall be used for components with straight leads, and the reference plane for components with crimped (or otherwise formed) leads (see Figure 2).

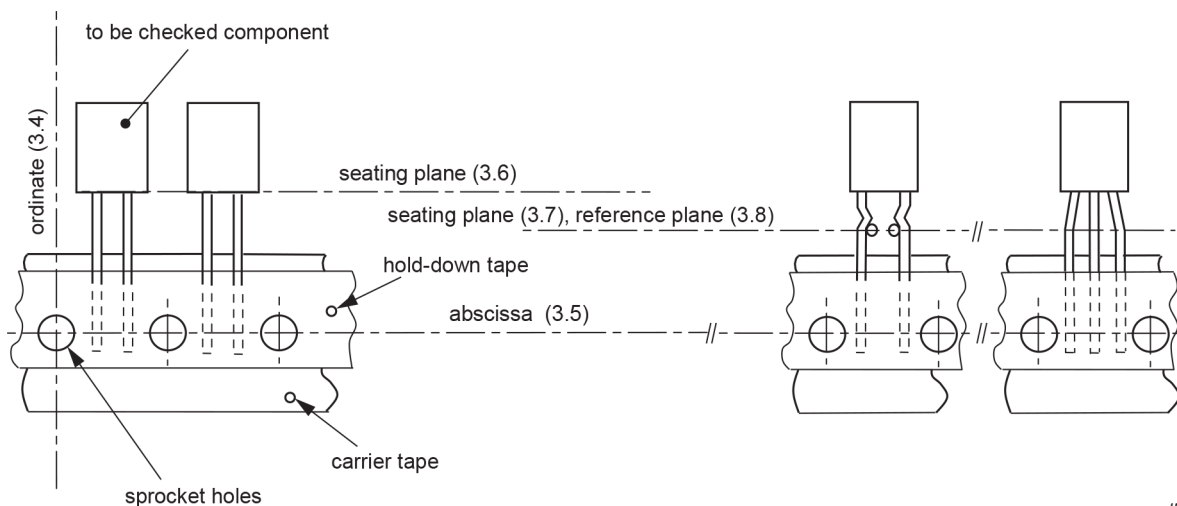

IEC

Figure 1 – Abscissa, ordinate, reference plane and seating plane

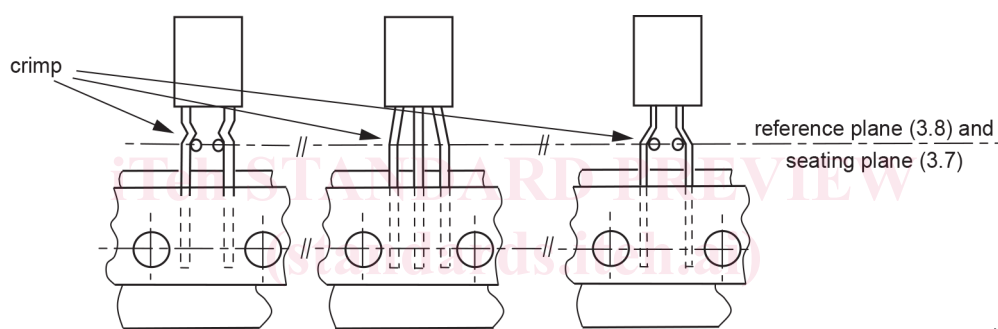


IEC

Figure 2 – Crimped or otherwise formed leads

4.3 Lead taping dimensions

Figure 3 to Figure 5 (Sketch A to Sketch F) provide examples of different taping styles. Table 1 lists the related symbols.

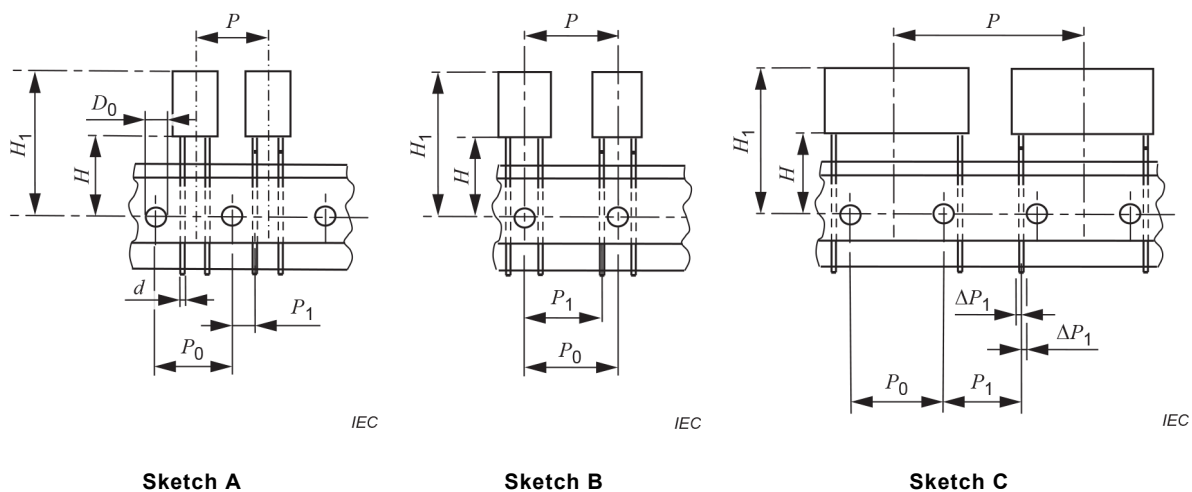

Sketch A

Sketch B

Sketch C

Figure 3 – Lead taping dimensions (straight leads)