



**Wireline Access Network Systems;  
General engineering for existing network reuse;  
Implementation of IP equipment on existing coaxial networks**

Document Preview

[ETSI TR 103 948 V1.1.2 \(2025-01\)](https://standards.iteh.ai/catalog/standards/etsi/e0185b58-3ada-41f5-997f-6bb45b6432f4/etsi-tr-103-948-v1-1-2-2025-01)

<https://standards.iteh.ai/catalog/standards/etsi/e0185b58-3ada-41f5-997f-6bb45b6432f4/etsi-tr-103-948-v1-1-2-2025-01>

---

**Reference**

---

RTR/ATTM-0639

---

**Keywords**

---

coaxial, customer premises networks, energy efficiency, fixed networks, network, power over coaxial cable, sustainability, video surveillance

---

**ETSI**

---

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

---

The present document can be downloaded from the  
[ETSI Search & Browse Standards](#) application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver](#) repository.

Users should be aware that the present document may be revised or have its status changed, this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our [Coordinated Vulnerability Disclosure \(CVD\)](#) program.

---

**Notice of disclaimer & limitation of liability**

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2025.  
All rights reserved.

# Contents

|                                                                  |    |
|------------------------------------------------------------------|----|
| Intellectual Property Rights .....                               | 5  |
| Foreword.....                                                    | 5  |
| Modal verbs terminology.....                                     | 5  |
| 1 Scope .....                                                    | 6  |
| 2 References .....                                               | 6  |
| 2.1 Normative references .....                                   | 6  |
| 2.2 Informative references.....                                  | 6  |
| 3 Definition of terms, symbols and abbreviations.....            | 7  |
| 3.1 Terms.....                                                   | 7  |
| 3.2 Symbols.....                                                 | 7  |
| 3.3 Abbreviations .....                                          | 7  |
| 4 Implementation of a wired capillary architecture.....          | 7  |
| 4.1 Capillary Architecture Wiring Types .....                    | 7  |
| 4.1.1 Generalities .....                                         | 7  |
| 4.1.2 Coaxial wiring .....                                       | 8  |
| 4.2 IP binding channel.....                                      | 8  |
| 4.2.1 IP link channel over Ethernet cable (point to point) ..... | 8  |
| 4.2.2 IP link chain over coaxial cable.....                      | 11 |
| 4.2.3 Renewal installation of existing video channels .....      | 13 |
| 4.3 Coaxial cables .....                                         | 14 |
| 4.3.1 Types of used coaxial cables.....                          | 14 |
| 4.3.2 Cable quality control.....                                 | 15 |
| 4.3.3 Curvature radius.....                                      | 16 |
| 4.3.4 Channel equipment insulation.....                          | 16 |
| 4.4 Connections .....                                            | 16 |
| 4.4.1 Connector choice .....                                     | 16 |
| 4.4.2 Choice and installation of coaxial junctions .....         | 16 |
| 4.5 Connection end.....                                          | 17 |
| 4.5.1 Detail on coaxial connections .....                        | 17 |
| 4.5.2 Concentrating points .....                                 | 18 |
| 4.5.3 Intermediate connections and junction boxes .....          | 20 |
| 4.5.4 Transport channel quality .....                            | 21 |
| 5 Access point and patchcord tracking.....                       | 21 |
| 5.1 Identification of access points .....                        | 21 |
| 5.1.0 Introduction.....                                          | 21 |
| 5.1.1 Numbering of access points .....                           | 21 |
| 5.1.2 Cables .....                                               | 21 |
| 5.1.3 Patchcords.....                                            | 21 |
| 6 Compliance criteria for identity reduction .....               | 22 |
| 6.1 Declaration of video equipment .....                         | 22 |
| 6.2 Type of link channels .....                                  | 22 |
| 6.2.1 Equipment POE power supply.....                            | 22 |
| 6.3 Specific constraints of video surveillance channels .....    | 22 |
| 6.4 Implementation of link channel.....                          | 23 |
| 6.4.1 Link channel quality .....                                 | 23 |
| 6.4.2 Connecting of concentrating video equipment .....          | 23 |
| 6.4.3 Cable quality control.....                                 | 23 |
| 6.5 Coaxial cable distribution.....                              | 24 |
| 6.5.1 Generalities .....                                         | 24 |
| 6.5.2 Patch panel front.....                                     | 24 |
| 6.5.3 Fitting description.....                                   | 24 |
| 6.6 IP link channel over coaxial cable.....                      | 25 |

|     |                                                          |    |
|-----|----------------------------------------------------------|----|
| 7   | Remote power supply of telecommunication equipment ..... | 25 |
| 7.1 | PoC supply (Power Over Coax) .....                       | 25 |
| 7.2 | Risks on contacts of PoC link channel .....              | 25 |
| 8   | Technical specifications of patchcords and jumpers ..... | 26 |
| 9   | Sustainability and efficiency recommendations .....      | 26 |
| 9.1 | General recommendations .....                            | 26 |
| 9.2 | Waste management .....                                   | 26 |
|     | History .....                                            | 27 |

iTech Standards  
(<https://standards.iteh.ai>)  
Document Preview

[ETSI TR 103 948 V1.1.2 \(2025-01\)](#)

<https://standards.iteh.ai/catalog/standards/etsi/e0185b58-3ada-41f5-997f-6bb45b6432f4/etsi-tr-103-948-v1-1-2-2025-01>

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Foreword

This Technical Report (TR) has been produced by ETSI Technical Committee Access, Terminals, Transmission and Multiplexing (ATTM).

---

# Modal verbs terminology

In the present document "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# 1 Scope

The present document supports deployment of video surveillance equipment standardized in ETSI TS 105 176-2 [i.1] and ETSI TR 105 177 [i.2] on existing networks.

## 2 References

### 2.1 Normative references

Normative references are not applicable in the present document.

### 2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regards to a particular subject area.

- [i.1] ETSI TS 105 176-2 (V1.1.1): "Access, Terminals, Transmission and Multiplexing (ATTM); Ethernet and power over cables; Part 2: Ethernet and power over coaxial cables for IP video surveillance".
- [i.2] ETSI TR 105 177 (V1.1.1): "Access, Terminals, Transmission and Multiplexing (ATTM); Benefit Analysis of Ethernet and power over coaxial cables - IP Video Surveillance Case Studies".
- [i.3] ETSI GR OEU 029 (V1.1.1): "Energy Efficient IP Video Surveillance Systems over Coaxial Cables".
- [i.4] ETSI EN 305 174-8 (V1.1.1): "Access, Terminals, Transmission and Multiplexing (ATTM); Broadband Deployment and Lifecycle Resource Management; Part 8: Management of end of life of ICT equipment (ICT waste/end of life)".
- [i.5] ETSI TS 105 174-8 (V1.1.1): "Access, Terminals, Transmission and Multiplexing (ATTM); Broadband Deployment and Lifecycle Resource Management; Part 8: Implementation of WEEE practices for ICT equipment during maintenance and at end-of-life".
- [i.6] ISO/IEC 11801-1 (2018): "Information technology -- Generic cabling for customer premises".
- [i.7] EIA/TIA 568-C.2: "Balanced Twisted-Pair Telecommunications Cabling and Components Standards".
- [i.8] EN 50173-1:2018: "Information technology - Generic cabling systems - Part 1: General requirements" (produced by CENELEC).
- [i.9] IEEE 802.3af™: "IEEE Standard for Information Technology - Telecommunications and Information Exchange Between Systems - Local and Metropolitan Area Networks - Specific Requirements - Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications - Data Terminal Equipment (DTE) Power Via Media Dependent Interface (MDI)".
- [i.10] IEEE 802.3at™: "IEEE Standard for Information technology-- Local and metropolitan area networks-- Specific requirements-- Part 3: CSMA/CD Access Method and Physical Layer Specifications Amendment 3: Data Terminal Equipment (DTE) Power via the Media Dependent Interface (MDI) Enhancements".

[i.11] IEEE 802.3bt™: "IEEE Standard for Ethernet Amendment 2: Physical Layer and Management Parameters for Power over Ethernet over 4 pairs".

## 3 Definition of terms, symbols and abbreviations

### 3.1 Terms

For the purposes of the present document, the following terms apply:

**User Interface (UI):** mechanism (preferably keyboard and display) to enable user interaction with the network

### 3.2 Symbols

Void.

### 3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

|       |                                        |
|-------|----------------------------------------|
| BNC   | Bayonet Nut Connector                  |
| CCTV  | Close Circuit TeleVision               |
| CuR   | Red Copper                             |
| DSL   | Digital Subscriber Line                |
| E&PoC | Ethernet and Power over Coax           |
| FeCu  | Steel Copper                           |
| I-BNC | I Bayonet Nut Connector                |
| ICT   | Information & Communication Technology |
| IP    | Internet Protocol                      |
| LAN   | Local Area Network                     |
| LSZH  | Low Smoke Zero Halogen                 |
| NF    | French Norm                            |
| POC   | Power over Coax                        |
| PoC   | Power over Coaxial                     |
| POE   | Power Over Ethernet                    |
| PoE   | Power over Ethernet                    |
| PUR   | Polyurethane                           |
| PVC   | PolyVinylChloride                      |
| T-BNC | T Bayonet Nut Connector                |
| UI    | User Interface                         |
| VMS   | Video Management System                |

## 4 Implementation of a wired capillary architecture

### 4.1 Capillary Architecture Wiring Types

#### 4.1.1 Generalities

The implementation of a wired capillary architecture is considered and broadly described as in Figure 1.

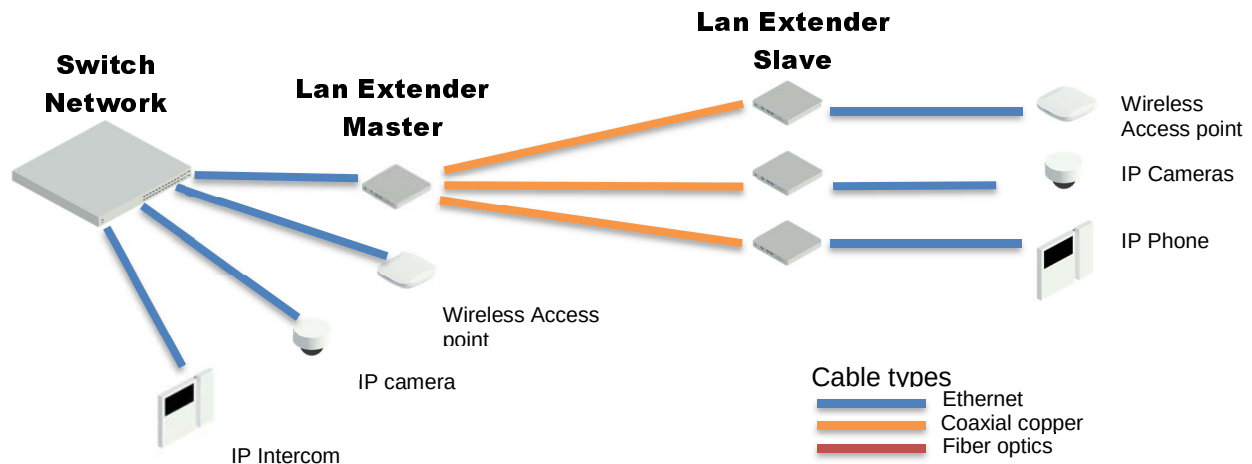


Figure 1: Capillary Architecture

Table 1: Types of wiring

| Cable use                      | Conductor type          | Equipment use                                                                                                      | POE                 | Circuit bypass |
|--------------------------------|-------------------------|--------------------------------------------------------------------------------------------------------------------|---------------------|----------------|
| Analog video                   | Coaxial conductor       | Old standard                                                                                                       | NO                  | NO             |
|                                | Optical fibre           | With dedicated converter                                                                                           | NO                  | NO             |
| IP video<br>Other IP equipment | Symmetric twisted pairs | Standard for equipment within 90 m                                                                                 | Low power equipment | NO             |
|                                | Coaxial conductor       | Standard for equipment over 90 m and less than 500 m<br>Very exceptionally up to 1 800 m (after report validation) | Low power equipment | YES            |
|                                | Optical fibre           | Standard for equipment over 500 m                                                                                  | NO                  | NO             |

### 4.1.2 Coaxial wiring

Coaxial cables will be used to connect access points that are more than 90 m from their network connection.

For renewal, it will be common to use existing coaxial cables regardless of their length for IP transport.

Commonly used coaxial cables have a characteristic impedance of 75  $\Omega$ .

Signals transported over coaxial wiring are historically analogue video signals. Use of Ethernet 10b2 type cables for such signals been used for such signals, and new applications of DSL technology now allow Ethernet signals to be transported over bifilar or + wires.


Coaxial link chains can be used to distribute signals over long lengths of cable with suitable end equipment. Depending on the signals to be transmitted, they allow the use of T-connectors.

## 4.2 IP binding channel

### 4.2.1 IP link channel over Ethernet cable (point to point)

Each element should meet a minimum category for the IP channel to match the described class, as described in Figure 2.



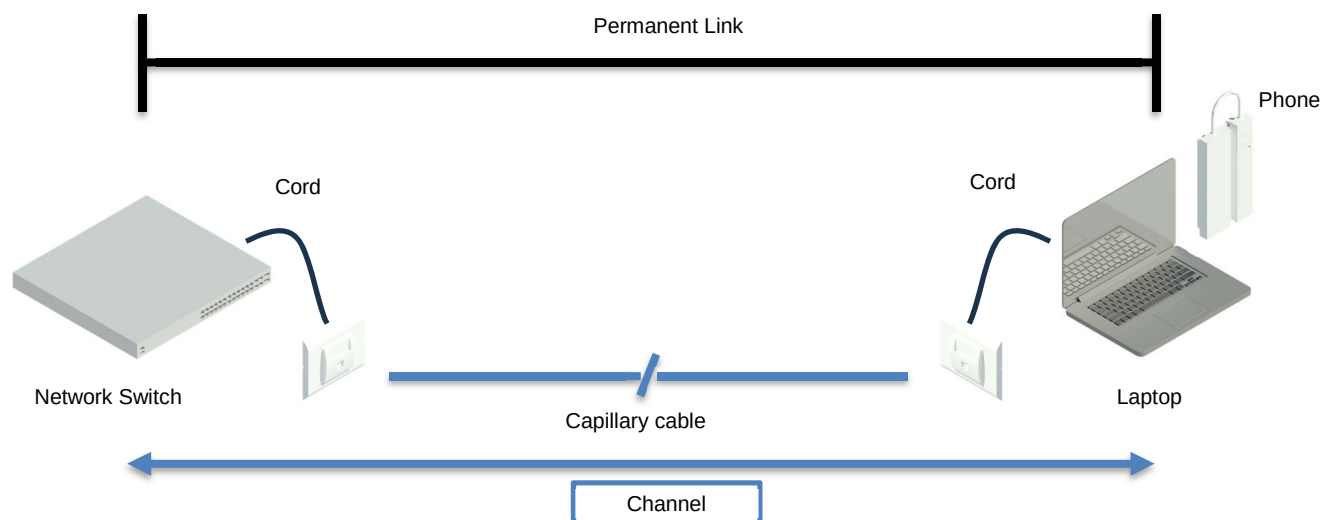

**Figure 2: IP link chain**

In operating mode, the following recommendations apply:

- Single equipment connection.
- Single cable connects installations, each equipment is connected by flexible patchcords.
- While additional breakpoints are possible but not recommended, it is important to note that they reduce bond length performance.


As a reminder, from class D, the categories have been subdivided as in Table 2.

**Table 2: Category (cable)**

| Category (cable)                          | CAT5    | CAT5e   | CAT6    | CAT6a   | CAT7    | CAT7a     | CAT7+     |
|-------------------------------------------|---------|---------|---------|---------|---------|-----------|-----------|
| Frequency of use (according to standards) | 100 MHz | 100 MHz | 250 MHz | 500 MHz | 600 MHz | 1 000 MHz | 1 200 MHz |
| Characterization frequency                | 200 MHz | 200 MHz | 450 MHz | 550 MHz | 900 MHz | 1 200 MHz | 1 500 MHz |
| Class (links)                             | D       | D       | E       | Ea      | F       | Fa        | Fa        |

The use of CAT6 or CAT6A is recommended to improve the velocity of propagation of the signal to receiver at the camera.

The patch cord should have a minimum section of AWG24 stranded copper (Not copper Clad Aluminium).

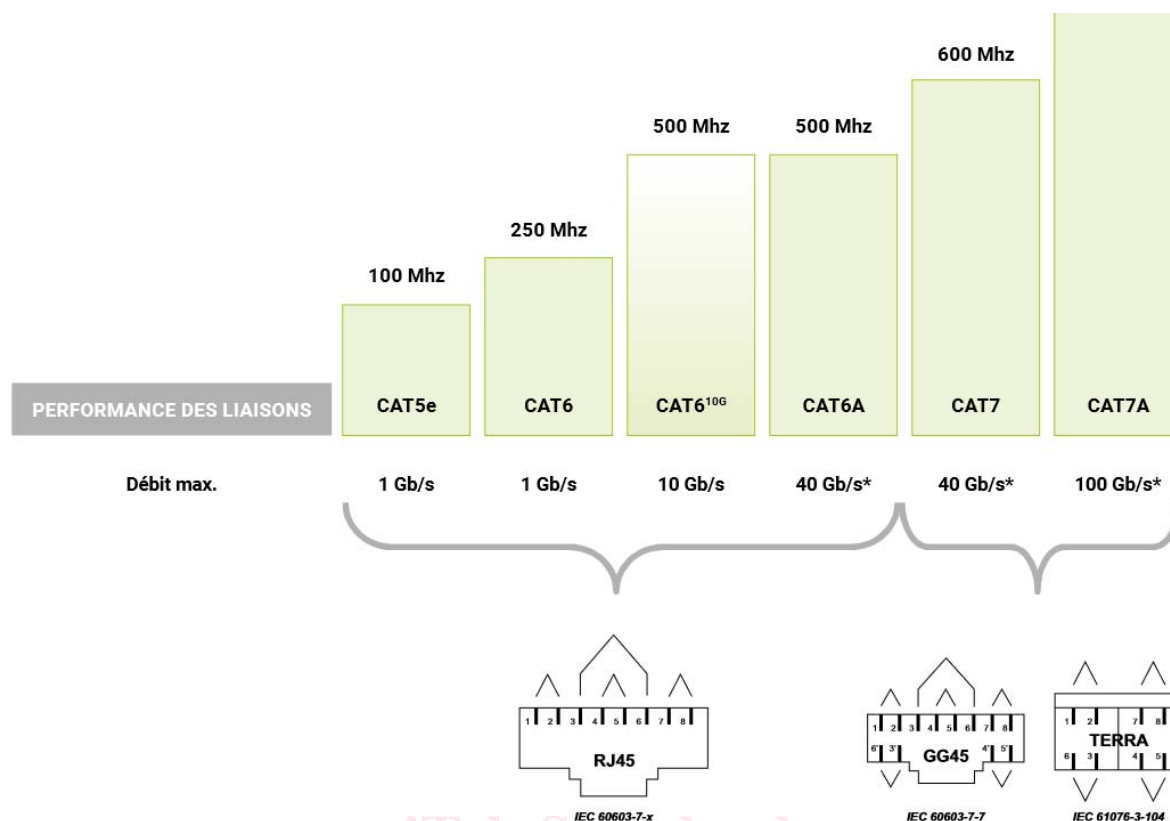


**Figure 3: Cable categories and their characteristics**

It is advisable to specialize in CCTV wiring. This is to limit malicious disconnections:

- Separation of CCTV concentration points.
- Camera access point is enclosed in the terminal installation, no accessible wall access.
- Outdoor Ethernet access points should be protected against corrosion (IP65 installation).

4-pair cables will be subject to a validation test performed according to ISO/IEC 11801 [i.6] Class Ea, EIA/TIA 568-C.2 CAT6A [i.7], EN 50173-1 [i.8] Class Ea standard, for Ethernet link channel whose ends are connected in RJ45 (see Figure 4).

#### Fixed installation cable

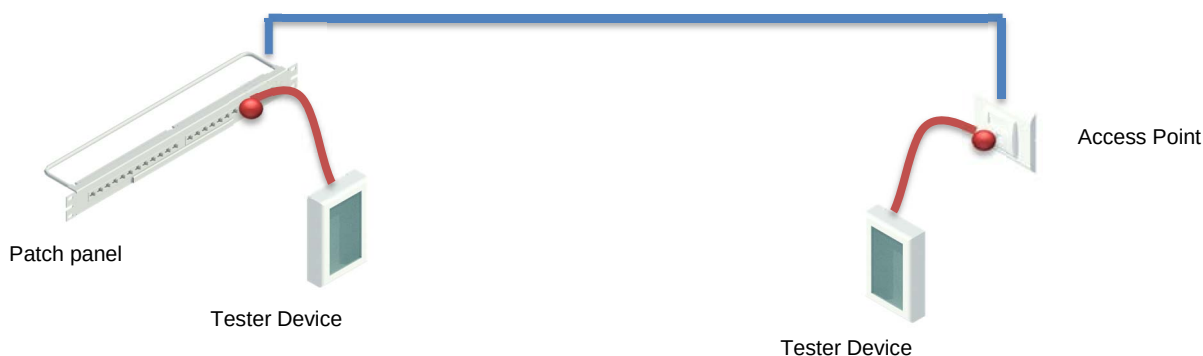

**Figure 4: Permanent link test**

For this test, two measurement patchcords supplied with a tester are used.