
**Sludge recovery, recycling, treatment
and disposal — Guidance on the
processes and technologies on
inorganics and nutrients recovery**

*Valorisation, recyclage, traitement et élimination des boues — Guide
sur les procédés et les technologies de récupération des substances
inorganiques et des nutriments*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/PRF TR 22707

<https://standards.iteh.ai/catalog/standards/sist/e0a7e10c-4130-40d7-89ce-25c73c7a29a6/iso-prf-tr-22707>

PROOF / ÉPREUVE



iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/PRF TR 22707

<https://standards.iteh.ai/catalog/standards/sist/e0a7e10c-4130-40d7-89ce-25c73c7a29a6/iso-prf-tr-22707>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Methods of nutrient recovery from sludge	2
5 Phosphorus recovery	2
5.1 General.....	2
5.2 Struvite recovery from anaerobic digested sludge and/or filtrate of anaerobic digested sludge.....	3
5.2.1 Principles.....	3
5.2.2 Schematic diagram.....	4
5.2.3 Operating conditions.....	5
5.2.4 Characteristics of recovered products.....	5
5.3 Hydroxyapatite recovery.....	5
5.3.1 Principles.....	5
5.3.2 Schematic diagram.....	6
5.3.3 Operating conditions.....	6
5.3.4 Characteristics of recovered products.....	6
5.4 Phosphorus recovery from incineration ash.....	6
5.4.1 Principles.....	6
5.4.2 Alkaline treatment.....	7
5.4.3 Acidic treatment.....	8
5.4.4 Characteristics of recovered products/residues.....	8
5.5 Phosphorus recovery from sewage sludge slag.....	8
5.5.1 Principles.....	8
5.5.2 Schematic diagram.....	8
5.5.3 Operating conditions.....	9
5.5.4 Characteristics of recovered products.....	9
5.6 Other technologies for phosphorus recovery.....	10
5.7 Summary.....	10
6 Recovery of other nutrients	11
6.1 General.....	11
6.2 Nitrogen.....	11
6.3 Sulfur.....	11
6.4 Potassium.....	11
7 Recovery of other inorganics	11
7.1 General.....	11
7.2 Metals.....	11
Annex A (informative) Sewage sludge composition	13
Annex B (informative) Case studies	14
Bibliography	39

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 275, *Sludge recovery, recycling, treatment and disposal*.

ISO/PRF TR 22707

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

Inorganics and nutrient recovery is necessary to build a sustainable society; there are many studies and plants all over the world that demonstrate this concept. Above all, phosphorus recovery systems to produce fertilizer material are increasingly common and other nutrients recovery systems are now being developed.

This document provides a selected overview of various technologies and is based on country standards and guidance documents already in existence or under preparation, and documents provided by private organizations.

As inorganics and nutrient recovery knowledge and technology is developing rapidly, this document will therefore be reviewed regularly to reflect the advancing nature of the industry and technology.

[Annex A](#) provides examples of sewage sludge composition, which can help determine which element(s) can be recovered. [Annex B](#) provides case studies of nutrient recovery, including practical and emerging ones.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/PRF TR 22707

<https://standards.iteh.ai/catalog/standards/sist/e0a7e10c-4130-40d7-89ce-25c73c7a29a6/iso-prf-tr-22707>

Sludge recovery, recycling, treatment and disposal — Guidance on the processes and technologies on inorganics and nutrients recovery

1 Scope

This document provides information on the processes and technologies for inorganics and nutrients recovery from sludge.

This document is applicable to sludge and products from urban wastewater collection systems, night soil, wastewater treatment plants for urban and similar industrial waters. It includes all sludge that can have similar environmental and/or health impacts.

Hazardous sludge from industry and dredged sludge are excluded from this document.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

ammonia stripping

method of the removal of ammoniacal compounds from water by making it alkaline and of aeration

3.2

calcium phosphate

salts that consist of calcium ions and phosphate ions

Note 1 to entry: Hydroxyapatite (HAP) is a form of calcium phosphate.

3.3

centrate

liquid product from a centrifugal dewatering device

3.4

hydroxyapatite

HAP

sparingly soluble salt that is generated from phosphate and calcium ions

Note 1 to entry: The general chemical formula of HAP is $\text{Ca}_{10}(\text{OH})_2(\text{PO}_4)_6$.

3.5

incineration ash

residue of combustion

3.6

nutrient

element required by living organisms throughout the course of their lives in small quantities for a range of physiological functions

3.7

seed crystal

crystal employed as a nucleus to generate and grow crystals in the crystallization process

3.8

struvite

compound which is precipitated by magnesium addition to water with high concentration of phosphate and ammonium ions

Note 1 to entry: The chemical formula of struvite is $\text{MgNH}_4\text{PO}_4 \cdot 6\text{H}_2\text{O}$.

4 Methods of nutrient recovery from sludge

There are four methods for nutrient recovery from sludge, which are whole use, cleaning, separation and extraction.

- a) **Whole use:** Whole use of sludge is a simple use method in which sludge, which is typically aerobically or anaerobically treated (e.g. compost), is directly applied to land as fertilizer or soil improver. This method can minimize the loss of the nutrients in the treatment process and may achieve the highest potential of utilizing the nutrients in sludge.
- b) **Cleaning:** Cleaning is the process in which sludge has contaminants such as plastics or heavy metals removed by mechanical treatment or chemical extraction. The cleaned sludge can be handled in the same way as whole use.
- c) **Separation:** Separation is the process in which sludge is divided into two or more different parts. Sludge is separated by physical or chemical parameters such as size, shape, specific gravity difference and chemical affinity. All or only the least contaminated part of separated sludge may then be utilized. In this method, sludge contains various nutrients.
- d) **Extraction:** Extraction is the way in which only the target element is taken out as a compound using chemical actions. Fewer nutrients in sludge are made available or utilized through extraction processes than in whole use, cleaning and separation methods. However, the process has some advantages:
 - reduces the storage volume of the nutrient;
 - prevents contamination of the recovered material by hazardous elements;
 - stabilizes the recovered materials as a chemical compound;
 - improve the value of the recovered materials.

Precipitation including stripping processes can decrease the volatile nutrients content.

This document is focused on nutrients which can be recovered by extraction.

5 Phosphorus recovery

5.1 General

Phosphorus is an essential element for plant growth and is an important ingredient of chemical fertilizer products. The dry solid contents of sludge normally include more than 1,0 % phosphorus and it can reach 5,0 % of sludge under certain operating conditions, such as biological dephosphorization or anaerobic-anoxic-oxic processes.

On the other hand, the supply of phosphate ore in the global market is strongly influenced by political and economical issues and often gets unstable, as it is quite unevenly distributed globally. Therefore, studies and commercialization of phosphorus recovery from sludge is the most progressive area in inorganic / nutrient materials recovery.

Phosphorus can be recovered from sludge using various chemical compounds. The phosphorus recovery process that is described in [Clause 5](#) is summarized in [Figure 1](#).

For case studies, refer to [Clauses B.1](#) to [B.11](#).

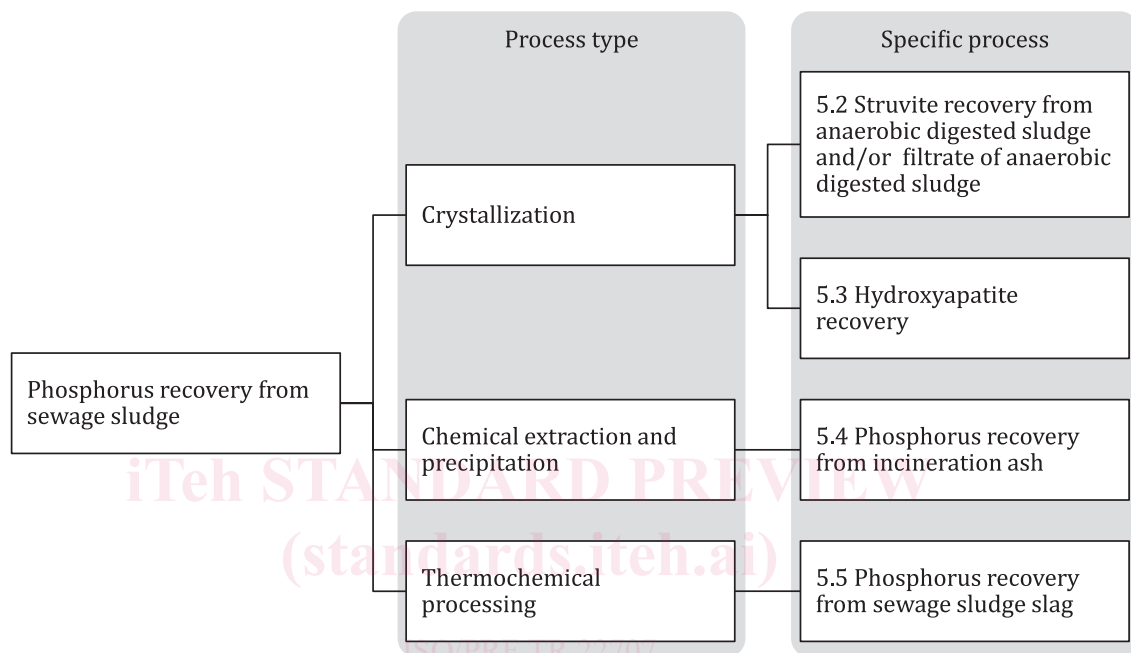


Figure 1 — Summary of phosphorus recovery process

5.2 Struvite recovery from anaerobic digested sludge and/or filtrate of anaerobic digested sludge

5.2.1 Principles

The principles of the struvite recovery process are based on the chemical precipitation carried out in a crystallizer followed by particle separation. The chemical reaction for struvite is:



This reaction is the same as the scale formation which is frequently observed in anaerobic sludge treatment facilities. The difference of struvite recovery from scale formation is well-controlled chemical dosing, pH control and particle separation. After the application of this process, much less scale formation is likely to occur in treatment facilities.


Recovered struvite can be used as delayed release fertilizer because of its low solubility.

There are two types of crystallizer processes - agitation by air or mechanical agitation.

Both methods of crystallization are employed in commercial operations. Wastewater employed for this process is a filtrate of anaerobically digested sludge (ADS) or ADS itself and industrial wastewater containing phosphate and ammonium. Under optimum operating conditions, dissolved phosphorus recovery can reach more than 80 % using this process.

5.2.2 Schematic diagram


Schematic diagrams for an air fluidized crystallizer and a mechanical agitator are shown in Figures 2 and 3. An influent such as a filtrate of ADS, and/or ADS, is mixed in the reactor with magnesium (Mg) salt and struvite granules (as seed crystal). Alkalisising chemicals such as sodium hydroxide solution can be added for pH control.

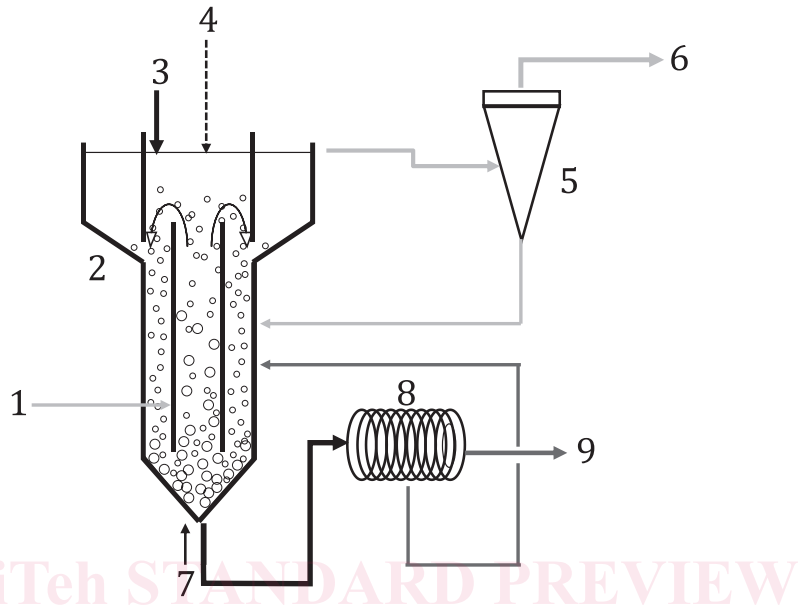

Key

- | | | | |
|---|---------------------|---|--------------------------|
| 1 | ADS or ADS liquor | 6 | treated sludge or liquor |
| 2 | phosnix reactor | 7 | air |
| 3 | Mg(OH) ₂ | 8 | rotary sieve |
| 4 | NaOH | 9 | struvite |
| 5 | liquid cyclone | | |

Figure 2 — Schematic diagram of a fluidized bed reactor^[1]

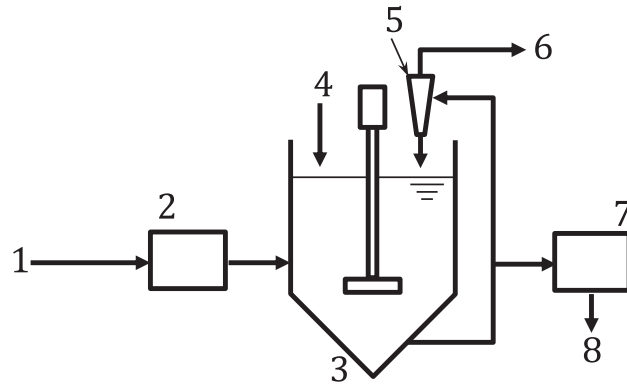**Key**

1	digested sludge	5	struvite separator (cyclone)
2	trash removal equipment	6	treated sludge
3	crystallization reactor	7	washing/drying equipment
4	Mg(OH) ₂	8	recovered struvite

SOURCE Reference [2]. Reproduced with the permission of the authors.

Figure 3 — Schematic diagram of a stirred tank reactor

5.2.3 Operating conditions

The key factors influencing struvite recovery rates are inflow concentrations of phosphate and ammonium, the dosing rate of magnesium ions, alkalinity and pH.

The concentration of phosphate needs to be higher than 50 mg/l of P, preferably over 100 mg/l of P and ammonia over 300 mg/l of N. From an economical point of view, the pH needs to remain in the range of 7,5 to 9,0. Various Mg compounds can be used as a source of Mg including, Mg(OH)₂, MgCl₂ and MgSO₄. Seawater can also be used as a source of Mg.

5.2.4 Characteristics of recovered products

Recovered struvite is crystalline with few impurities. Its shape depends on the above discussed operating conditions, including pH, temperature, agitation and the retention time of struvite particles in the crystallizer.

5.3 Hydroxyapatite recovery

5.3.1 Principles

The principles of hydroxyapatite (HAP) recovery process is based on chemical precipitation carried out in a crystallizer followed by particle separation. The chemical reaction for HAP is:



HAP recovery systems require well-controlled chemical dosing, pH control and particle separation.


Recovered HAP can be used as raw material for fertilizers.

A crystallizer is a type of mixing reactor employed in commercial operations. The applicable wastewater for this process will be black water (human faeces and urine), industrial wastewater containing phosphate and filtrate from sludge treatment processes.

Under general operating conditions, dissolved phosphorous recovery can reach 70 % through this process.

5.3.2 Schematic diagram

A schematic diagram for a crystallizer is shown in Figure 4. Influent such as filtration liquid, calcium chloride and HAP granules (as seed crystal) are mixed in the mixing reactor. Sodium hydroxide solution is added for pH control.

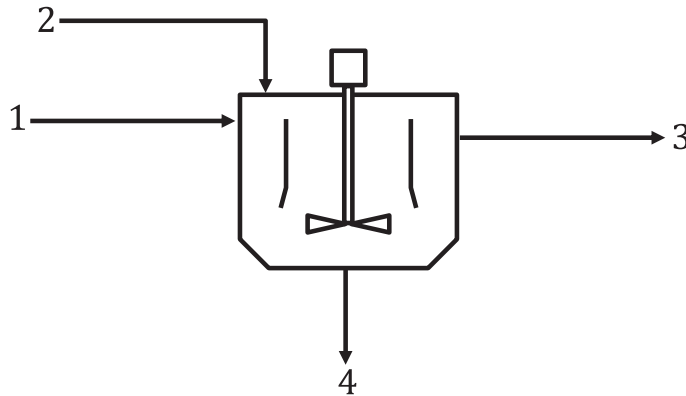

- Key**
- 1 filtration liquid
 - 2 calcium chloride
 - 3 effluent
 - 4 HAP

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Figure 4 — Schematic diagram for HAP recovery

<https://standards.iteh.ai/catalog/standards/sist/e0a7e10c-4130-40d7-89ce-25c73c7a29a6/iso-prf-tr-22707>

5.3.3 Operating conditions

The key factors influencing HAP recovery are inflow concentrations of phosphate, carbonate ion, the dosing rate of calcium ions, alkalinity and pH.

The concentration of phosphate is required to be around 50 mg/l of P. From an economical point of view, the pH needs to remain in the range of 7,5 to 9,0.

5.3.4 Characteristics of recovered products

Recovered HAP is a crystalline structure with few impurities. Its shape depends on the above discussed operating conditions including pH, temperature, agitation and the retention time of HAP particles in the crystallizer.

5.4 Phosphorus recovery from incineration ash

5.4.1 Principles

When advanced wastewater treatment technologies have been employed, phosphorus tends to increasingly concentrate in sludge. As a result, incineration ash from sewage sludge contains almost the same concentration of phosphorus as that of natural phosphate ore, shown in Figure 5. Sewage sludge ash is expected as one of the alternative sources of phosphorus which is concerned for depletion in the future.

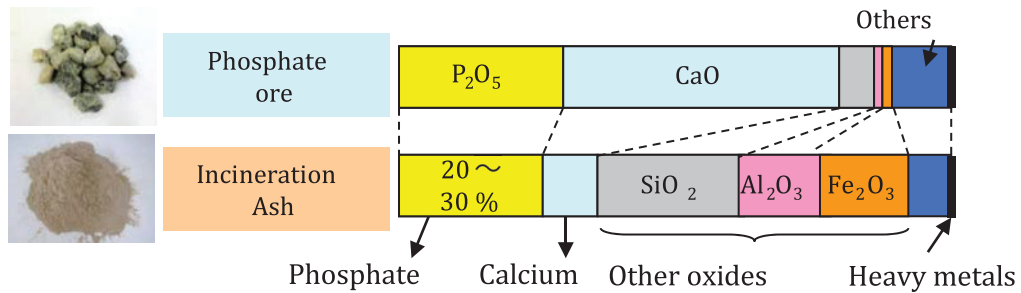


Figure 5 — Composition comparison between phosphate ore and incineration ash

Phosphorus recovery from incineration ash can be achieved by means of a chemical reaction, which is leaching and precipitation. Leach is performed under both alkaline and acidic condition.


Sewage sludge ash can be used directly as a P fertilizer. This direct utilization, however, is only possible for sewage sludges with a low level of contamination. See [Clause B.8](#).

5.4.2 Alkaline treatment

5.4.2.1 Schematic diagram

A schematic diagram of the phosphorus recovery process from incineration ash is shown in [Figure 6](#). It consists of two reaction tanks.

In the first reactor, phosphate is extracted from the incineration ash by using alkaline solution. In the second reactor, phosphorus-rich sediment is precipitated by adding slaked calcium ($\text{Ca}(\text{OH})_2$) into a solution taken from the first reactor. The solution after collecting phosphorus-rich sediment is recycled and returned into the first reactor.

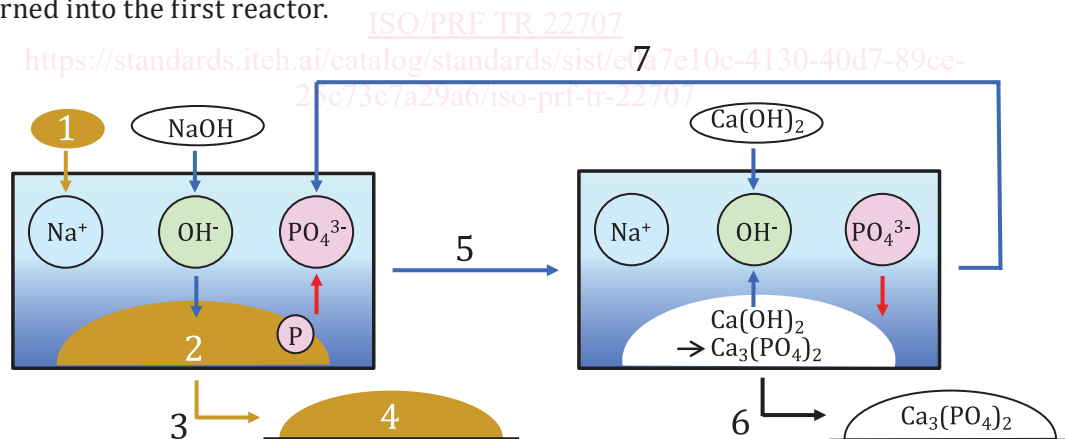

Key

- 1 ash
- 2 incinerated ash
- 3 extraction
- 4 neutralized ash
- 5 PO_4^{3-} rich solution
- 6 precipitation
- 7 circulation of recycled solution

Figure 6 — Schematic diagram of phosphorus recovery from incineration ash