



# Standard Specification for Elliptical Trainers<sup>1</sup>

This standard is issued under the fixed designation F2810; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

## INTRODUCTION

The goal of this specification is to promote proper design and manufacturing practices for elliptical training equipment. Through these specifications this standard aims to assist designers and manufacturers in reducing the possibility of injury when these products are used in accordance with the operational instructions.

The equipment user must recognize, however, that a standard alone will not necessarily prevent injuries. Like other physical activities, exercise involving fitness equipment involves the risk of injury, particularly if the equipment is used improperly or not properly maintained. In addition, users with physical limitations should seek medical advice or instruction from the fitness facility, or both, prior to using this equipment. Certain physical conditions or limitations may preclude some persons from using this equipment properly and without increasing the risk of serious injury.

## 1. Scope

1.1 This specification establishes parameters for the design and manufacture of elliptical training equipment as defined in 3.1 for use in an indoor environment or setting.

1.2 It is the intent of this standard to specify fitness products for use only by an individual age 13 or older.

1.3 This standard is to be used in conjunction with Specification F2276 and Test Methods F2811. All specifications in this standard supersede those of Specification F2276 where applicable.

1.4 The values stated in SI units are to be regarded as standard. The values in parentheses are for information only.

1.5 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

## 2. Referenced Documents

### 2.1 ASTM Standards:<sup>2</sup>

<sup>1</sup> This specification is under the jurisdiction of ASTM Committee F08 on Sports Equipment, Playing Surfaces, and Facilities and is the direct responsibility of Subcommittee F08.30 on Fitness Products.

Current edition approved May 1, 2010. Published June 2010. DOI: 10.1520/F2810-10.

<sup>2</sup> For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

F1749 Specification for Fitness Equipment and Fitness Facility Safety Signage and Labels

F2276 Specification for Fitness Equipment

F2571 Test Methods for Evaluating Design and Performance Characteristics of Fitness Equipment

F2811 Test Methods for Evaluating Design and Performance Characteristics of Elliptical Trainers

## 3. Terminology

3.1 *Definitions*—The terms listed below are unique to this specification. For terms not defined below, refer to Specification F2276.

3.1.1 *adjustable guide system, n*—components that allow the user to vary the angle or position of a guide surface.

3.1.2 *control panel, n*—equipment/user interface device for controlling the operation of, or displaying information about the operational state of the equipment.

3.1.3 *elliptical trainer, n*—training equipment that can produce a continuous, predominately elliptical motion path. Elliptical training functions as a continuous non-circular closed loop cycle.

3.1.4 *fixed handlebar, n*—handlebars that are stationary.

3.1.5 *foot support, n*—a device designed to support the foot while the user is correctly performing the exercise as intended by the manufacturer, or while the user mounts or dismounts the equipment. Illustrated in Fig. 1.

3.1.6 *handlebar, n*—the means that are provided to a user to enhance balance and stability. Handlebars shall be defined by the manufacturer as the intended grippable zone.

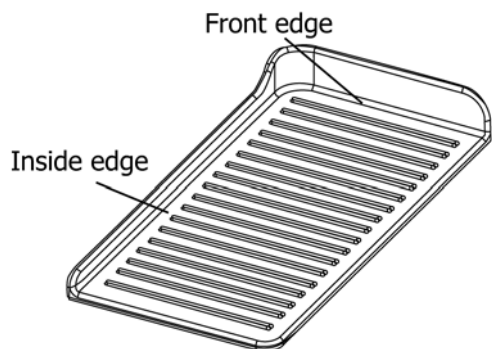


FIG. 1 An Example of a Foot Support

3.1.7 *movable handlebar, n*—the moving means that are provided for a user to engage the upper body during the exercise.

#### 4. Equipment Types

4.1 *Elliptical Trainer With Fixed Handlebars (Type 1)*—Handlebars are in a fixed position and are not intended to provide guided or un-guided motion of the user’s upper body, as shown in Fig. 2.

4.2 *Elliptical Trainer With Moveable Handlebars (Type 2)*—Handlebars are configured to provide for guided or un-guided motion of the user’s upper body, as shown in Fig. 3.

4.3 *Elliptical Trainer With Moveable and Fixed Handlebars (Type 3)*—Exercise equipment that contains both fixed and moveable handlebars as described in 4.1 and 4.2, as shown in Fig. 4.

#### 5. Design and Construction Requirements

NOTE 1—In addition to the requirements of Specification F2276, the following requirements are applicable.

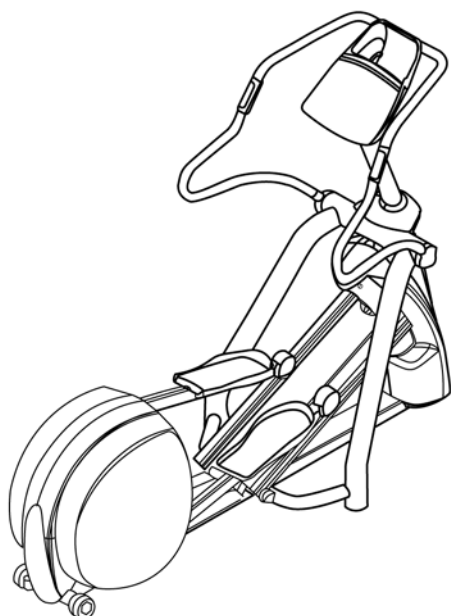


FIG. 2 An Example of a Type 1 Elliptical Trainer With Fixed Handlebars

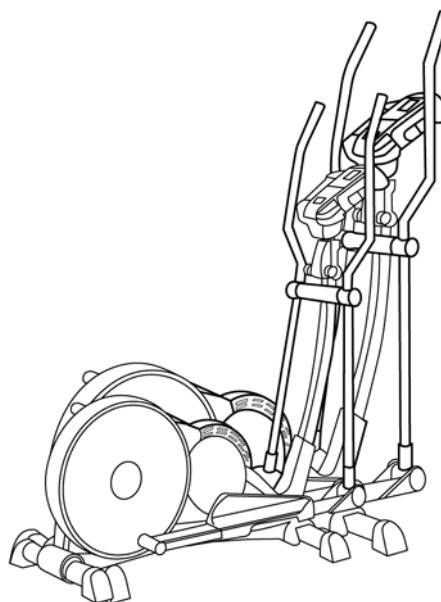


FIG. 3 An Example of a Type 2 Elliptical Trainer With Movable Handlebars

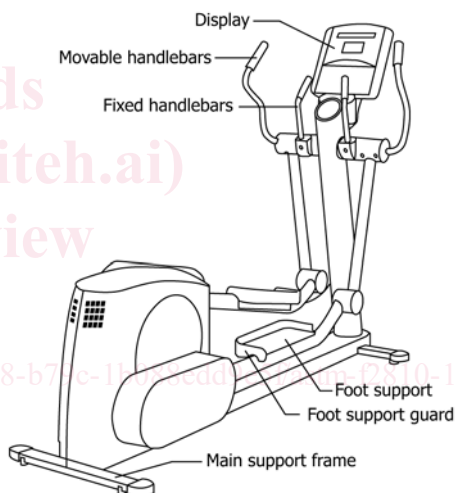


FIG. 4 An Example of a Type 3 Elliptical Trainer With Movable and Fixed Handlebars

5.1 *Foot Support*—Equipment shall be equipped with adequate foot support and constructed to reduce foot slippage. The foot supports shall have a slip resistant surface of at least 300 mm long by 100 mm wide (11.8 in. by 3.9 in.) as well as have a guard with at least 30 mm (1.2 in.) height along the front and 12 mm (0.50 in.) along the inside edge.

5.1.1 *Foot Support Loading*—The loading requirements of Specification F2276 shall be applicable.

5.2 *Handlebars*—Equipment shall be equipped with at least one handlebar.

5.2.1 The ends of movable handlebars shall be designed to avoid eye socket penetration. Acceptable provisions may include, but are not limited to, a 50 mm (1.97 in.) diameter end portion of the handlebar grip; bending of the handlebar to achieve an end portion greater than 50 mm (1.97 in.) in diameter, angling of the end portion of the movable handlebar