SLOVENSKI STANDARD
SIST EN 16890:2017+A1:2021

01-september-2021

Nadomešča:
SIST EN 16890:2017

Pohištvo za otroke - Posteljni vložki za posteljice in zibelke - Varnostne zahteve in preskusne metode (vključuje dopolnilo A1)

Children's furniture - Mattresses for cots and cribs - Safety requirements and test methods

Kindermöbel - Matratzen für Kinderbetten und Krippen - Sicherheitstechnische Anforderungen und Prüfverfahren

Mobilier pour jeunes enfants - Matelas pour berceaux et lits à nacelle - Exigences de sécurité et méthodes d'essai

Ta slovenski standard je istoveten z: **EN 16890:2017+A1:2021**

ICS:

97.140	Pohištvo	Furniture
97.190	Otroška oprema	Equipment for children

SIST EN 16890:2017+A1:2021 **en,fr,de**

EUROPEAN STANDARD

NORME EUROPÉENNE

EUROPÄISCHE NORM

EN 16890:2017+A1

June 2021

ICS 97.140; 97.190

Supersedes EN 16890:2017

English Version

Children's furniture - Mattresses for cots and cribs - Safety requirements and test methods

Mobilier pour jeunes enfants - Matelas pour berceaux et lits à nacelle - Exigences de sécurité et méthodes d'essai

Kindermöbel - Matratzen für Kinderbetten und Krippen - Sicherheitstechnische Anforderungen und Prüfverfahren

This European Standard was approved by CEN on 3 March 2017 and includes Amendment 1 approved by CEN on 23 May 2021.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.

EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

Ref. No. EN 16890:2017+A1:2021 E

Contents

Page

European foreword

This document (EN 16890:2017+A1:2021) has been prepared by Technical Committee CEN/TC 207 “Furniture”, the secretariat of which is held by UNI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by December 2021, and conflicting national standards shall be withdrawn at the latest by December 2021.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

This document includes Amendment 1 approved by CEN on 23 May 2021.

This document supersedes A1 EN 16890:2017 A1

The start and finish of text introduced or altered by amendment is indicated in the text by tags A1 A1.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive(s).

For relationship with EU Directive(s), see informative Annex ZA, which is an integral part of this document.

According to the CEN-CENELEC Internal Regulations, the national standards organisations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

1 Scope

This European Standard specifies safety requirements and test methods for mattresses including mattress bases and mattress toppers, used in children's cots, travel cots, cribs and suspended baby beds, for domestic and non-domestic use.

This European Standard does not apply to mattresses for carry cots and pram bodies, inflatable mattresses, water mattresses and mattresses used for medical purposes.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

A1

EN 71-1:2014+A1:2018, *Safety of toys - Part 1: Mechanical and physical properties* A1

EN 71-2:2011+A1:2014, *Safety of toys - Part 2: Flammability*

A1

EN 71-3:2019, *Safety of toys - Part 3: Migration of certain elements*

EN 597-1:2015, *Furniture - Assessment of the ignitability of mattresses and upholstered bed bases - Part 1: Ignition source smouldering cigarette* A1

EN 1334:1996, *Domestic furniture - Beds and mattresses - Methods of measurement and recommended tolerances*

A1

EN 1730:2012, *Furniture - Tables - Test methods for the determination of stability, strength and durability*

EN ISO 2439:2008, *Flexible cellular polymeric materials - Determination of hardness (indentation technique) (ISO 2439:2008)*

EN ISO 13936-2:2004, *Textiles - Determination of the slippage resistance of yarns at a seam in woven fabrics - Part 2: Fixed load method (ISO 13936-2:2004)* A1

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1
mattress topper
upholstery product that comprises a cover and filling(s) designed to be used on top of a mattress

3.2
mattress base
cot base and a mattress combined in one component

A1 **3.3**
woven fabric
fabric produced by interlacing (by weaving on a loom or weaving machine) a set of warp threads and a set of weft threads normally at right angles to each other

3.4
nonwoven fabric
engineered fibrous assembly primarily planar, which has been given a designed level of structural integrity by physical and/or chemical means, excluding weaving, knitting or papermaking

3.5
knitted fabric
fabric in which at least one system of threads is formed into knitted loops and the knitted loops are intermeshed into stitches A1

4 General test conditions

4.1 Preliminary preparation

The furniture shall be tested as delivered.

Unless otherwise specified, the tests shall be carried out on the same sample.

Unless otherwise specified by the manufacturer, the sample shall be stored in indoor ambient conditions for at least 24 h immediately prior to testing.

The tests shall be carried out at indoor ambient conditions. However, if during a test the temperature is outside the range 15 °C to 25 °C, the maximum and/or minimum temperature shall be recorded in the test report.

4.2 Application of forces

The test forces in durability and static load tests shall be applied sufficiently slowly to ensure that negligible dynamic load is applied. The forces in durability tests shall be applied sufficiently slowly to ensure that kinetic heating does not occur.

Unless otherwise stated, static forces shall be maintained for (10 ± 2) s. Unless otherwise stated, durability forces shall be maintained for (2 ± 1) s.

The forces may be replaced by masses. The relationship 10 N = 1 kg shall be used.

4.3 Tolerances

Unless otherwise stated, the following tolerances apply:

— Forces: ± 5 % of the nominal force;

— Masses: ± 0,5 % of the nominal mass;

— Dimensions: ± 1 mm of the nominal dimension;

— Positioning of loading pads: ± 5 mm;

NOTE For the purposes of uncertainty measurement, test results are not considered to be adversely affected when the above tolerances are met.

5 Test equipment

5.1 Measuring table

A1 A horizontal, flat and smooth surface with dimensions sufficient to fully support the mattress in any measuring position. The maximum deflection shall not exceed 1 mm when a force of 1 000 N is applied to the table when tested in accordance with EN 1730:2012, 6.3. A1

5.2 Stops

Stops shall be used to prevent the mattress from sliding by any means which do not affect the test result.

5.3 Square aluminium alloy tube

40 mm in width x 40 mm in height x 2 mm in thickness, approximately 2 m long, having a mass of (1,65 ± 0,012 5) kg.

5.4 Loading pad

Rigid circular object 200 mm in diameter, the face of which has a convex spherical curvature with a radius of 300 mm radius with a 12 mm edge radius (see Figure 1).

Dimensions in millimetres

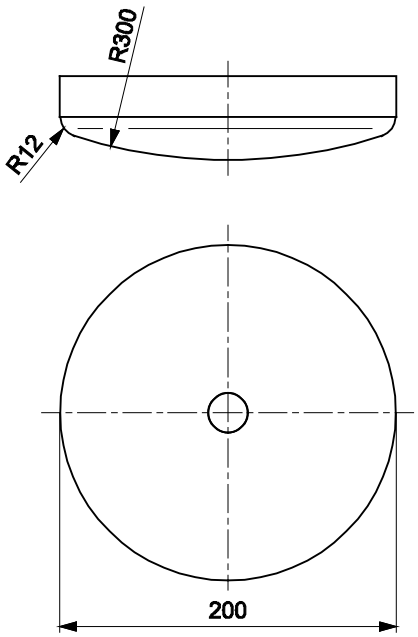

Figure 1 — Loading pad

5.5 Test template for determination of the indentation depth

The test template shall be made from hard smooth material with the dimensions shown in Figure 2. It shall have a total mass of (0,26 ± 0,01) kg. The edges of the template shall be rounded with a radius of ≤ 0,1 mm and it shall have a hole in its centre with a diameter of (111 ± 0,1) mm, see Figure 2.

Dimensions in millimetres

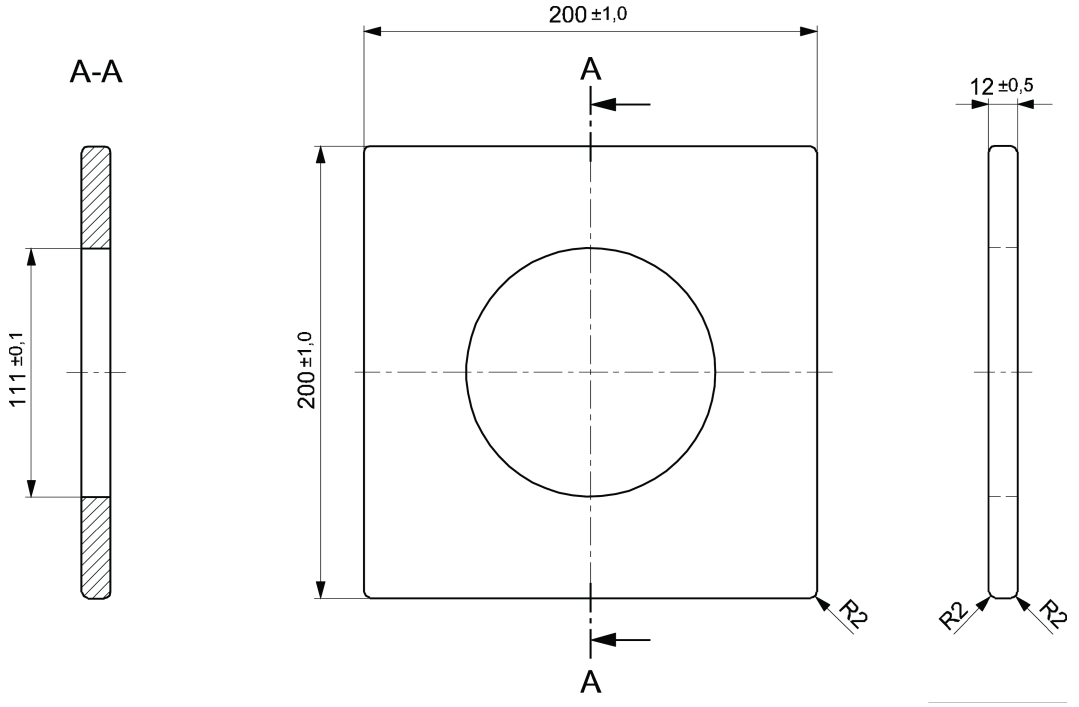

a) Intersection view **b) Top view** **c) Side view**

Figure 2 — Test template for determination of firmness

5.6 Spherical load for determination of the indentation depth

The spherical load shall have a diameter of $115\ ^{0,5}_{0}$ mm and a mass of (2,5 ± 0,012 5) kg.

5.7 Test foam

A layer of flexible PU foam, corresponding to the dimensions of the mattress topper to be tested, having a thickness of 100 mm, a density of (25 ± 2,5) kg/m³ and a hardness of (120 ± 12) N in accordance with $A_{(40\ \%/30s)}$ of EN ISO 2439.

5.8 Small parts cylinder

A cylinder having dimensions as shown in Figure 3.

Dimensions in millimetres

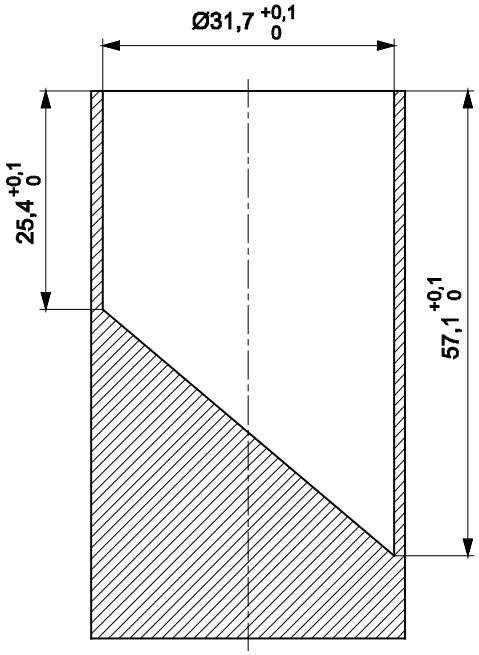

Figure 3 — Small parts cylinder

5.9 Feeler gauge

A feeler gauge with the dimensions shown in Figure 4.

Dimensions in millimetres

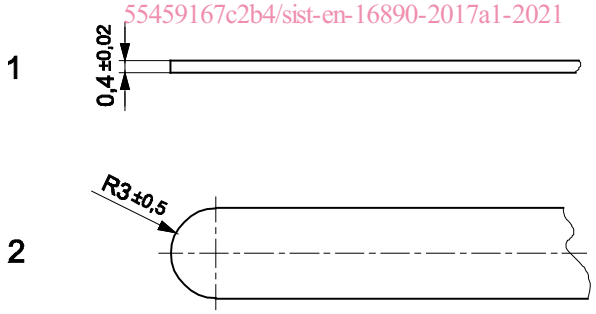

Key

1 side view

2 top view

Figure 4 — Feeler gauge

5.10 Cone

There shall be one cone with an angle of 30° ± 0,5° with a diameter of $60\ ^{0,1}_{0}$ mm with conical ends, see Figure 5.