



SLOVENSKI STANDARD

SIST EN 15430-1:2025

01-februar-2025

Nadomešča:
SIST EN 15430-1:2015

Oprema za vzdrževalna dela zimske službe in službe za vzdrževanje cest - Zajem in prenos podatkov - 1. del: Zajem podatkov v vozilu

Winter and road service area maintenance equipment - Data acquisition and transmission - Part 1: In-vehicle data acquisition

Winterdienst- und Straßenbetriebsdienstausstattung - Datenerfassung und -übertragung - Teil 1: Datenerfassung im Fahrzeug

Matériels de viabilité hivernale et d'entretien des dépendances routières - Acquisition et transmission des données - Partie 1 : Acquisition des données véhiculaires

Ta slovenski standard je istoveten z: EN 15430-1:2024

<https://standards.iteh.ai/catalog/standards/sist/f4118656-a524-498f-b242-038791582c84/sist-en-15430-1-2025>

ICS:

35.240.60	Uporabniške rešitve IT v prometu	IT applications in transport
43.160	Vozila za posebne namene	Special purpose vehicles

SIST EN 15430-1:2025

en,fr,de

EUROPEAN STANDARD

EN 15430-1

NORME EUROPÉENNE

EUROPÄISCHE NORM

December 2024

ICS 35.240.60; 43.160

Supersedes EN 15430-1:2015

English Version

Winter and road service area maintenance equipment - Data acquisition and transmission - Part 1: In-vehicle data acquisition

Matériels de viabilité hivernale et d'entretien des
dépendances routières - Acquisition et transmission
des données - Partie 1 : Acquisition des données
véhiculaires

Winterdienst- und Straßenbetriebsdienstausstattung -
Datenerfassung und -übertragung - Teil 1:
Datenerfassung im Fahrzeug

This European Standard was approved by CEN on 23 September 2024.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and United Kingdom.

<https://standards.tech.ai/catalog/standards/sist/f4118656-a524-498f-b242-038791582c84/sist-en-15430-1-2025>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

Contents	Page
European foreword.....	4
Introduction	5
1 Scope	7
2 Normative references	7
3 Terms and definitions	7
4 Abbreviations	7
5 Communication between vehicle/equipment and board-computer.....	8
5.1 General.....	8
5.2 Communication through RS232	8
5.2.1 RS232 interface on vehicle/equipment “Data transmission handler”	8
5.2.2 RS232 interface on “Board-computer”	8
5.2.3 Communication protocol.....	9
6 Definitions of variables, records and report.....	13
6.1 General.....	13
6.2 Data integrity check	13
6.3 Variable types.....	14
6.4 Recommended SLOTS for variable definitions.....	17
6.5 Definition of variables.....	19
6.5.1 General.....	19
6.5.2 General variables	19
6.5.3 General geographic position system variables	20
6.5.4 General vehicle and route variables	21
6.5.5 General road weather and road condition variables	21
6.5.6 Plough/Broom variables	22
6.5.7 Snow blower or cutter variables	23
6.5.8 Spreader/sprayer variables.....	23
6.5.9 Grass or branch cutting machine variables	26
6.5.10 Sweeper variables.....	27
6.5.11 Safety post cleaning machine variables	27
6.5.12 Boat plants cutter variables	28
6.5.13 Weight system variables.....	28
6.6 Definition of records.....	28
6.6.1 General.....	28
6.6.2 Standard header record (record code 1).....	29
6.6.3 Standard footer record (record code 2).....	29
6.6.4 Trigger conditions for record code 3 and higher	30
6.6.5 Geographic position data record (record code 3)	30
6.6.7 Weather and road condition data record (record code 5).....	32
6.6.8 Snowplough/broom data record (record code 6/7)	34
6.6.9 Spreader/sprayer data record (record code 8)	35
6.6.10 Snow blower/cutter data record (record code 9).....	37
6.6.11 Grass/branch cutter data record (record code 10)	39
6.6.12 Sweeper data record (record code 11)	41
6.6.13 Safety post cleaning machine data record (record code 12).....	42
6.6.14 Boat plants cutter data record (record code 13).....	43
6.6.15 Weight system data record (record code 14)	45
6.6.16 Free definable data record (record code 10000 and higher)	46

6.7 Report definition 47
Bibliography 48

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[SIST EN 15430-1:2025](https://standards.iteh.ai/catalog/standards/sist/f4118656-a524-498f-b242-038791582c84/sist-en-15430-1-2025)

<https://standards.iteh.ai/catalog/standards/sist/f4118656-a524-498f-b242-038791582c84/sist-en-15430-1-2025>

EN 15430-1:2024 (E)**European foreword**

This document (EN 15430-1:2024) has been prepared by Technical Committee CEN/TC 337 "Road operation equipment and products", the secretariat of which is held by AFNOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by June 2025, and conflicting national standards shall be withdrawn at the latest by June 2025.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN 15430-1:2015.

The following changes have been implemented in this new edition:

- Multiple corrections and clarifications;
- Replaced ASCII with extended ASCII, Basic Date notes, correction of typing errors;
- Excluded semicolon from the STRING_X specification;
- Added ManufVersion to the general variables;

NOTE 1 This allows distinguishing between different interpretations of the manufacturer.

- Changed type of GeoAlt to allow negative altitudes;
- Added MaxVehSpd indicating the maximum speed over the last period;

NOTE 2 This allows a more precise interpretation of the spread amount.

- Both SprCntBrineL and SprCntBrineKg are mandatory;

NOTE 3 Both are needed for the data processing systems, but only mandatory one is removed.

- Added Weight system data record;

NOTE 4 Allowing transmission of weight data collected by weighing cells.

- Several corrections on the sweeper variables and the sweeper data record.

Any feedback and questions on this document should be directed to the users' national standards body. A complete listing of these bodies can be found on the CEN website.

According to the CEN-CENELEC Internal Regulations, the national standards organisations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and the United Kingdom.

Introduction

The protocol described in this document is meant to be used for data acquisition in fleet management applications in the field of municipal vehicles. The purpose of the protocol is to define how data of a vehicle or equipment is generated, stored and transferred to a board-computer system in the vehicle and from the board-computer to the software application in the office (refer to Figure 1). On the equipment or vehicle the data is generated by a “Data generator”. This data is stored, if present, into a buffer-memory. The “Data transmission handler” will send the data present in the buffer-memory to the “Board-computer” or “Data Acquisition System”. The buffer-memory is there to ensure that data does not get lost in case there is no transmission possible. The size or type of the buffer is not defined in this proposal. If there is no buffer or the buffer is too small to store new data, data will get lost.

To synchronize time-stamps of the vehicle/equipment with the Board-computer, a special record for time synchronization is defined.

In this part, the data acquisition and communication from vehicle/equipment to the Board-computer is defined.


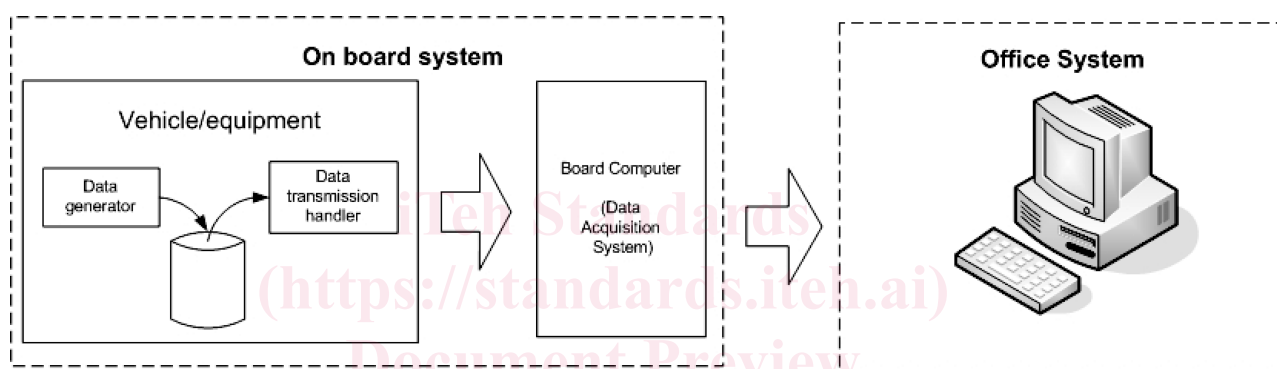


Figure 1 — Architecture


In general, the data is a semi-colon (“;”) separated extended ASCII text for separation of record codes and values of variables. CR+LF is used for separation of records (one record is one line of text).

EN 15430-1:2024 (E)


Examples of an on-board system configuration.

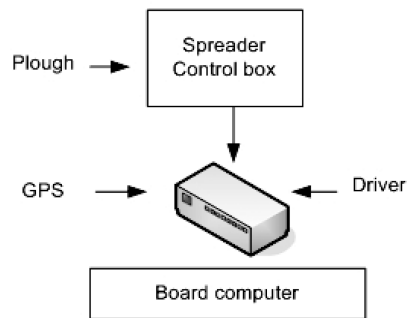


(a) Spreader control box generates spreader and plough data, acquired by board computer;

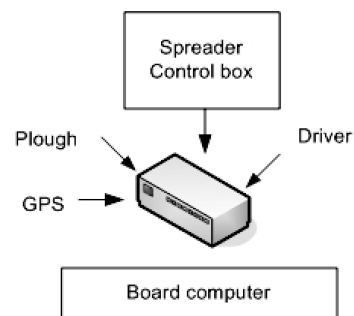

(b) Spreader control box generates spreader data, acquired by board computer; Board computer adds plough, GPS and driver data

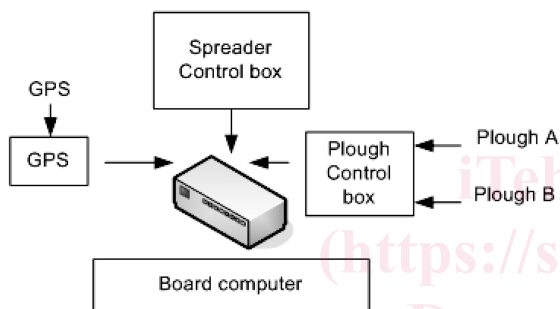

(c) Spreader control box generates spreader data, plough control box generates plough data, GPS box generates GPS data, acquired by board computer

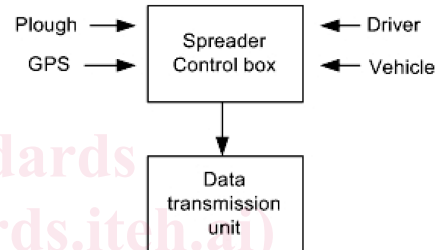

(d) Spreader control box generates spreader, plough, GPS, driver and vehicle data and sends this to the office through the data transmission unit (spreader control box is board computer)

<https://standards.iteh.ai/catalog/standards/sist/f4111656-a524-498f-b242-038791582c84/sist-en-15430-1-2025>

Figure 2 — Diagram of possible connections

1 Scope

This document specifies a protocol for downloading data from the control box of the equipment to an in-vehicle board computer to ensure interchangeability between a vehicle and different equipment that the same vehicle can carry.

It specifies the interface connection as well as variables, records and reports which permit the protocol to cover applications with the greatest possible variety of equipment for performing winter maintenance and road service area maintenance.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 8859-1, *Information technology — 8-bit single-byte coded graphic character sets — Part 1: Latin alphabet No. 1*

NMEA 0183, *Interface Standard*

TIA-232-F, *Interface between data terminal equipment and data circuit-terminating equipment employing serial binary data interchange (RS232)*

SAE J1939/71, *Recommended practice for serial control and communications vehicle network — Vehicle application layer*

3 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at <https://www.iso.org/obp>

— IEC Electropedia: available at <https://www.electropedia.org/>

4 Abbreviations

For the purposes of this document the following abbreviations apply.

ACK	Acknowledge (ASCII control code 06 _h)
ASCII	American national Standard Code for Information Interchange
CRC-16	16-bit Cyclic Redundancy Check
CRC-32	32-bit Cyclic Redundancy Check
CR	Carriage Return (ASCII control code 0D _h)
EOT	End Of Transmission (ASCII control code 04 _h)
h	Number before h is in hexadecimal notation
IEEE	Institute of Electrical and Electronics Engineers
LF	Line Feed (ASCII control code 0A _h)

EN 15430-1:2024 (E)

NAK	Negative acknowledge (ASCII control code 15 _h)
SOH	Start Of Header (ASCII control code 01 _h)
TBD	To Be Defined
↵	CR + LF (carriage return + line feed)

5 Communication between vehicle/equipment and board-computer**5.1 General**

The data exchange between vehicle/equipment “Data transmission handler” and the “Board-computer” shall follow at least one of the communication standards described in the present document version or future release. Until now, only the RS232 standard (TIA-232-F) is defined as a communication standard so that means that at the present a compliant EN 15430 “Data transmission handler” shall supply a RS232 interface, if in the future other standard interfaces will be defined (e.g. CAN BUS, USB ...) a compliant EN 15430 future “Data transmission handler” shall supply at least one of the communication standard until that time is defined.

5.2 Communication through RS232**5.2.1 RS232 interface on vehicle/equipment “Data transmission handler”**

- Connector: SUB-D 9pF (socket)
 - Pin 2 = Transmit Data
 - Pin 3 = Receive Data
 - Pin 5 = Signal Ground
- Baud rate: 1 200 Bit/s...115 200 Bit/s, default 9 600 Bit/s. Rate can be programmable (optional)

The baud rate shall be sufficient for a worst case amount of data to be send with retries.

- Data bits: 8
- Stop bits: 1
- Parity: No
- Data format: according to ISO/IEC 8859-1 (Extended ASCII)
- Handshaking: by software with ACK, NAK ASCII control codes, refer to 5.2.3
- Transmission control by SOH and EOT ASCII control codes, refer to 5.2.3
- Data validity check: CRC-16/CCITT, refer to 5.2.3

5.2.2 RS232 interface on “Board-computer”

- Connector: SUB-D 9pM (pin)
 - Pin 2 = Receive Data
 - Pin 3 = Transmit Data

- Pin 5 = Signal Ground
- Baud rate: 1 200 Bit/s...115 200 Bit/s, default 9 600 Bit/s. Rate shall be programmable or automatically detected (autobaud)
- Data bits: 8
- Stop bits: 1
- Parity: No
- Data format: according to ISO/IEC 8859-1 (Extended ASCII)
- Handshaking: by software with ACK, NAK ASCII control codes, refer to 5.2.3
- Transmission control by SOH and EOT ASCII control codes, refer to 5.2.3
- Data validity check: CRC-16/CCITT, refer to 5.2.3

5.2.3 Communication protocol

5.2.3.1 Transmission of a record

In this definition a message to be communicated consists of one record. Records are terminated by CR+LF (a record is one line of text). In general, a message is sent by the sender (e.g. the “Data transmission handler” of a spreader) and received by the receiver (e.g. the Board-computer). After power up, communication is always started by the vehicle/equipment “Data transmission handler” sending its first message (this is the time synchronization record). Refer to Figures 3 and 4 for more detailed charts of the sender and receiver algorithms.

The receiver will check the validity of a message by testing if the CRC-16 value corresponds to the data in the message received. If the data is valid, the receiver sends an ACK. The sender can now send a new message. If the data is invalid, the receiver sends a NAK. Then, the sender will try to send the same message again for a maximum of 2 times. If the message still fails, the message is considered to be lost. Preferably, a notification is given to the user (operator) that data has been lost by the sender and/or the receiver.

The receiver sends an ACK or a NAK as a single character without other data. The ACK or NAK refers to the latest message sent by the sender. To avoid record synchronization problems between sender and receiver, the sender shall ignore any ACK or NAK received during the transmission of a message until the last byte is sent (EOT character). Also, the receiver is not allowed to send an ACK or NAK during the reception of a message until the last byte is received (EOT character).

Numerical values shall be transmitted with ASCII characters in decimal code.

5.2.3.2 Calculation of the CRC-16 value

The CRC value is calculated according to the CCITT definition. The CRC value is calculated over all record bytes, starting with the record code, ending with CR+LF. The polynomial used is $x^{16} + x^{12} + x^5 + x^0 = 11021_h$ (i.e. XOR mask 1021_h) and initial value FFFF_h.

NOTE The value is written in ASCII characters in hexadecimal code with capitals (0..9,A..F).

EN 15430-1:2024 (E)**5.2.3.3 Calculation of the CRC-32 value**

The CRC-32 value is calculated according to the CCITT definition. The CRC-32 value is calculated over all record bytes, starting with the record code, ending with CR+LF. The polynomial used is $x^{32} + x^{26} + x^{23} + x^{22} + x^{16} + x^{12} + x^{11} + x^{10} + x^8 + x^7 + x^5 + x^4 + x^2 + x + 1$

NOTE The value is written in ASCII characters in hexadecimal code with capitals (0..9,A..F).

5.2.3.4 Sender without receiving options for handshaking

For old vehicle/equipment “Data transmission handlers”, it can be impossible to receive data. In this case the sender cannot respond to an ACK or NAK, i.e. there is no handshaking feature. Hence, the sender will send a new message. This can cause in the result that data gets lost, e.g. in case the Board-computer was not started up yet or if transmission failed. It is up to the user to handle this problem (for example to connect power supply such that power-up is always at the same time for sender and transmitter).

5.2.3.5 Synchronization of communication

To synchronize communication between sender and receiver, a message always starts with an SOH and ends with an EOT. If the receiver is not synchronized yet but the sender is already transmitting a message (e.g. when the Board-computer starts up while the spreader “Data transmission handler” is sending), all data before the first SOH will be ignored. If the receiver is synchronized but detects an SOH before an EOT, the previous, unfinished message is ignored.

5.2.3.6 Time synchronization between sender and receiver

In general, the sender system time and the receiver system time are not equal. To synchronize messages to the system clock of the receiver, a time synchronization record is introduced. This Time Sync record (refer to 6.5.2) contains the actual system time of the sender at the start of record transmission (with a maximum error of $\pm 0,5$ s). The receiver shall record its system time at the moment of reception of a message. In case of the reception of a Time Sync record, the receiver can calculate the difference between its own system clock and the system clock of the sender. Now, the receiver can time-synchronize every message received from the sender and thereby synchronize this data to other data generated by other sources. The board computer shall contain a real time clock which runs even if the board computer has no power. The electronic system on the vehicle/equipment shall have a real time clock which runs even when this system has no power, or, a software clock shall be implemented which starts at date 1-1-2000 and time 00:00:00 and is updated every second.

A Time Sync record, is sent by the sender:

- as the first message starting the communication;
- after 10 s if the receiver does not respond to a message with an ACK or a NAK; after a successful transmission of this record, the latest message before the time synchronization record is transmitted again;
- if the system clock of the sender is adjusted, reset or set to any value which would cause a jump in time.

5.2.3.7 Loss of data

Data will get lost in case of:

- a “Data transmission handler” without handshaking feature which is sending while reliable communication is not possible;
- an overflow of the buffer-memory;

— 2 unsuccessful retransmissions after a NAK.

In case the “Data transmission handler” supports handshaking, the header record shall be the first record of a report.

NOTE The Time Sync record is not part of the report.

Example of a message is shown in graphical form:

Start (1 byte)	Data (codes + values, “;” separated) (x bytes)	CR+LF (2 bytes)	CRC-16 (2 bytes)	End (1 byte)
SOH	1;10;1602048;0461021;5;Abc;Equip1;;	CR LF	66D9	EOT

Extended ASCII characters in hexadecimal notation:

01	31 3B 31 30 3B 31 36 30 32 30 34 38 3B 30 34 36 31 30 32 31 3B 35 3B 41 62 63 3B 45 71 75 69 70 31 3B 3B 3B	0D 0A	36 36 44 39	04
----	---	-------	-------------	----

Communication example:


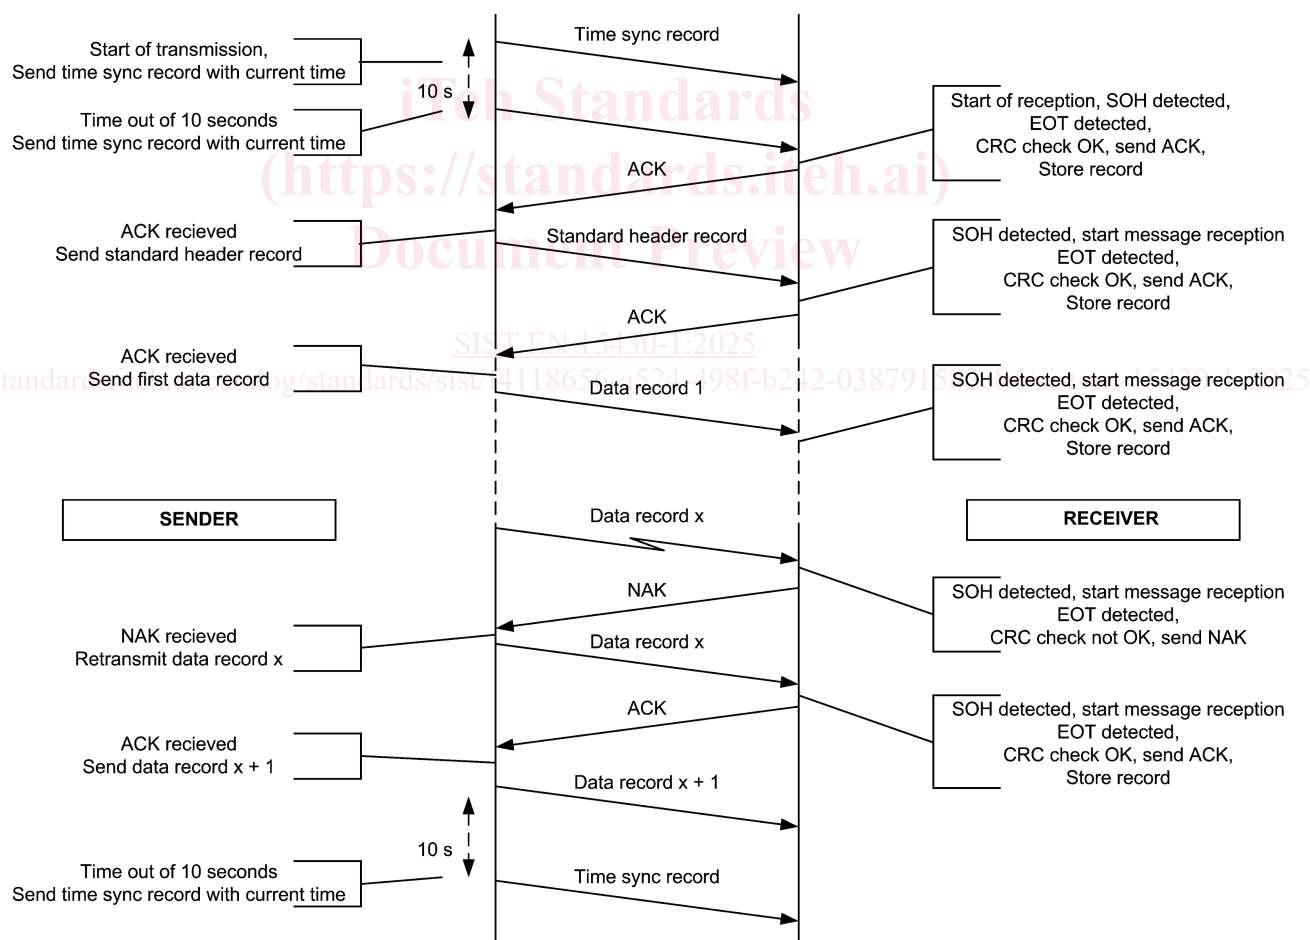


Figure 3 — Flow diagram

EN 15430-1:2024 (E)

Sender algorithm:

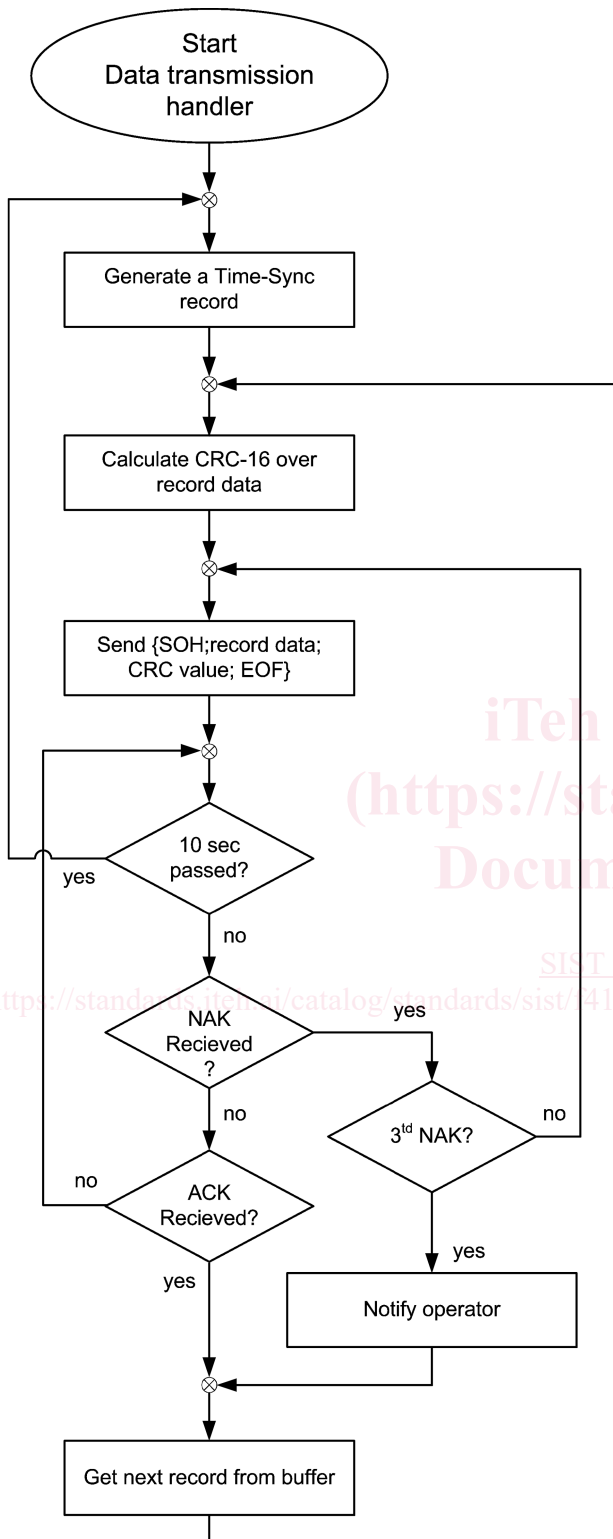

Receiver algorithm:

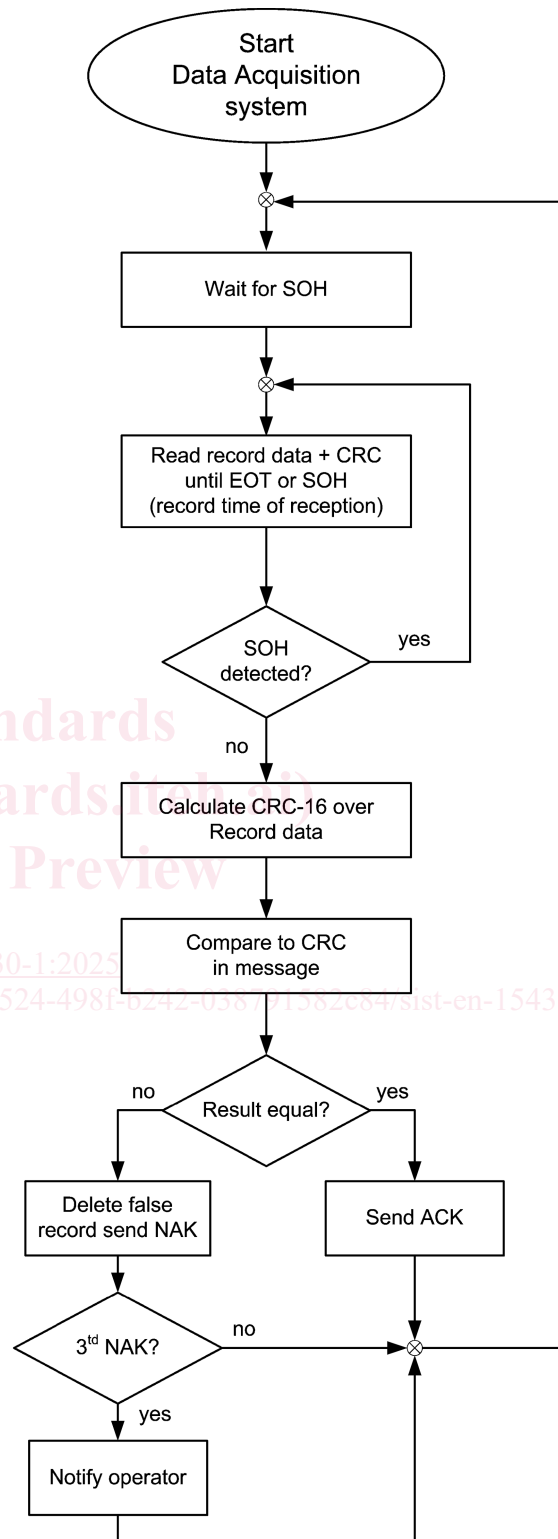


Figure 4 — Flow chart