ISO/TC 21

Secretariat: BSI

Date: 2023-05-10-10

ISO/TC 213

Geometrical product specifications (GPS) — Partition—___

Part 3: Methods used for specification and verification

<u>Spécification géométrique des produits (GPS) — Partition —</u>

Partie 3: Méthodes utilisées pour la spécification et la vérification

(https://standards.iteh.ai)

FDIS stage 5d80-30d4-45b4-8be8

© ISO 2023

1

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office CP 401 • Ch. de Blandonnet 8 CH-1214 Vernier, Geneva Phone: + 41 22 749 01 11 EmailE-mail: copyright@iso.org Website: www.iso.org

Published in Switzerland

iTeh Standards (https://standards.iteh.ai) Document Preview

ISO/FDIS 18183-3

Contents

Forew	ordiv
Introd	luctionv
1	Scope
2	Normative references
3	Terms and definitions1
4	Default partition1
4.1	General
4.2	Default partition surfaces
4.3	Default partition lines4
5	Explicit partition
Annex	A (informative) Additional information about curvature8
Annex	B (informative) Implementations for the default partition
Annex	c C (informative) Relationship to the GPS matrix model24
Biblio	graphy26

iTeh Standards
(https://standards.iteh.ai)
Document Preview

ISO/FDIS 18183-3

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documentsdocument should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawnISO draws attention to the possibility that some of the elementsimplementation of this document may be involve the subjectuse of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 213, Geometrical product specifications and C4 17 dcb46a3/iso-fdis-18183-3 verification, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 290, Geometrical product specification and verification, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

A list of all parts in the ISO 18183 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

This document is a geometrical product specification (GPS) standard and is to be regarded as a general GPS standard (see ISO 14638 14638). It influences chain links B, C and E of all-the chains of standards on size, distance, form, orientation, location and run-out in the GPS matrix model.

The ISO GPS matrix model given in ISO 14638 gives an overview of the ISO GPS system, of which this document is a part. The fundamental rules of ISO GPS given in ISO 801528015 apply to this document and the default decision rules given in ISO 14253-121 apply to specifications made in accordance with this document, unless otherwise indicated.

For more detailed information on the relation of this document to other standards and the GPS matrix model, see Annex CAnnex CAN

This document develops the concepts and methods for default partitioning of skin model (specification) and sampled surface model (verification) along with ISO 18183-411 and ISO 18183-25.2.

iTeh Standards (https://standards.iteh.ai) Document Preview

ISO/FDIS 18183-3

¹ Under preparation. Stage at the time of publication: ISO/FDIS 18183-1:2023.

² Under preparation. Stage at the time of publication: ISO/FDIS 18183-2:2023.

iTeh Standards (https://standards.iteh.ai) Document Preview

ISO/FDIS 18183-3

Geometrical product specifications (GPS) — Partition—__

Part 3:

Methods used for specification and verification

1 Scope

This document specifies the procedure for the partition operation of geometrical product specification and verification.

This document does not apply to profile and areal surface texture.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO $18183-1^3$, Geometrical product specifications (GPS) — Partitioning — Part 1: Terms, definitions and basic concepts

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 18183-1 apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ——ISO Online browsing platform: available at https://www.iso.org/obp
- ——IEC Electropedia: available at https://www.electropedia.org/

4 Default partition


ISO/FDIS 18183-3

4.1tpGeneral_idards.iteh.ai/catalog/standards/sist/c4445d80-30d4-45b4-8be8-2c417dcb46a3/iso-fdis-18183-3

If not otherwise indicated, the default partition shall be that which partitions the skin model (in specification), the nominal model and the samples surface model (in verification) into single features (single surfaces or single lines). See Figure 1-Figure 1-.

For the purposes of this document, a single feature is taken to be of maximum extent. The maximum extent is derived from any combination of length, area, curvature, invariance degree and point set characteristics.

³ Under preparation. Stage at the time of publication: ISO/FDIS 18183-1:2023.

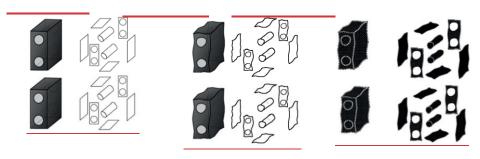

- a) Default partition of nominal model
- b) Default partition of skin model (specification)
- c) Default partition of sampled surface model (verification)


Figure 1 — Default partition

4.2 Default partition surfaces

If not otherwise indicated, the default partition for surfaces shall be that which partitions the surface into single surfaces. For the purposes of this document, a single surface is taken to be the maximum area possible.

A single surface is a connected surface (a <u>surface betweencontinuous region where</u> any two points of which there iscan be connected by a continuous path that does not crossremains entirely within the surface's boundary boundaries where no subset of the considered geometric entity exists with an invariance class not respecting the partial ordering of invariance classes (see <u>Figure 2</u>) and, in the case of a surface of revolute invariance class, where its generatrix is a single line.

A single surface is finite (limited in extent).

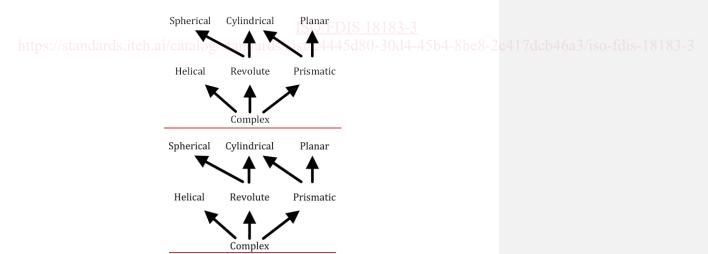


NOTE An upward arrow indicates an increasing freedom in the degree of invariance.

Figure 2 — Partial ordering of the seven invariance classes based on degree of invariance

Where the generatrix intersects the axis of revolution:

- once, each side of the generatrix intersection is considered as a separate single surface (see Figure 3Figure 3);):
- twice or more, the surface between adjacent intersections is considered as a single surface (see Figure 4Figure 4Figure




Key

- 1 generatrix
- 2 axis of revolution
- 3 intersection point
- 4 single cone surface, right side
- 5 single cone surface, left side

NOTE The generatrix intersects the axis once; in this case there exists are two single surfaces.

Figure 3 — Example of a surface of type cone

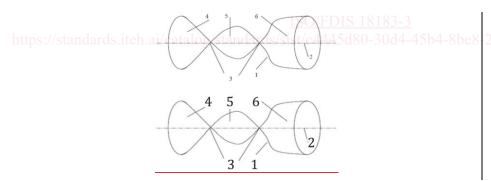

Key

- 1 generatrix
- 2 axis of revolution
- 3 intersection point
- 4 single revolute surface, left side
- 5 single revolute surface, middle
- 6 single revolute surface, right side

NOTE The generatrix intersects the axis twice or more; in this case there exists thressare three single surfaces

Figure 4 — Example of a surface of type revolute


For real surfaces, curvature and slippable motion should be used to determine single surfaces. References to this and other methods can be found in $\underline{\text{Annex AAnnex A}}$ and $\underline{\text{Annex BAnnex B}}$.

4.3 Default partition lines

If not otherwise indicated, the default partition for lines shall be that which partitions the line into single lines. For the purposes of this document, a single line is taken to be the longest line possible.

A single line is a connected line where no subset of the considered geometric entity exists with an invariance class not respecting the partial ordering of invariance classes (see Figure 5-).


A single line is finite (limited in extent).



NOTE An upwards arrow indicates an increasing freedom in the degree of invariance.

Figure 5—__Partial ordering based on degree of invariance

For real lines, the concept of curvature and slippable motion should be used to determine invariant lines and, hence, single lines. In practice, the straight line is a special case of a circle with zero curvature. Figures 6, Figures 6, Figure 8 and Figure 9 to 9 illustrate partitioning of a line into single lines through curvature calculation.

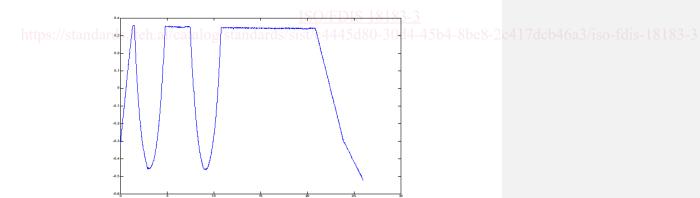

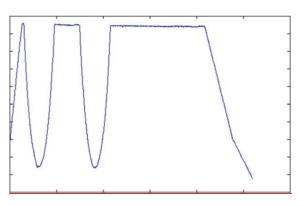


Figure 6 — Original line



https://standards.iteh.ai/catalog/standards/sist/c4445d80-30d4-45b4-8be8-2c417dcb46a3/iso-fdis-18183-3

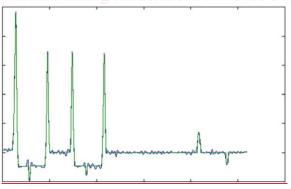


Figure 7 — Calculated curvature from <u>Figure 6</u> partitioned into single lines