



Designation: G173 – 03 (Reapproved2008)

Standard Tables for Reference Solar Spectral Irradiances: Direct Normal and Hemispherical on 37° Tilted Surface¹

This standard is issued under the fixed designation G173; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

INTRODUCTION

A wide variety of solar spectral energy distributions occur in the natural environment and are simulated by artificial sources during product, material, or component testing. To compare the relative optical performance of spectrally sensitive products a reference standard solar spectral distribution is required. These tables replace ASTM standard G159, which has been withdrawn. The solar spectral energy distribution presented in this standard are not intended as a benchmark for ultraviolet radiation in weathering exposure testing of materials. The spectra are based on version 2.9.2 of the Simple Model of the Atmospheric Radiative Transfer of Sunshine (SMARTS) atmospheric transmission code (1,2).² SMARTS uses empirical parameterizations of version 4.0 of the Air Force Geophysical Laboratory (AFGL) Moderate Resolution Transmission model, MODTRAN (3,4) for some gaseous absorption processes, and recent spectroscopic data for others. An extraterrestrial spectrum differing only slightly from the extraterrestrial spectrum in Tables E490 is used to calculate the resultant spectra (5). The hemispherical tilted spectrum is similar to the hemispherical spectrum in use since 1987, but differs from it because: (1) the wavelength range for the current spectrum has been extended deeper into the ultraviolet; (2) uniform wavelength intervals are now used; (3) more representative atmospheric conditions are represented; and (4) SMARTS Version 2.9.2 has been used as the generating model. For the same reasons, and particularly the adoption of a remarkably less turbid atmosphere than before, significant differences exist in the reference direct normal spectrum compared to previous versions of this standard. The input parameters used in conjunction with SMARTS for the selected atmospheric conditions are tabulated. The SMARTS model and documentation are available as an adjunct (ADJG173CD³) to this standard. 3-03(2008)

<https://standards.iteh.ai/catalog/standards/sist/536bb71a-ad76-47fb-a035-53d9fc32e36a/astm-g173-032008>

1. Scope

1.1 These tables contain terrestrial solar spectral irradiance distributions for use in terrestrial applications that require a standard reference spectral irradiance for hemispherical solar irradiance (consisting of both direct and diffuse components) incident on a sun-facing, 37° tilted surface or the direct normal spectral irradiance. The data contained in these tables reflect reference spectra with uniform wavelength interval (0.5 nanometer (nm) below 400 nm, 1 nm between 400 and 1700 nm, an intermediate wavelength at 1702 nm, and 5 nm intervals from

1705 to 4000 nm). The data tables represent reasonable cloudless atmospheric conditions favorable for photovoltaic (PV) energy production, as well as weathering and durability exposure applications.

1.2 The 37° slope of the sun-facing tilted surface was chosen to represent the average latitude of the 48 contiguous United States. A wide variety of orientations is possible for exposed surfaces. The availability of the SMARTS model (as an adjunct, ADJG173CD³) to this standard) used to generate the standard spectra allows users to evaluate differences relative to the surface specified here.

1.3 The air mass and atmospheric extinction parameters are chosen to provide (1) historical continuity with respect to previous standard spectra, (2) reasonable cloudless atmospheric conditions favorable for photovoltaic (PV) energy production or weathering and durability exposure, based upon modern broadband solar radiation data, atmospheric profiles, and improved knowledge of aerosol optical depth profiles. In nature, an extremely large range of atmospheric conditions can

¹ These tables are under the jurisdiction of ASTM Committee G03 on Weathering and Durability and is the direct responsibility of Subcommittee G03.09 on Radiometry.

Current edition approved June 1, 2008. Published October 2008. Originally approved in 2003. Last previous edition approved in 2003 as G173-03^{e1}. DOI: 10.1520/G0173-03R08.

² The boldface numbers in parentheses refer to the list of references at the end of this standard.

³ Available from ASTM International Headquarters. Order Adjunct No. ADJG173CD. Original adjunct produced in 2005.

be encountered even under cloudless skies. Considerable departure from the reference spectra may be observed depending on time of day, geographical location, and changing atmospheric conditions. The availability of the SMARTS model (as an adjunct (ADJG173CD³) to this standard) used to generate the standard spectra allows users to evaluate spectral differences relative to the spectra specified here.

2. Referenced Documents

2.1 *ASTM Standards*:⁴

E490 Standard Solar Constant and Zero Air Mass Solar Spectral Irradiance Tables

E772 Terminology of Solar Energy Conversion

2.2 *ASTM Adjunct*:³

ADJG173CD Simple Model for Atmospheric Transmission of Sunshine

3. Terminology

3.1 *Definitions*—Definitions of most terms used in this specification may be found in Terminology **E772**.

3.2 *Definitions*: The following definition differs from that in Terminology **E772**, representing information current as of this revision.

3.2.1 *solar constant*—the total solar irradiance at normal incidence on a surface in free space at the earth's mean distance from the sun. (1 astronomical unit, or AU = 1.496 × 10¹¹ m).

3.2.1.1 *Discussion*—The solar constant is now known within about ±1.5 W·m⁻². Its current accepted values are 1366.1 W·m⁻² (Tables **E490**) or 1367.0 W·m⁻² (World Meteorological Organization, WMO), and are subject to change. Due to the eccentricity of the earth's orbit, the actual extraterrestrial solar irradiance varies by ±3.4 % about the solar constant as the earth-sun distance varies through the year. Throughout this standard the solar constant is defined as 1367.0 W·m⁻².

3.3 *Definitions of Terms Specific to This Standard*:

3.3.1 *aerosol optical depth (AOD)*—the wavelength-dependent total extinction (scattering and absorption) by aerosols in the atmosphere. This optical depth (also called “optical thickness”) is defined here at 500 nm.

3.3.1.1 *Discussion*—See **Appendix X1**.

3.3.2 *air mass zero (AM0)*—describes solar radiation quantities outside the Earth's atmosphere at the mean Earth-Sun distance (1 Astronomical Unit). See Tables **E490**.

3.3.3 *integrated irradiance* $E_{\lambda_1-\lambda_2}$ —spectral irradiance integrated over a specific wavelength interval from λ_1 to λ_2 , measured in W·m⁻²; mathematically:

$$E_{\lambda_1-\lambda_2} = \int_{\lambda_1}^{\lambda_2} E_{\lambda} d\lambda \quad (1)$$

3.3.4 *solar irradiance, hemispherical* E_H —on a given plane, the solar radiant flux received from within the 2 π steradian field of view of a tilted plane from the portion of the sky dome

and the foreground included in the plane's field of view, including both diffuse and direct solar radiation.

3.3.4.1 *Discussion*—For the special condition of a horizontal plane the hemispherical solar irradiance is properly termed global solar irradiance, E_G . Incorrectly, global tilted, or total global irradiance is often used to indicate hemispherical irradiance for a tilted plane. In case of a sun-tracking receiver, this hemispherical irradiance is commonly called global normal irradiance. The adjective global should refer only to hemispherical solar radiation on a horizontal, not a tilted, surface.

3.3.5 *solar irradiance, spectral* E_{λ} —solar irradiance E per unit wavelength interval at a given wavelength λ (unit: Watts per square meter per nanometer, W·m⁻²·nm⁻¹):

$$E_{\lambda} = \frac{dE}{d\lambda} \quad (2)$$

3.3.6 *spectral interval*—the distance in wavelength units between adjacent spectral irradiance data points.

3.3.7 *spectral passband*—the effective wavelength interval within which spectral irradiance is allowed to pass, as through a filter or monochromator. The convolution integral of the spectral passband (normalized to unity at maximum) and the incident spectral irradiance produces the effective transmitted irradiance.

3.3.7.1 *Discussion*—Spectral passband may also be referred to as the spectral bandwidth of a filter or device. Passbands are usually specified as the interval between wavelengths at which one half of the maximum transmission of the filter or device occurs, or as full-width at half-maximum, FWHM.

3.3.8 *spectral resolution*—the minimum wavelength difference between two wavelengths that can be identified unambiguously.

3.3.8.1 *Discussion*—In the context of this standard, the spectral resolution is simply the interval, $\Delta\lambda$, between spectral data points, or the *spectral interval*.

3.3.9 *total ozone*—the depth of a column of pure ozone equivalent to the total of the ozone in a vertical column from the ground to the top of the atmosphere (unit: atmosphere-cm or atm-cm).

3.3.10 *total precipitable water*—the depth of a column of water (with a section of 1 cm²) equivalent to the condensed water vapor in a vertical column from the ground to the top of the atmosphere (unit: cm or g/cm²).

3.3.11 *wavenumber*—a unit of frequency, ν , in units of reciprocal centimeters (symbol cm⁻¹) commonly used in place of wavelength, λ (units of length, typically nanometers). To convert wavenumber to nanometers, $\lambda \text{ nm} = 1 \cdot 10^7 / \nu \text{ cm}^{-1}$. See **X1.2**.

4. Significance and Use

4.1 Absorptance, reflectance, and transmittance of solar energy are important factors in material degradation studies, solar thermal system performance, solar photovoltaic system performance, biological studies, and solar simulation activities. These optical properties are normally functions of wavelength, which require the spectral distribution of the solar flux be

⁴ For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

known before the solar-weighted property can be calculated. To compare the relative performance of competitive products, or to compare the performance of products before and after being subjected to weathering or other exposure conditions, a reference standard solar spectral distribution is desirable.

4.2 These tables provide appropriate standard spectral irradiance distributions for determining the relative optical performance of materials, solar thermal, solar photovoltaic, and other systems. The tables may be used to evaluate components and materials for the purpose of solar simulation where either the direct or the hemispherical (that is, direct beam plus diffuse sky) spectral solar irradiance is desired. However, these tables are not intended to be used as a benchmark for ultraviolet radiation used in indoor exposure testing of materials using manufactured light sources.

4.3 The total integrated irradiances for the direct and hemispherical tilted spectra are $900.1 \text{ W}\cdot\text{m}^{-2}$ and $1000.4 \text{ W}\cdot\text{m}^{-2}$, respectively. Note that, in PV applications, no amplitude adjustments are required to match standard reporting condition irradiances of $1000 \text{ W}\cdot\text{m}^{-2}$ for hemispherical irradiance.

4.4 Previously defined global hemispherical reference spectrum (G159) for a sun-facing 37° -tilted surface served well to meet the needs of the flat plate photovoltaic research, development, and industrial community. Investigation of prevailing conditions and measured spectra shows that this global hemispherical reference spectrum can be attained in practice under a variety of conditions, and that these conditions can be interpreted as representative for many combinations of atmo-

spheric parameters. Earlier global hemispherical reference spectrum may be closely, but not exactly, reproduced with improved spectral wavelength range, uniform spectral interval, and spectral resolution equivalent to the spectral interval, using inputs in X1.4.

4.5 Reference spectra generated by the SMARTS Version 2.9.2 model for the indicated conditions are shown in Fig. 1. The exact input file structure required to generate the reference spectra is shown in Table 1.

4.6 The availability of the adjunct (ADJG173CD³) standard computer software for SMARTS allows one to (1) reproduce the reference spectra, using the above input parameters; (2) compute test spectra to attempt to match measured data at a specified FWHM, and evaluate atmospheric conditions; and (3) compute test spectra representing specific conditions for analysis vis-à-vis any one or all of the reference spectra.

4.7 Differences from the previous standard spectra (G159) can be summarized as follows:

4.7.1 Extended spectral interval in the ultraviolet (down to 280 nm, rather than 305 nm),

4.7.2 Better resolution (2002 wavelengths, as compared to 120),

4.7.3 Constant intervals (0.5 nm below 400 nm, 1 nm between 400 and 1700 nm, and 5 nm above),

4.7.4 Better definition of atmospheric scattering and gaseous absorption, with more species considered,

4.7.5 Better defined extraterrestrial spectrum,

4.7.6 More realistic spectral ground reflectance, and

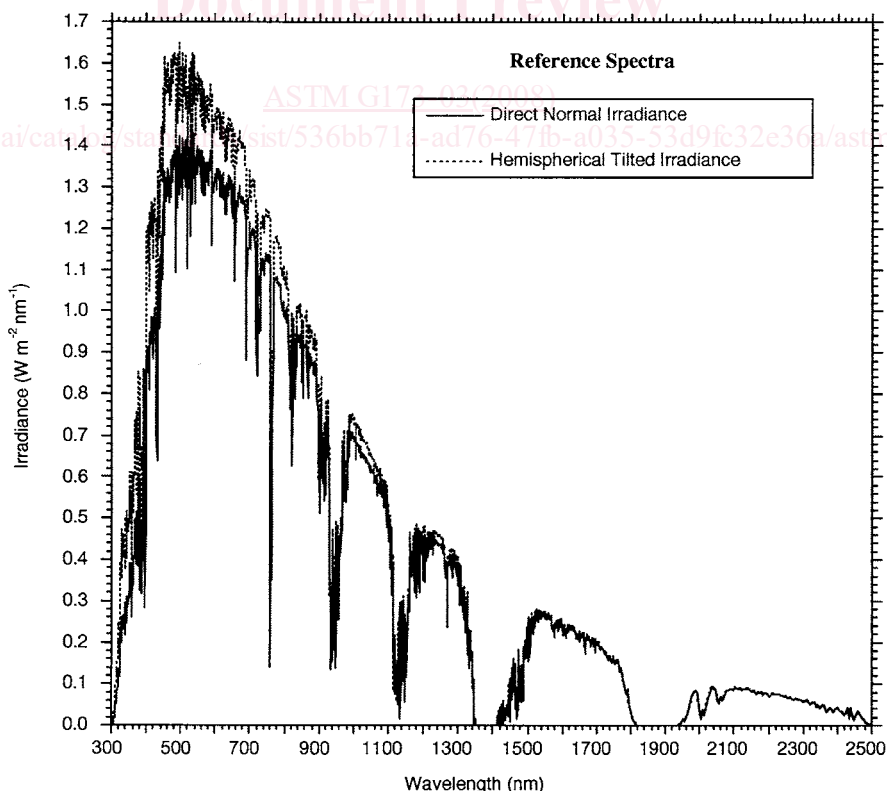


FIG. 1 Plot of Direct Normal Spectral Irradiance (Solid Line) and Hemispherical Spectral Irradiance on 37° Tilted Sun-Facing Surface (Dotted Line) Computed Using Smarts Version 2.9.2 Model With Input File in Table 1

TABLE 1 SMARTS Version 2.9.2 Input File to Generate the Reference Spectra

Card ID	Value	Parameter/Description/Variable Name
1	'ASTM_G 173_Std_Spectra'	Header
2	1	Pressure input mode (1 = pressure and altitude): ISPR
2a	1013.25 0.	Station Pressure (mb) and altitude (km): SPR, ALT
3	1	Standard Atmosphere Profile Selection (1 = use default atmosphere): IATM1
3a	'USSA'	Default Standard Atmosphere Profile: ATM
4	1	Water Vapor Input (1 = default from Atmospheric Profile): IH2O
5	1	Ozone Calculation (1 = default from Atmospheric Profile): IO3
6	1	Pollution level mode (1 = standard conditions/no pollution): IGAS (see X1.3)
7	370	Carbon Dioxide volume mixing ratio (ppm): qCO2 (see X1.3)
7a	1	Extraterrestrial Spectrum (1 = SMARTS/Gueymard): ISPCTR
8	'S&F_RURAL'	Aerosol Profile to Use: AEROS
9	0	Specification for aerosol optical depth/turbidity input (0 = AOD at 500 nm): ITURB
9a	0.084	Aerosol Optical Depth at 500 nm: TAU5
10	38	Far field Spectral Albedo file to use (38= Light Sandy Soil): IALBDX
10b	1	Specify tilt calculation (1 = yes): ITILT
10c	38 37 180	Albedo and Tilt variables-Albedo file to use for near field, Tilt, and Azimuth: IALBDG, TILT, WAZIM
11	280 4000 1.0 1367.0	Wavelength Range-start, stop, mean radius vector correction, integrated solar spectrum irradiance: WLMN, WLMX, SUNCOR, SOLARC
12	2	Separate spectral output file print mode (2 = yes): IPRT
12a	280 4000 .5	Output file wavelength-Print limits, start, stop, minimum step size: WPMN, WPMX, INTVL
12b	2	Number of output variables to print: IOTOT
12c	8 9	Code relating output variables to print (8 = Hemispherical tilt, 9 = direct normal + circumsolar): OUT(8), OUT(9)
13	1	Circumsolar calculation mode (1 = yes): ICIRC
13a	0 2.9 0	Receiver geometry-Slope, View, Limit half angles: SLOPE, APERT, LIMIT
14	0	Smooth function mode (0 = none): ISCAN
15	0	Illuminance calculation mode (0 = none): ILLUM
16	0	UV calculation mode (0 = none): IUV
17	2	Solar Geometry mode (2 = Air Mass): IMASS
17a	1.5	Air mass value: AMASS

4.7.7 Lower aerosol optical depth, yielding significantly larger direct normal irradiance.

5. Technical Bases for the Tables

5.1 These tables are modeled data generated using an air mass zero (AM0) spectrum based in part on the extraterrestrial spectrum of Kurucz (5), the 1976 U.S. Standard Atmosphere (6), the Shettle and Fenn Rural Aerosol Profile (7), the SMARTS radiative transfer code, version 2.9.2, and associated input data files.

5.2 In order to provide spectral data with a uniform spectral step size and improved spectral resolution, the AM0 spectrum used in conjunction with SMARTS to generate the terrestrial spectrum is slightly different from the ASTM extraterrestrial spectrum, Standard E490. Because Standard E490 and SMARTS both use the Kurucz data, the SMARTS and Tables E490 spectra are in good agreement though they do not have the same spectral interval step sizes, spectral interval centers, or spectral resolution.

5.3 The 1976 U.S. Standard Atmosphere (USSA) is used to provide documented atmospheric properties and concentrations of absorbers. However, some newly documented (and relatively minor) absorbers are taken into consideration in the present standard spectra. See X1.3.

5.4 The SMARTS model code and documentation is available from the NREL (National Renewable Energy Lab) website (www.nrel.gov).

5.5 These terrestrial solar spectral data are based on the work of Gueymard (1,2) and Gueymard et al. (8). Previously

defined reference spectra were based on the work of Bird, Hulstrom, and Lewis (9). The current spectra reflect current (as of 2002) improved knowledge of gaseous absorption, atmospheric aerosol optical properties, transmission properties, and radiative transfer modeling.

5.6 The terrestrial solar spectra in the tables have been computed with a spectral resolution equivalent to that of the wavelength interval. Parameterizations in the SMARTS2 model are based on high resolution (2 cm⁻¹) MODTRAN (2,3,10,11) results subsequently “degraded” or smoothed to the SMARTS2 model wavelength interval.

5.6.1 *Discussion*—This approach emulates the procedure of measuring spectral data with a monochromator by using the wavelength interval equivalent to the spectral passband of the instrument.

5.7 To represent favorable conditions for PV energy production and exposure conditions for weathering and durability testing, sites in the National Solar Radiation Data Base (13) with annual daily average direct normal solar radiation exceeding 6 kWh·m⁻² (or 21.6 MJ·m⁻²) per day were analyzed. The mean aerosol optical depth at 500 nm for these sites was determined to be 0.085. A very slightly smaller AOD of 0.084 results in a hemispherical tilted spectrum integrating to 1000.4 W/m², nearly exactly the irradiance used in photovoltaic standard reporting conditions. See X1.2.

5.8 Previous reference spectra were generated using a wavelength-independent albedo of 0.2. The present standards utilize measured wavelength-dependent reflectance data, representing light sandy soil of the southwest U.S. See Fig. X1.1.

5.9 The direct normal spectrum includes the circumsolar spectral irradiance that would be measured with a collimated spectroradiometer or pyrheliometer with a 5.8° field of view (aperture half-angle of 2.9°) representing common commercially available radiometers.

5.10 The profile for the United States Standard Atmosphere of 1976 results in a carbon dioxide volume mixing ratio of 330 ppm. It's current (2001) measured value is about 370 ppm. The latter is the value used in the computation of the reference spectra, as noted in Table 1.

5.11 The selected air mass value of 1.5 for a plane parallel atmosphere above a flat earth corresponds to a zenith angle of 48.19°. The SMARTS2 computation of air mass accounts for atmospheric curvature and the vertical density profile of molecules, which results in a solar zenith angle of 48.236°, or an equivalent plane parallel atmosphere air mass of 1.50136. The angle of incidence computed by SMARTS2 for the direct beam irradiance incident on a 37°-tilted plane facing the sun is thus 11.236°.

6. Solar Spectral Irradiance

6.1 Table 2 presents the reference spectral irradiance data for direct normal spectral irradiance within a 5.8° field of view

centered on the sun; and hemispherical spectral solar irradiance on a plane tilted at 37° toward the sun, for the conditions specified in Table 1.

6.2 The spectral table contains:

6.2.1 Direct normal spectral irradiance in the wavelength range 280 to 4000 nm.

6.2.2 Hemispherical solar spectral irradiance incident on an sun-facing plane tilted to 37° from the horizontal in the wavelength range 280 to 4000 nm.

6.2.3 Data in the tables relate to the absolute air mass of 1.5. The direct irradiance contains a circumsolar component for a field of view of 5.8° centered on the sun.

6.2.4 The columns in each table contain:

6.2.4.1 Columns 1, 4, 7: wavelength in nanometers (nm).

6.2.4.2 Columns 2, 5, 8: mean hemispherical spectral irradiance incident on surface tilted 37° toward the sun. E_{λ} in Watts per square meter per nanometer, $W \cdot m^{-2} \cdot nm^{-1}$.

6.2.4.3 Columns 3, 6, 9: mean direct spectral irradiance within 5.8° field of view incident on surface normal to the sun rays. E_{λ} in Watts per square meter per nanometer, $W \cdot m^{-2} \cdot nm^{-1}$.

6.3 Fig. 1 is a plot of the direct normal and hemispherical spectral irradiance from the data in Table 2.

TABLE 2 Standard Air Mass 1.5 Direct Normal and Hemispherical Spectral Solar Irradiance for 37° Sun-Facing Tilted Surface

Wavelength, nm	Hemispherical Tilt Irrad, $W \cdot m^{-2} \cdot nm^{-1}$	Direct + Circumsolar, $W \cdot m^{-2} \cdot nm^{-1}$	Wavelength, nm	Hemispherical Tilt Irrad, $W \cdot m^{-2} \cdot nm^{-1}$	Direct + Circumsolar, $W \cdot m^{-2} \cdot nm^{-1}$	Wavelength, nm	Hemispherical Tilt Irrad, $W \cdot m^{-2} \cdot nm^{-1}$	Direct + Circumsolar, $W \cdot m^{-2} \cdot nm^{-1}$
280.0	4.73E-23	2.54E-26	316.0	0.1235	0.0671	352.0	0.5179	0.3267
280.5	1.23E-21	1.09E-24	316.5	0.1504	0.0811	352.5	0.4896	0.3095
281.0	5.69E-21	6.13E-24	317.0	0.1716	0.0930	353.0	0.5204	0.3298
281.5	1.57E-19	2.75E-22	317.5	0.1825	0.0997	353.5	0.5723	0.3635
282.0	1.19E-18	2.83E-21	318.0	0.1759	0.0958	354.0	0.6050	0.3852
282.5	4.54E-18	1.33E-20	318.5	0.1859	0.1001	354.5	0.6116	0.3904
283.0	1.85E-17	6.76E-20	319.0	0.2047	0.1097	355.0	0.6114	0.3914
283.5	3.54E-17	1.46E-19	319.5	0.1959	0.1069	355.5	0.5903	0.3788
284.0	7.27E-16	4.98E-18	320.0	0.2053	0.1128	356.0	0.5539	0.3563
284.5	2.49E-15	2.16E-17	320.5	0.2453	0.1331	356.5	0.5194	0.3350
285.0	8.01E-15	9.00E-17	321.0	0.2502	0.1341	357.0	0.4567	0.2953
285.5	4.26E-14	6.44E-16	321.5	0.2384	0.1282	357.5	0.4622	0.2995
286.0	1.37E-13	2.35E-15	322.0	0.2220	0.1220	358.0	0.4301	0.2794
286.5	8.38E-13	1.85E-14	322.5	0.2171	0.1197	358.5	0.3993	0.2600
287.0	2.74E-12	7.25E-14	323.0	0.2123	0.1162	359.0	0.4695	0.3065
287.5	1.09E-11	3.66E-13	323.5	0.2486	0.1339	359.5	0.5655	0.3701
288.0	6.23E-11	2.81E-12	324.0	0.2754	0.1485	360.0	0.5982	0.3924
288.5	1.72E-10	9.07E-12	324.5	0.2832	0.1547	360.5	0.5653	0.3717
289.0	5.63E-10	3.50E-11	325.0	0.2789	0.1550	361.0	0.5202	0.3428
289.5	2.07E-09	1.54E-10	325.5	0.3244	0.1794	361.5	0.5096	0.3365
290.0	6.02E-09	5.15E-10	326.0	0.3812	0.2087	362.0	0.5342	0.3535
290.5	1.38E-08	1.33E-09	326.5	0.4072	0.2216	362.5	0.5851	0.3880
291.0	3.51E-08	3.90E-09	327.0	0.3981	0.2183	363.0	0.6019	0.4001
291.5	1.09E-07	1.44E-08	327.5	0.3847	0.2129	363.5	0.5854	0.3899
292.0	2.68E-07	4.08E-08	328.0	0.3512	0.1977	364.0	0.6063	0.4047
292.5	4.27E-07	7.04E-08	328.5	0.3716	0.2068	364.5	0.6006	0.4018
293.0	8.65E-07	1.58E-07	329.0	0.4224	0.2330	365.0	0.6236	0.4181
293.5	2.27E-06	4.71E-07	329.5	0.4688	0.2586	365.5	0.6863	0.4611
294.0	4.17E-06	9.46E-07	330.0	0.4714	0.2619	366.0	0.7353	0.4951
294.5	6.59E-06	1.60E-06	330.5	0.4280	0.2410	366.5	0.7366	0.4969
295.0	1.23E-05	3.22E-06	331.0	0.4026	0.2284	367.0	0.7229	0.4887
295.5	2.78E-05	8.02E-06	331.5	0.4181	0.2364	367.5	0.7091	0.4804
296.0	4.79E-05	1.47E-05	332.0	0.4362	0.2451	368.0	0.6676	0.4532
296.5	7.13E-05	2.33E-05	332.5	0.4392	0.2466	368.5	0.6631	0.4511
297.0	9.68E-05	3.32E-05	333.0	0.4294	0.2426	369.0	0.6932	0.4724
297.5	1.86E-04	6.79E-05	333.5	0.4072	0.2327	369.5	0.7447	0.5086
298.0	2.90E-04	1.11E-04	334.0	0.4150	0.2382	370.0	0.7551	0.5167
298.5	3.58E-04	1.43E-04	334.5	0.4451	0.2543	370.5	0.6826	0.4680
299.0	4.92E-04	2.03E-04	335.0	0.4639	0.2648	371.0	0.6934	0.4763
299.5	8.61E-04	3.74E-04	335.5	0.4531	0.2589	371.5	0.7205	0.4959
300.0	0.0010	0.0005	336.0	0.4152	0.2381	372.0	0.6744	0.4651



TABLE 2 Continued

Wavelength, nm	Hemispherical Tilt Irrad, W.m ⁻² .nm ⁻¹	Direct + Circumsolar, W.m ⁻² .nm ⁻¹	Wavelength, nm	Hemispherical Tilt Irrad, W.m ⁻² .nm ⁻¹	Direct + Circumsolar, W.m ⁻² .nm ⁻¹	Wavelength, nm	Hemispherical Tilt Irrad, W.m ⁻² .nm ⁻¹	Direct + Circumsolar, W.m ⁻² .nm ⁻¹
300.5	0.0012	0.0006	336.5	0.3821	0.2210	372.5	0.6425	0.4439
301.0	0.0019	0.0009	337.0	0.3738	0.2177	373.0	0.6189	0.4283
301.5	0.0027	0.0013	337.5	0.4005	0.2343	373.5	0.5579	0.3868
302.0	0.0029	0.0015	338.0	0.4341	0.2532	374.0	0.5564	0.3865
302.5	0.0043	0.0022	338.5	0.4553	0.2655	374.5	0.5523	0.3844
303.0	0.0071	0.0037	339.0	0.4636	0.2710	375.0	0.5893	0.4109
303.5	0.0090	0.0048	339.5	0.4745	0.2785	375.5	0.6516	0.4551
304.0	0.0095	0.0051	340.0	0.5018	0.2966	376.0	0.6748	0.4722
304.5	0.0120	0.0065	340.5	0.5007	0.2967	376.5	0.6639	0.4654
305.0	0.0165	0.0089	341.0	0.4714	0.2793	377.0	0.7123	0.5001
305.5	0.0187	0.0102	341.5	0.4694	0.2785	377.5	0.7946	0.5589
306.0	0.0186	0.0102	342.0	0.4893	0.2912	378.0	0.8560	0.6031
306.5	0.0211	0.0116	342.5	0.5077	0.3030	378.5	0.8342	0.5889
307.0	0.0278	0.0152	343.0	0.5149	0.3086	379.0	0.7439	0.5262
307.5	0.0356	0.0195	343.5	0.4861	0.2925	379.5	0.6668	0.4726
308.0	0.0378	0.0208	344.0	0.4184	0.2535	380.0	0.7008	0.4975
308.5	0.0414	0.0228	344.5	0.4031	0.2444	380.5	0.7508	0.5340
309.0	0.0405	0.0223	345.0	0.4590	0.2785	381.0	0.7638	0.5442
309.5	0.0433	0.0237	345.5	0.4893	0.2976	381.5	0.6884	0.4914
310.0	0.0509	0.0278	346.0	0.4778	0.2913	382.0	0.5868	0.4196
310.5	0.0655	0.0359	346.5	0.4866	0.2975	382.5	0.5076	0.3636
311.0	0.0829	0.0454	347.0	0.4940	0.3032	383.0	0.4550	0.3265
311.5	0.0841	0.0462	347.5	0.4767	0.2935	383.5	0.4405	0.3166
312.0	0.0934	0.0509	348.0	0.4751	0.2931	384.0	0.5097	0.3669
312.5	0.0990	0.0538	348.5	0.4834	0.2988	384.5	0.6136	0.4424
313.0	0.1073	0.0583	349.0	0.4656	0.2886	385.0	0.6736	0.4864
313.5	0.1076	0.0590	349.5	0.4781	0.2972	385.5	0.6436	0.4655
314.0	0.1197	0.0653	350.0	0.5280	0.3291	386.0	0.6210	0.4498
314.5	0.1306	0.0705	350.5	0.5674	0.3547	386.5	0.6457	0.4685
315.0	0.1363	0.0737	351.0	0.5517	0.3460	387.0	0.6515	0.4734
315.5	0.1184	0.0648	351.5	0.5302	0.3339	387.5	0.6420	0.4673
388.0	0.6358	0.4635	448.0	1.5081	1.2422	520.0	1.5236	1.3349
388.5	0.6314	0.4610	449.0	1.5045	1.2409	521.0	1.5346	1.3452
389.0	0.6854	0.5012	450.0	1.5595	1.2881	522.0	1.5690	1.3760
389.5	0.7597	0.5564	451.0	1.6173	1.3376	523.0	1.4789	1.2976
390.0	0.7970	0.5846	452.0	1.5482	1.2822	524.0	1.5905	1.3962
390.5	0.8037	0.5904	453.0	1.4297	1.1854	525.0	1.5781	1.3859
391.0	0.8514	0.6263	454.0	1.5335	1.2730	526.0	1.5341	1.3479
391.5	0.8634	0.6362	455.0	1.5224	1.2655	527.0	1.3417	1.1795
392.0	0.7949	0.5866	456.0	1.5724	1.3088	528.0	1.5357	1.3508
392.5	0.6626	0.4896	457.0	1.5854	1.3213	529.0	1.6071	1.4142
393.0	0.4798	0.3550	458.0	1.5514	1.2946	530.0	1.5446	1.3598
393.5	0.3815	0.2827	459.0	1.5391	1.2859	531.0	1.6292	1.4348
394.0	0.4957	0.3678	460.0	1.5291	1.2791	532.0	1.5998	1.4094
394.5	0.6839	0.5081	461.0	1.5827	1.3255	533.0	1.4286	1.2590
395.0	0.8077	0.6010	462.0	1.5975	1.3392	534.0	1.5302	1.3491
395.5	0.8604	0.6410	463.0	1.6031	1.3452	535.0	1.5535	1.3701
396.0	0.7566	0.5644	464.0	1.5544	1.3055	536.0	1.6199	1.4292
396.5	0.5502	0.4110	465.0	1.5350	1.2905	537.0	1.4989	1.3229
397.0	0.4262	0.3188	466.0	1.5673	1.3190	538.0	1.5738	1.3896
397.5	0.6295	0.4715	467.0	1.4973	1.2616	539.0	1.5352	1.3558
398.0	0.8525	0.6394	468.0	1.5619	1.3178	540.0	1.4825	1.3096
398.5	1.0069	0.7562	469.0	1.5682	1.3247	541.0	1.4251	1.2595
399.0	1.0693	0.8041	470.0	1.5077	1.2749	542.0	1.5511	1.3714
399.5	1.1021	0.8298	471.0	1.5331	1.2975	543.0	1.5256	1.3493
400.0	1.1141	0.8399	472.0	1.6126	1.3661	544.0	1.5792	1.3971
401.0	1.1603	0.8769	473.0	1.5499	1.3144	545.0	1.5435	1.3657
402.0	1.2061	0.9139	474.0	1.5671	1.3304	546.0	1.5291	1.3536
403.0	1.1613	0.8821	475.0	1.6185	1.3755	547.0	1.5490	1.3717
404.0	1.1801	0.8985	476.0	1.5631	1.3299	548.0	1.5049	1.3331
405.0	1.1511	0.8785	477.0	1.5724	1.3392	549.0	1.5520	1.3752
406.0	1.1227	0.8588	478.0	1.6230	1.3839	550.0	1.5399	1.3648
407.0	1.1026	0.8455	479.0	1.5916	1.3586	551.0	1.5382	1.3639
408.0	1.1514	0.8849	480.0	1.6181	1.3825	552.0	1.5697	1.3923
409.0	1.2299	0.9472	481.0	1.6177	1.3836	553.0	1.5250	1.3533
410.0	1.0485	0.8091	482.0	1.6236	1.3899	554.0	1.5549	1.3802
411.0	1.1738	0.9077	483.0	1.6038	1.3742	555.0	1.5634	1.3883
412.0	1.2478	0.9669	484.0	1.5734	1.3492	556.0	1.5366	1.3651
413.0	1.1971	0.9295	485.0	1.5683	1.3457	557.0	1.4988	1.3321
414.0	1.1842	0.9213	486.0	1.2716	1.0918	558.0	1.5310	1.3613
415.0	1.2258	0.9557	487.0	1.4241	1.2235	559.0	1.4483	1.2885
416.0	1.2624	0.9863	488.0	1.5413	1.3252	560.0	1.4740	1.3118
417.0	1.2312	0.9639	489.0	1.4519	1.2492	561.0	1.5595	1.3885

TABLE 2 *Continued*

Wavelength, nm	Hemispherical Tilt Irrad, W.m ⁻² .nm ⁻¹	Direct + Circumsolar, W.m ⁻² .nm ⁻¹	Wavelength, nm	Hemispherical Tilt Irrad, W.m ⁻² .nm ⁻¹	Direct + Circumsolar, W.m ⁻² .nm ⁻¹	Wavelength, nm	Hemispherical Tilt Irrad, W.m ⁻² .nm ⁻¹	Direct + Circumsolar, W.m ⁻² .nm ⁻¹
418.0	1.1777	0.9239	490.0	1.6224	1.3968	562.0	1.4847	1.3225
419.0	1.2258	0.9635	491.0	1.5595	1.3435	563.0	1.5408	1.3731
420.0	1.1232	0.8847	492.0	1.4869	1.2818	564.0	1.5106	1.3466
421.0	1.2757	1.0067	493.0	1.5903	1.3719	565.0	1.5201	1.3555
422.0	1.2583	0.9950	494.0	1.5525	1.3402	566.0	1.4374	1.2823
423.0	1.2184	0.9653	495.0	1.6485	1.4238	567.0	1.5320	1.3673
424.0	1.2117	0.9618	496.0	1.5676	1.3548	568.0	1.5180	1.3554
425.0	1.2488	0.9931	497.0	1.5944	1.3788	569.0	1.4807	1.3228
426.0	1.2135	0.9667	498.0	1.5509	1.3421	570.0	1.4816	1.3240
427.0	1.1724	0.9355	499.0	1.5507	1.3429	571.0	1.4331	1.2810
428.0	1.1839	0.9463	500.0	1.5451	1.3391	572.0	1.5134	1.3534
429.0	1.0963	0.8777	501.0	1.4978	1.2990	573.0	1.5198	1.3595
430.0	0.8746	0.7013	502.0	1.4966	1.2991	574.0	1.5119	1.3527
431.0	0.7939	0.6378	503.0	1.5653	1.3597	575.0	1.4777	1.3225
432.0	1.3207	1.0628	504.0	1.4587	1.2682	576.0	1.4654	1.3118
433.0	1.2288	0.9905	505.0	1.5635	1.3598	577.0	1.5023	1.3452
434.0	1.1352	0.9165	506.0	1.6264	1.4153	578.0	1.4560	1.3040
435.0	1.2452	1.0070	507.0	1.5560	1.3548	579.0	1.4770	1.3230
436.0	1.3659	1.1061	508.0	1.5165	1.3210	580.0	1.5020	1.3455
437.0	1.3943	1.1306	509.0	1.5893	1.3850	581.0	1.5089	1.3518
438.0	1.2238	0.9937	510.0	1.5481	1.3497	582.0	1.5320	1.3729
439.0	1.1775	0.9575	511.0	1.5769	1.3753	583.0	1.5479	1.3872
440.0	1.3499	1.0993	512.0	1.6186	1.4125	584.0	1.5448	1.3845
441.0	1.3313	1.0859	513.0	1.5206	1.3277	585.0	1.5324	1.3737
442.0	1.4250	1.1640	514.0	1.4885	1.3003	586.0	1.4953	1.3409
443.0	1.4453	1.1823	515.0	1.5314	1.3385	587.0	1.5281	1.3708
444.0	1.4084	1.1537	516.0	1.5455	1.3514	588.0	1.4934	1.3403
445.0	1.4619	1.1992	517.0	1.2594	1.1017	589.0	1.2894	1.1582
446.0	1.3108	1.0766	518.0	1.4403	1.2605	590.0	1.3709	1.2316
447.0	1.4903	1.2257	519.0	1.3957	1.2222	591.0	1.4662	1.3171
448.0	1.4354	1.2900	520.0	1.3967	1.2647	592.0	1.2059	1.0994
449.0	1.4561	1.3086	521.0	1.4214	1.2871	593.0	1.2039	1.0978
450.0	1.4491	1.3029	522.0	1.4203	1.2860	594.0	1.2269	1.1184
451.0	1.4308	1.2870	523.0	1.4102	1.2767	595.0	1.1905	1.0855
452.0	1.4745	1.3260	524.0	1.4150	1.2810	596.0	1.2195	1.1119
453.0	1.4788	1.3303	525.0	1.4394	1.3032	597.0	1.2148	1.1078
454.0	1.4607	1.3142	526.0	1.4196	1.2853	598.0	1.2153	1.1084
455.0	1.4606	1.3145	527.0	1.4169	1.2829	599.0	1.2405	1.1316
456.0	1.4753	1.3278	528.0	1.3972	1.2651	600.0	1.2503	1.1408
457.0	1.4579	1.3123	529.0	1.4094	1.2760	601.0	1.2497	1.1404
458.0	1.4360	1.2928	530.0	1.4074	1.2742	602.0	1.2470	1.1381
459.0	1.4664	1.3205	531.0	1.3958	1.2639	603.0	1.2477	1.1389
460.0	1.4921	1.3439	532.0	1.4120	1.2786	604.0	1.2401	1.1323
461.0	1.4895	1.3418	533.0	1.3991	1.2669	605.0	1.2357	1.1286
462.0	1.4822	1.3353	534.0	1.4066	1.2737	606.0	1.2341	1.1273
463.0	1.4911	1.3434	535.0	1.3947	1.2629	607.0	1.2286	1.1224
464.0	1.4862	1.3392	536.0	1.3969	1.2650	608.0	1.2330	1.1265
465.0	1.4749	1.3292	537.0	1.3915	1.2601	609.0	1.2266	1.1210
466.0	1.4686	1.3237	538.0	1.3981	1.2662	610.0	1.2420	1.1353
467.0	1.4611	1.3170	539.0	1.3830	1.2526	611.0	1.2383	1.1321
468.0	1.4831	1.3370	540.0	1.3739	1.2445	612.0	1.2232	1.1185
469.0	1.4621	1.3182	541.0	1.3748	1.2454	613.0	1.2221	1.1176
470.0	1.4176	1.2783	542.0	1.3438	1.2174	614.0	1.2295	1.1246
471.0	1.4697	1.3254	543.0	0.9682	0.8829	615.0	1.1945	1.0932
472.0	1.4310	1.2906	544.0	1.1206	1.0195	616.0	0.2660	0.2472
473.0	1.4128	1.2744	545.0	1.1278	1.0260	617.0	0.1540	0.1433
474.0	1.4664	1.3228	546.0	1.1821	1.0746	618.0	0.6877	0.6349
475.0	1.4733	1.3292	547.0	1.2333	1.1201	619.0	0.3795	0.3522
476.0	1.4739	1.3299	548.0	1.2689	1.1516	620.0	0.5388	0.4989
477.0	1.4802	1.3359	549.0	1.2609	1.1446	621.0	0.6860	0.6338
478.0	1.4269	1.2882	550.0	1.2464	1.1318	622.0	0.8146	0.7508
479.0	1.4165	1.2793	551.0	1.2714	1.1538	623.0	0.9742	0.8957
480.0	1.4118	1.2751	552.0	1.2684	1.1513	624.0	1.1138	1.0222
481.0	1.4026	1.2667	553.0	1.3403	1.2151	625.0	1.1278	1.0347
482.0	1.4012	1.2655	554.0	1.3192	1.1961	626.0	1.1608	1.0646
483.0	1.4417	1.3022	555.0	1.2918	1.1721	627.0	1.1686	1.0716
484.0	1.3631	1.2328	556.0	1.2823	1.1636	628.0	1.1778	1.0802
485.0	1.4114	1.2758	557.0	1.2659	1.1489	629.0	1.1771	1.0797
486.0	1.3924	1.2589	558.0	1.2674	1.1500	630.0	1.1771	1.0800
487.0	1.4161	1.2799	559.0	1.2747	1.1567	631.0	1.1771	1.0801
488.0	1.3638	1.2327	560.0	1.3078	1.1864	632.0	1.1798	1.0827
489.0	1.4508	1.3110	561.0	1.3214	1.1989	633.0	1.1727	1.0764
490.0	1.4284	1.2907	562.0	1.3144	1.1925	634.0	1.1713	1.0754



TABLE 2 Continued

Wavelength, nm	Hemispherical Tilt Irrad, W.m ⁻² .nm ⁻¹	Direct + Circumsolar, W.m ⁻² .nm ⁻¹	Wavelength, nm	Hemispherical Tilt Irrad, W.m ⁻² .nm ⁻¹	Direct + Circumsolar, W.m ⁻² .nm ⁻¹	Wavelength, nm	Hemispherical Tilt Irrad, W.m ⁻² .nm ⁻¹	Direct + Circumsolar, W.m ⁻² .nm ⁻¹
635.0	1.4458	1.3065	707.0	1.3090	1.1875	779.0	1.1765	1.0803
636.0	1.4128	1.2768	708.0	1.3048	1.1839	780.0	1.1636	1.0687
637.0	1.4610	1.3204	709.0	1.3095	1.1880	781.0	1.1607	1.0662
638.0	1.4707	1.3292	710.0	1.3175	1.1954	782.0	1.1662	1.0714
639.0	1.4646	1.3238	711.0	1.3155	1.1934	783.0	1.1614	1.0672
640.0	1.4340	1.2962	712.0	1.3071	1.1856	784.0	1.1536	1.0602
641.0	1.4348	1.2970	713.0	1.2918	1.1719	785.0	1.1586	1.0649
642.0	1.4376	1.2995	714.0	1.3029	1.1823	786.0	1.1592	1.0656
643.0	1.4525	1.3130	715.0	1.2587	1.1428	787.0	1.1450	1.0530
644.0	1.4462	1.3074	716.0	1.2716	1.1548	788.0	1.1305	1.0399
645.0	1.4567	1.3170	717.0	1.1071	1.0081	789.0	1.1257	1.0359
646.0	1.4150	1.2797	718.0	1.0296	0.9387	790.0	1.0910	1.0045
647.0	1.4086	1.2744	719.0	0.9232	0.8427	791.0	1.1058	1.0179
648.0	1.3952	1.2625	720.0	0.9855	0.8994	792.0	1.0953	1.0084
649.0	1.3519	1.2234	721.0	1.0861	0.9897	793.0	1.0875	1.0015
650.0	1.3594	1.2299	722.0	1.2407	1.1281	794.0	1.0972	1.0101
651.0	1.4447	1.3071	723.0	1.1444	1.0423	795.0	1.0932	1.0066
652.0	1.3871	1.2558	724.0	1.0555	0.9631	796.0	1.0742	0.9899
653.0	1.4311	1.2950	725.0	1.0380	0.9474	797.0	1.0913	1.0057
654.0	1.4153	1.2807	726.0	1.0813	0.9864	798.0	1.1121	1.0245
655.0	1.3499	1.2220	727.0	1.0850	0.9899	799.0	1.0905	1.0048
656.0	1.1851	1.0727	728.0	1.0400	0.9497	800.0	1.0725	0.9886
657.0	1.2393	1.1218	729.0	1.0466	0.9550	801.0	1.0843	0.9998
658.0	1.3855	1.2540	730.0	1.1285	1.0294	802.0	1.0856	1.0011
659.0	1.3905	1.2586	731.0	1.0703	0.9770	803.0	1.0657	0.9829
660.0	1.3992	1.2668	732.0	1.1534	1.0520	804.0	1.0782	0.9945
661.0	1.3933	1.2618	733.0	1.1962	1.0901	805.0	1.0545	0.9727
662.0	1.3819	1.2518	734.0	1.2357	1.1261	806.0	1.0974	1.0122
663.0	1.3844	1.2539	735.0	1.2178	1.1101	807.0	1.0859	1.0018
808.0	1.0821	0.9984	880.0	0.9396	0.8743	952.0	0.2689	0.2542
809.0	1.0548	0.9735	881.0	0.9086	0.8456	953.0	0.3436	0.3244
810.0	1.0559	0.9749	882.0	0.9325	0.8679	954.0	0.4241	0.3999
811.0	1.0533	0.9727	883.0	0.9293	0.8649	955.0	0.3412	0.3220
812.0	1.0268	0.9488	884.0	0.9331	0.8686	956.0	0.3282	0.3100
813.0	1.0086	0.9324	885.0	0.9442	0.8791	957.0	0.2707	0.2559
814.0	0.9036	0.8368	886.0	0.9075	0.8452	958.0	0.4610	0.4345
815.0	0.8952	0.8293	887.0	0.9106	0.8480	959.0	0.3739	0.3529
816.0	0.8322	0.7717	888.0	0.9223	0.8590	960.0	0.4207	0.3969
817.0	0.8518	0.7898	889.0	0.9346	0.8704	961.0	0.4612	0.4348
818.0	0.8226	0.7630	890.0	0.9239	0.8608	962.0	0.4417	0.4166
819.0	0.9052	0.8384	891.0	0.9258	0.8626	963.0	0.5050	0.4759
820.0	0.8619	0.7990	892.0	0.9088	0.8469	964.0	0.4586	0.4324
821.0	0.9976	0.9229	893.0	0.8733	0.8141	965.0	0.5037	0.4747
822.0	0.9516	0.8808	894.0	0.8513	0.7941	966.0	0.5028	0.4738
823.0	0.6727	0.6258	895.0	0.8136	0.7596	967.0	0.5024	0.4735
824.0	0.9351	0.8662	896.0	0.7625	0.7127	968.0	0.6521	0.6130
825.0	0.9694	0.8975	897.0	0.6657	0.6231	969.0	0.6862	0.6448
826.0	0.9338	0.8653	898.0	0.7178	0.6714	970.0	0.6346	0.5969
827.0	0.9847	0.9118	899.0	0.5487	0.5146	971.0	0.7140	0.6706
828.0	0.8498	0.7887	900.0	0.7426	0.6943	972.0	0.6877	0.6463
829.0	0.9293	0.8614	901.0	0.5993	0.5616	973.0	0.6065	0.5708
830.0	0.9160	0.8493	902.0	0.6679	0.6250	974.0	0.5753	0.5417
831.0	0.9239	0.8567	903.0	0.6889	0.6448	975.0	0.5899	0.5554
832.0	0.8943	0.8296	904.0	0.8446	0.7886	976.0	0.5719	0.5387
833.0	0.9565	0.8862	905.0	0.8171	0.7634	977.0	0.6386	0.6008
834.0	0.9341	0.8661	906.0	0.7756	0.7250	978.0	0.6151	0.5790
835.0	1.0032	0.9292	907.0	0.6385	0.5983	979.0	0.6382	0.6005
836.0	0.9723	0.9014	908.0	0.6522	0.6109	980.0	0.6047	0.5694
837.0	1.0092	0.9349	909.0	0.7043	0.6591	981.0	0.7134	0.6706
838.0	0.9990	0.9259	910.0	0.6247	0.5855	982.0	0.6922	0.6510
839.0	1.0013	0.9278	911.0	0.6681	0.6258	983.0	0.6687	0.6292
840.0	1.0157	0.9412	912.0	0.6889	0.6451	984.0	0.7373	0.6929
841.0	1.0101	0.9363	913.0	0.6283	0.5891	985.0	0.6882	0.6473
842.0	0.9970	0.9241	914.0	0.6265	0.5874	986.0	0.7508	0.7055
843.0	1.0053	0.9317	915.0	0.6784	0.6355	987.0	0.7393	0.6949
844.0	0.9863	0.9143	916.0	0.5765	0.5410	988.0	0.7346	0.6906
845.0	1.0165	0.9423	917.0	0.7302	0.6835	989.0	0.7491	0.7039
846.0	1.0187	0.9445	918.0	0.5927	0.5561	990.0	0.7323	0.6884
847.0	0.9917	0.9195	919.0	0.7388	0.6916	991.0	0.7536	0.7083
848.0	0.9922	0.9201	920.0	0.7441	0.6966	992.0	0.7510	0.7060
849.0	0.9860	0.9145	921.0	0.7805	0.7300	993.0	0.7373	0.6933
850.0	0.8937	0.8290	922.0	0.7003	0.6558	994.0	0.7541	0.7089
851.0	0.9749	0.9045	923.0	0.7450	0.6970	995.0	0.7518	0.7067



TABLE 2 Continued

Wavelength, nm	Hemispherical Tilt Irrad, W.m ⁻² .nm ⁻¹	Direct + Circumsolar, W.m ⁻² .nm ⁻¹	Wavelength, nm	Hemispherical Tilt Irrad, W.m ⁻² .nm ⁻¹	Direct + Circumsolar, W.m ⁻² .nm ⁻¹	Wavelength, nm	Hemispherical Tilt Irrad, W.m ⁻² .nm ⁻¹	Direct + Circumsolar, W.m ⁻² .nm ⁻¹
852.0	0.9693	0.8994	924.0	0.7215	0.6757	996.0	0.7488	0.7041
853.0	0.9649	0.8954	925.0	0.7111	0.6662	997.0	0.7397	0.6956
854.0	0.8511	0.7900	926.0	0.7033	0.6588	998.0	0.7389	0.6948
855.0	0.9130	0.8475	927.0	0.7874	0.7368	999.0	0.7386	0.6946
856.0	0.9732	0.9034	928.0	0.5897	0.5536	1000.0	0.7353	0.6916
857.0	0.9917	0.9206	929.0	0.5513	0.5179	1001.0	0.7444	0.7001
858.0	0.9920	0.9209	930.0	0.4321	0.4068	1002.0	0.7281	0.6850
859.0	0.9917	0.9208	931.0	0.4092	0.3854	1003.0	0.7344	0.6909
860.0	0.9882	0.9176	932.0	0.3009	0.2839	1004.0	0.7234	0.6806
861.0	0.9868	0.9165	933.0	0.2484	0.2346	1005.0	0.6817	0.6414
862.0	0.9945	0.9237	934.0	0.1438	0.1360	1006.0	0.7125	0.6705
863.0	1.0005	0.9293	935.0	0.2508	0.2369	1007.0	0.7275	0.6846
864.0	0.9792	0.9096	936.0	0.1614	0.1527	1008.0	0.7269	0.6841
865.0	0.9632	0.8949	937.0	0.1634	0.1545	1009.0	0.7197	0.6774
866.0	0.8490	0.7888	938.0	0.2006	0.1896	1010.0	0.7191	0.6770
867.0	0.9155	0.8507	939.0	0.3989	0.3759	1011.0	0.7228	0.6803
868.0	0.9592	0.8914	940.0	0.4718	0.4441	1012.0	0.7188	0.6767
869.0	0.9496	0.8825	941.0	0.3720	0.3507	1013.0	0.7176	0.6756
870.0	0.9676	0.8993	942.0	0.4053	0.3819	1014.0	0.7207	0.6785
871.0	0.9539	0.8867	943.0	0.2783	0.2629	1015.0	0.7082	0.6668
872.0	0.9669	0.8989	944.0	0.2858	0.2699	1016.0	0.7113	0.6698
873.0	0.9572	0.8900	945.0	0.3682	0.3473	1017.0	0.7034	0.6624
874.0	0.9404	0.8745	946.0	0.1946	0.1841	1018.0	0.7142	0.6726
875.0	0.9269	0.8620	947.0	0.3711	0.3501	1019.0	0.6888	0.6488
876.0	0.9528	0.8863	948.0	0.2742	0.2591	1020.0	0.6990	0.6584
877.0	0.9562	0.8895	949.0	0.4940	0.4651	1021.0	0.7018	0.6611
878.0	0.9524	0.8861	950.0	0.1473	0.1394	1022.0	0.6897	0.6498
879.0	0.9366	0.8714	951.0	0.4838	0.4556	1023.0	0.6951	0.6549
1024.0	0.6906	0.6508	1096.0	0.5032	0.4773	1168.0	0.4195	0.4002
1025.0	0.6975	0.6573	1097.0	0.5785	0.5481	1169.0	0.4231	0.4035
1026.0	0.6964	0.6563	1098.0	0.5029	0.4771	1170.0	0.4587	0.4373
1027.0	0.6931	0.6532	1099.0	0.5077	0.4816	1171.0	0.4483	0.4275
1028.0	0.6939	0.6540	1100.0	0.4858	0.4611	1172.0	0.4548	0.4337
1029.0	0.6863	0.6469	1101.0	0.4970	0.4717	1173.0	0.4564	0.4352
1030.0	0.6906	0.6509	1102.0	0.4688	0.4451	1174.0	0.3369	0.3219
1031.0	0.6874	0.6480	1103.0	0.4664	0.4429	1175.0	0.4524	0.4314
1032.0	0.6879	0.6485	1104.0	0.4677	0.4441	1176.0	0.4768	0.4545
1033.0	0.6761	0.6375	1105.0	0.5064	0.4807	1177.0	0.4724	0.4504
1034.0	0.6802	0.6414	1106.0	0.3979	0.3784	1178.0	0.3600	0.3439
1035.0	0.6823	0.6435	1107.0	0.4830	0.4587	1179.0	0.4837	0.4611
1036.0	0.6820	0.6432	1108.0	0.4157	0.3952	1180.0	0.4407	0.4205
1037.0	0.6750	0.6366	1109.0	0.4128	0.3925	1181.0	0.4551	0.4342
1038.0	0.6717	0.6336	1110.0	0.4790	0.4550	1182.0	0.3232	0.3090
1039.0	0.6764	0.6380	1111.0	0.3315	0.3157	1183.0	0.4387	0.4185
1040.0	0.6717	0.6337	1112.0	0.4136	0.3933	1184.0	0.4199	0.4008
1041.0	0.6718	0.6338	1113.0	0.2685	0.2560	1185.0	0.4074	0.3891
1042.0	0.6720	0.6341	1114.0	0.2999	0.2858	1186.0	0.4772	0.4552
1043.0	0.6653	0.6277	1115.0	0.2499	0.2383	1187.0	0.4558	0.4349
1044.0	0.6683	0.6307	1116.0	0.2014	0.1922	1188.0	0.3350	0.3204
1045.0	0.6645	0.6271	1117.0	0.0796	0.0762	1189.0	0.4157	0.3969
1046.0	0.6471	0.6108	1118.0	0.2175	0.2076	1190.0	0.4624	0.4412
1047.0	0.6569	0.6201	1119.0	0.1132	0.1082	1191.0	0.4466	0.4264
1048.0	0.6627	0.6256	1120.0	0.1419	0.1356	1192.0	0.4734	0.4517
1049.0	0.6590	0.6221	1121.0	0.1859	0.1775	1193.0	0.4543	0.4337
1050.0	0.6546	0.6180	1122.0	0.0817	0.0782	1194.0	0.4689	0.4475
1051.0	0.6552	0.6186	1123.0	0.1282	0.1226	1195.0	0.4470	0.4267
1052.0	0.6512	0.6149	1124.0	0.1087	0.1040	1196.0	0.4313	0.4119
1053.0	0.6492	0.6130	1125.0	0.1443	0.1379	1197.0	0.4772	0.4553
1054.0	0.6465	0.6105	1126.0	0.0516	0.0494	1198.0	0.4339	0.4143
1055.0	0.6485	0.6124	1127.0	0.1573	0.1503	1199.0	0.3649	0.3487
1056.0	0.6464	0.6106	1128.0	0.0992	0.0949	1200.0	0.4483	0.4279
1057.0	0.6448	0.6091	1129.0	0.1059	0.1013	1201.0	0.4371	0.4174
1058.0	0.6382	0.6029	1130.0	0.0706	0.0676	1202.0	0.4372	0.4174
1059.0	0.6188	0.5845	1131.0	0.2956	0.2820	1203.0	0.4341	0.4144
1060.0	0.6359	0.6007	1132.0	0.2341	0.2236	1204.0	0.3625	0.3465
1061.0	0.6212	0.5869	1133.0	0.1533	0.1466	1205.0	0.4369	0.4171
1062.0	0.6327	0.5978	1134.0	0.0417	0.0400	1206.0	0.4809	0.4587
1063.0	0.6224	0.5882	1135.0	0.0155	0.0148	1207.0	0.4299	0.4104
1064.0	0.6320	0.5972	1136.0	0.1288	0.1232	1208.0	0.4335	0.4138
1065.0	0.6291	0.5946	1137.0	0.2879	0.2747	1209.0	0.4143	0.3955
1066.0	0.6171	0.5833	1138.0	0.2033	0.1943	1210.0	0.4534	0.4327
1067.0	0.6203	0.5864	1139.0	0.2985	0.2848	1211.0	0.4223	0.4032
1068.0	0.6194	0.5856	1140.0	0.2560	0.2445	1212.0	0.4249	0.4057



TABLE 2 Continued

Wavelength, nm	Hemispherical Tilt Irrad, W.m ⁻² .nm ⁻¹	Direct + Circumsolar, W.m ⁻² .nm ⁻¹	Wavelength, nm	Hemispherical Tilt Irrad, W.m ⁻² .nm ⁻¹	Direct + Circumsolar, W.m ⁻² .nm ⁻¹	Wavelength, nm	Hemispherical Tilt Irrad, W.m ⁻² .nm ⁻¹	Direct + Circumsolar, W.m ⁻² .nm ⁻¹
1069.0	0.5863	0.5543	1141.0	0.1934	0.1849	1213.0	0.4696	0.4480
1070.0	0.6047	0.5718	1142.0	0.2248	0.2148	1214.0	0.4341	0.4144
1071.0	0.6166	0.5830	1143.0	0.3118	0.2976	1215.0	0.4278	0.4085
1072.0	0.6154	0.5819	1144.0	0.1133	0.1084	1216.0	0.4664	0.4451
1073.0	0.6036	0.5709	1145.0	0.1460	0.1398	1217.0	0.4553	0.4346
1074.0	0.6216	0.5878	1146.0	0.1576	0.1509	1218.0	0.4593	0.4384
1075.0	0.5925	0.5605	1147.0	0.0592	0.0567	1219.0	0.4466	0.4264
1076.0	0.6147	0.5814	1148.0	0.2711	0.2590	1220.0	0.4581	0.4372
1077.0	0.6043	0.5718	1149.0	0.2185	0.2089	1221.0	0.4653	0.4441
1078.0	0.6032	0.5708	1150.0	0.1216	0.1165	1222.0	0.4514	0.4310
1079.0	0.6047	0.5721	1151.0	0.2034	0.1945	1223.0	0.4441	0.4240
1080.0	0.5972	0.5652	1152.0	0.2476	0.2367	1224.0	0.4481	0.4279
1081.0	0.5808	0.5497	1153.0	0.2381	0.2276	1225.0	0.4624	0.4414
1082.0	0.5894	0.5577	1154.0	0.1425	0.1364	1226.0	0.4682	0.4470
1083.0	0.5981	0.5660	1155.0	0.3132	0.2990	1227.0	0.4330	0.4136
1084.0	0.5785	0.5478	1156.0	0.2809	0.2684	1228.0	0.4666	0.4454
1085.0	0.5933	0.5616	1157.0	0.3146	0.3004	1229.0	0.4672	0.4461
1086.0	0.5541	0.5250	1158.0	0.3117	0.2977	1230.0	0.4600	0.4393
1087.0	0.5670	0.5369	1159.0	0.3369	0.3216	1231.0	0.4720	0.4507
1088.0	0.5932	0.5616	1160.0	0.2865	0.2737	1232.0	0.4663	0.4453
1089.0	0.5792	0.5486	1161.0	0.3475	0.3317	1233.0	0.4540	0.4336
1090.0	0.5557	0.5266	1162.0	0.3500	0.3341	1234.0	0.4702	0.4489
1091.0	0.5884	0.5572	1163.0	0.4686	0.4464	1235.0	0.4650	0.4441
1092.0	0.5812	0.5505	1164.0	0.4019	0.3833	1236.0	0.4691	0.4480
1093.0	0.5106	0.4842	1165.0	0.3886	0.3708	1237.0	0.4634	0.4426
1094.0	0.5397	0.5112	1166.0	0.3749	0.3578	1238.0	0.4680	0.4469
1095.0	0.5207	0.4936	1167.0	0.4100	0.3911	1239.0	0.4627	0.4419
1240.0	0.4608	0.4401	1312.0	0.3334	0.3199	1384.0	0.0000	0.0000
1241.0	0.4620	0.4413	1313.0	0.3135	0.3009	1385.0	0.0000	0.0000
1242.0	0.4625	0.4418	1314.0	0.2883	0.2769	1386.0	0.0000	0.0000
1243.0	0.4575	0.4371	1315.0	0.2858	0.2745	1387.0	0.0002	0.0002
1244.0	0.4553	0.4350	1316.0	0.3242	0.3111	1388.0	0.0000	0.0000
1245.0	0.4566	0.4362	1317.0	0.3122	0.2997	1389.0	0.0006	0.0006
1246.0	0.4595	0.4390	1318.0	0.3333	0.3198	1390.0	0.0005	0.0005
1247.0	0.4575	0.4372	1319.0	0.2686	0.2580	1391.0	0.0003	0.0003
1248.0	0.4586	0.4383	1320.0	0.2587	0.2486	1392.0	0.0000	0.0000
1249.0	0.4597	0.4393	1321.0	0.2987	0.2868	1393.0	0.0001	0.0001
1250.0	0.4571	0.4368	1322.0	0.3022	0.2902	1394.0	0.0001	0.0001
1251.0	0.4526	0.4326	1323.0	0.2328	0.2239	1395.0	0.0000	0.0000
1252.0	0.4510	0.4311	1324.0	0.2625	0.2523	1396.0	0.0000	0.0000
1253.0	0.4477	0.4280	1325.0	0.3222	0.3094	1397.0	0.0000	0.0000
1254.0	0.4436	0.4242	1326.0	0.2805	0.2696	1398.0	0.0013	0.0012
1255.0	0.4507	0.4309	1327.0	0.2663	0.2559	1399.0	0.0008	0.0008
1256.0	0.4402	0.4210	1328.0	0.2345	0.2256	1400.0	0.0000	0.0000
1257.0	0.4353	0.4163	1329.0	0.1776	0.1710	1401.0	0.0000	0.0000
1258.0	0.4450	0.4255	1330.0	0.2292	0.2205	1402.0	0.0018	0.0018
1259.0	0.4273	0.4087	1331.0	0.1448	0.1395	1403.0	0.0024	0.0023
1260.0	0.4311	0.4124	1332.0	0.1458	0.1405	1404.0	0.0007	0.0007
1261.0	0.4115	0.3937	1333.0	0.2030	0.1955	1405.0	0.0000	0.0000
1262.0	0.3957	0.3787	1334.0	0.1693	0.1630	1406.0	0.0020	0.0020
1263.0	0.4002	0.3830	1335.0	0.2312	0.2224	1407.0	0.0002	0.0002
1264.0	0.3715	0.3557	1336.0	0.1835	0.1767	1408.0	0.0016	0.0016
1265.0	0.3957	0.3787	1337.0	0.1645	0.1585	1409.0	0.0006	0.0006
1266.0	0.3853	0.3688	1338.0	0.1780	0.1715	1410.0	0.0005	0.0005
1267.0	0.3882	0.3716	1339.0	0.1768	0.1703	1411.0	0.0021	0.0021
1268.0	0.3705	0.3548	1340.0	0.1683	0.1622	1412.0	0.0026	0.0026
1269.0	0.2465	0.2366	1341.0	0.1704	0.1642	1413.0	0.0234	0.0227
1270.0	0.3874	0.3709	1342.0	0.1780	0.1715	1414.0	0.0004	0.0004
1271.0	0.4083	0.3906	1343.0	0.1271	0.1226	1415.0	0.0002	0.0002
1272.0	0.4088	0.3911	1344.0	0.0756	0.0730	1416.0	0.0356	0.0346
1273.0	0.4063	0.3887	1345.0	0.1090	0.1052	1417.0	0.0118	0.0114
1274.0	0.4061	0.3886	1346.0	0.0582	0.0562	1418.0	0.0136	0.0132
1275.0	0.4123	0.3946	1347.0	0.0601	0.0581	1419.0	0.0021	0.0021
1276.0	0.4169	0.3990	1348.0	0.0047	0.0046	1420.0	0.0083	0.0080
1277.0	0.4200	0.4019	1349.0	0.0162	0.0156	1421.0	0.0092	0.0089
1278.0	0.4276	0.4092	1350.0	0.0160	0.0155	1422.0	0.0463	0.0450
1279.0	0.4246	0.4063	1351.0	0.0046	0.0045	1423.0	0.0092	0.0090
1280.0	0.4220	0.4039	1352.0	0.0015	0.0015	1424.0	0.0170	0.0165
1281.0	0.4134	0.3955	1353.0	0.0001	0.0001	1425.0	0.0259	0.0251
1282.0	0.3731	0.3570	1354.0	0.0003	0.0003	1426.0	0.0278	0.0270
1283.0	0.4073	0.3898	1355.0	0.0000	0.0000	1427.0	0.0495	0.0482
1284.0	0.4208	0.4027	1356.0	0.0000	0.0000	1428.0	0.0046	0.0044
1285.0	0.4240	0.4058	1357.0	0.0001	0.0001	1429.0	0.0380	0.0370