
**Ships and marine technology —
Bioassay methods for screening anti-
fouling paints —**

Part 3:
Mussels

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/d033762b-4ced-4be8-afa2-5ca95baf4b7b/iso-prf-21716-3>

PROOF / ÉPREUVE



iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/d033762b-4ced-4be8-afa2-5ca95baf4b7b/iso-prf-21716-3>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Principle.....	2
5 Material and apparatus.....	3
6 Preparation of the test organism and the test seawater.....	4
6.1 General.....	4
6.2 Preparation of the test organism.....	4
6.3 Preparation of test seawater.....	4
7 Preparation of the test panels and control panels.....	4
7.1 General.....	4
7.2 Preparation of the test panels.....	4
7.3 Affixing of mussels to the test panels and control panels.....	4
8 Operation of the test.....	5
9 Validation of the test.....	6
10 Byssus threads formation.....	6
10.1 General.....	6
10.2 Calculation of the average number of byssus threads formed.....	7
10.3 Data treatment and interpretation of the results.....	7
11 Test report.....	8
Annex A (informative) Statistical analysis — Examples.....	10
Annex B (informative) General information of mussel, <i>Mytilus galloprovincialis</i>.....	14
Annex C (informative) Identification of <i>Mytilus galloprovincialis</i>.....	17
Bibliography.....	19

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 8, *Ships and marine technology*, Subcommittee SC 2, *Marine environmental protection*, in collaboration with Technical Committee ISO/TC 35, *Paints and varnishes*, Subcommittee SC 9, *General test methods for paints and varnishes*.

A list of all parts in the ISO 21716 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

Anti-fouling paints that contain biocides are widely used to prevent fouling of ship hulls by marine organisms. Effective anti-fouling technologies are critical for maintaining fuel consumption efficiency of ships and also for minimizing possible translocation of aquatic species through maritime trade. The evaluation of anti-fouling paints is generally undertaken by adopting a tiered approach whereby paint manufacturers use a battery of laboratory, raft, patch tests and full vessel trials. Raft, patch tests and full vessel trials are generally conducted over extended periods of time and are predominantly relied upon for the prediction of coating performance when used commercially on in-service ships.

The results of raft, patch test and full vessel trials (field testing) can be used as part of the regulatory process for pesticidal or biocidal products in certain countries in order to demonstrate the efficacy of an anti-fouling paint. Laboratory testing alone is recognized as being unable to predict in-service performance or efficacy. For example, guidance published by the European Chemical Agency (ECHA) on the assessment and evaluation of efficacy for anti-fouling products states clearly that laboratory testing of individual anti-fouling paints is not undertaken as it is not considered to be a realistic evaluation of the product; field testing, which permits anti-fouling products to be tested under similar operating conditions and stresses as those encountered when the antifouling product are in service is routinely undertaken instead (see Reference [35]).

Whilst laboratory tests are unable to reliably predict in-service coating performance, they have merit in the screening of experimental coatings for further evaluation during the research and development process.

Reproducible objective data obtained by following standardized screening methods, independent of the test location or the season, can be a useful tool to support the selection of anti-fouling paints for higher tier testing, e.g., raft or ship tests. ISO 21716 provides a compilation and description of *in vitro* bioassay methods intended to aid the process of screening anti-fouling paints prior to higher tier raft or ship tests. Toxicological screening methods included in each part of ISO 21716 can be used for such purposes as early decision-making in research and product development, rapid feedback on potential toxicological concerns, or for the preliminary assessment of anti-fouling paints. For instance, ISO 21716 provides information on methods that can be used to screen anti-fouling paints in order to determine whether to continue development of an experimental paint and/or a product that contains a particular ingredient, or to determine whether to take on the cost of performing the remaining tiers within a complete tiered-testing strategy.

ISO 21716 provides screening bioassays related to certain common genera of fouling organisms, namely barnacles, mussels and algae. These screening tests are relatively simple and rapid laboratory tests that can be performed to provide an indication of the toxicity of a painted surface towards selected test organisms. The screening tests described in each part of ISO 21716 can be used as part of a tiered approach to predict the ability of an anti-fouling coating to prevent fouling on ships. Alternatively, to prevent the translocation of invasive marine species by progressively involving subsequent semi-field (e.g. raft panels) and field testing (e.g. ship trials). On their own, the screening tests described in each part of ISO 21716 do not reliably predict the ability of an anti-fouling coating to prevent fouling on ships or the translocation of invasive marine species.

ISO 21716 is not intended to provide a list of validated tests for testing the efficacy of anti-fouling; this can be covered in regulations. It is not intended to provide a list of validated tests for this purpose, nor for predicting the ability of a fouling control paint to prevent fouling on ships or to prevent the translocation of invasive marine species.

Mussels are typical marine sessile organisms regarded as harmful fouling organisms because of the impact on fuel consumption and the potential for translocation of non-indigenous species if they become attached to ship hulls.

This test method utilizes young mussels to assess settling behaviour in the presence of treated panels. Young mussels are used because they have higher byssus threads production activity as compared to the adults. More information is provided in [Annex B](#).

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/d033762b-4ced-4be8-afa2-5ca95baf4b7b/iso-prf-21716-3>

Ships and marine technology — Bioassay methods for screening anti-fouling paints —

Part 3: Mussels

1 Scope

This document specifies a laboratory test method for screening anti-fouling paints in a flow-through system using mussels as the test organism. It is intended to be used in conjunction with ISO 21716-1, which specifies the general requirements. The purpose of the test is to determine if there is a difference in mussel settlement on painted test panels compared with mussel settlement on inert non-toxic control panels under the conditions of the test. Examples of statistical analysis to determine if the difference in mussel settlement is statistically significant are given in [Annex A](#).

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 21716-1:2020, *Ships and marine technology — Bioassay methods for screening anti-fouling paints — Part 1: General requirements*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 21716-1 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:


- ISO Online browsing platform: available at <https://www.iso.org/obp>;
- IEC Electropedia: available at <http://www.electropedia.org/>.

3.1

byssus

attachment organ secreted by a mussel, consisting of stem, byssus threads and adhesive discs

Note 1 to entry: See [Figure 1](#).

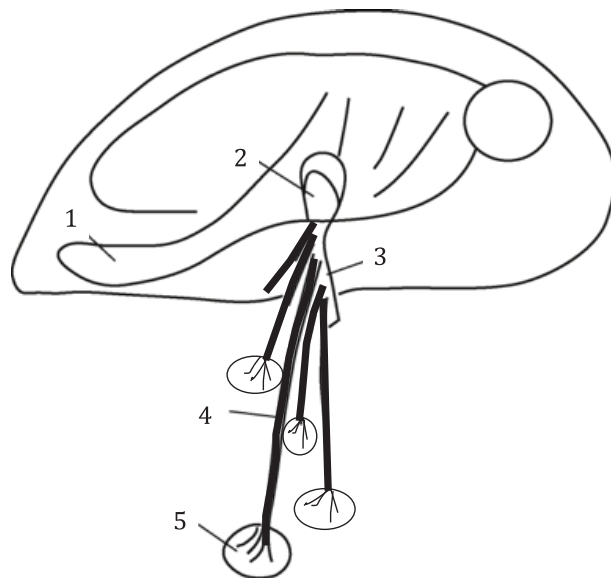

Key

- 1 foot
- 2 root (in byssus gland)
- 3 stem
- 4 byssus thread
- 5 adhesive disc (or plaque)

Figure 1 — Attachment organ of a mussel

3.2 shell length

longest linear distance between two points on the outside edge of the shell of a mussel

3.3 purified water

water with an electric conductivity of $2 \mu\text{S}/\text{cm}$ or less, prepared by distillation and/or treatment with ion exchange resin(s)

4 Principle

The test procedure consists of the following 5 sequential steps, summarized in [Figure 2](#):

- preparation of the test organism and the test seawater;
- preparation of the test panel and control panel;
- operation of the test;
- validation of the test; and
- data treatment and interpretation of the results.

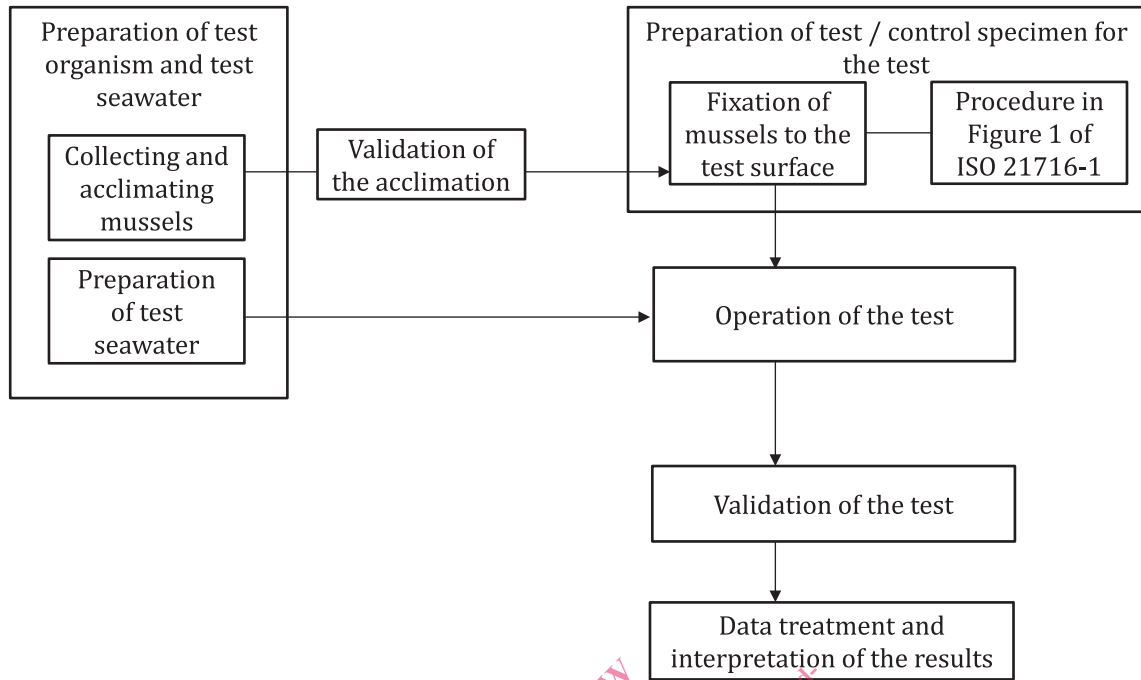


Figure 2 — Scheme of the test procedure

Each bioassay shall consist of three runs as a minimum. Each run shall consist of a test group of three or more test panels and a control group of three or more control panels. Provided that the validation criteria are met, then the number of byssus threads for the test and control groups can be compared.

5 Material and apparatus

The items listed in [Tables 1](#) and [2](#) shall be used for the test.

Table 1 — List of material used

Material	Remarks
Adhesive of surgical grade	E.g., cyano-acrylate adhesive.
Control panels	50 mm square of PVC is recommended.
Cultured stock of live young mussels	At least 30 live mussels, <i>Mytilus galloprovincialis</i> sp., with a shell length of 8 mm to 10 mm, that are attached to natural or artificial substrates. Other mussel species may be used if <i>Mytilus galloprovincialis</i> sp. mussels are not available.
Natural seawater	Defined in ISO 21716-1:2020, 3.8.
Purified water	Defined in 3.3 .
Scissors	
Small piece of paper	Filter paper may be used as spacer.
Test panels	Specified in ISO 21716-1:2020, 4.2. 50 mm square is recommended.
1 µm filters	Used to prepare test seawater.

Table 2 — List of apparatus used

Apparatus	Remarks
Light	White fluorescence or LED.
Light intensity meter	Accuracy: ±10 lx.

Table 2 (continued)

Apparatus	Remarks
pH meter	Accuracy: $\pm 0,1$.
Salinometer	Accuracy: $\pm 0,1$.
Stereo microscope	Magnification: 5-30X with fiber light.
Thermometer	Accuracy: $\pm 0,1$ °C.
Water flow-through system	Specified in ISO 21716-1:2020, 5.2, with a means of maintaining the test seawater tank at $20\text{ °C} \pm 1\text{ °C}$ and alternately illuminating the test seawater tank with a light intensity of 3 000 lx [Clause 8, d), light conditions] and with a light intensity of $<5\text{ lx}$ [see Clause 8, d), dark conditions].

6 Preparation of the test organism and the test seawater

6.1 General

The cultured stock of live mussels is used to perform the bioassay test in sea water.

6.2 Preparation of the test organism

Live mussels are generally prepared by collecting wild mussels and acclimatizing them in the laboratory prior to testing. Guidance on this process and on storing mussels can be found in [Annex B](#).

Information on the life cycle of mussels can also be found in [Annex B](#), and information on the identification of *M. galloprovincialis* sp. mussels can be found in [Annex C](#).

6.3 Preparation of test seawater

Pass natural seawater through a $1\text{ }\mu\text{m}$ filter unit and adjust to salinity $30,0 \pm 0,5$ using purified water.

7 Preparation of the test panels and control panels

7.1 General

The same test and control groups shall be used throughout the whole test.

7.2 Preparation of the test panels

Test panels shall be prepared following the specifications described in ISO 21716-1:2020, Clause 4.

7.3 Affixing of mussels to the test panels and control panels

Separate the live mussels from their substrate by cutting the byssus threads with scissors, taking care to avoid damage to other tissue and organs. Affix five mussels to each test with the adhesive, using filter paper as a spacer between the shell of the mussel and the surface of the panel, providing a 20 mm diameter circular separation zone around each mussel [see [Figure 3 a](#)].

NOTE A spacer of adhesive-infiltrated filter paper can be used to prevent excessive spreading of the adhesive and improve adhesion of the mussel to the test and control panels [see [Figure 3 b](#)].