

ISO 26872:2019(E)

Second edition

Space systems —  
Disposal of satellites  
operating at  
geosynchronous  
altitude

*Systèmes spatiaux —  
Élimination des satellites  
opérant à une altitude  
géostionnaire*

Deleted: /FDIS

Deleted: 201X-XX-XX¶

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

ISO 26872:2019

<https://standards.iteh.ai/catalog/standards/sist/77aaceba-159e-4957-872c-9e59fcaa2e6d/iso-26872-2019>

## Contents

## Page

Foreword .....	iii
Introduction .....	iv
1 Scope .....	1
2 Normative references .....	1
3 Terms and definitions .....	1
4 Symbols and abbreviated terms .....	2
5 Geosynchronous region .....	3
6 Protected region .....	3
7 Primary requirements .....	4
8 Disposal planning requirements .....	5
Annex A (informative) Tabulated values of the optimal eccentricity vector .....	8
Annex B (informative) Optimal manoeuvre sequences .....	28
B.1 General .....	28
B.2 Type A manoeuvre sequence .....	28
B.3 Type B manoeuvre sequence .....	29
B.4 Sample manoeuvre sequence .....	30
B.5 Manoeuvre sequence for low-thrust propulsion .....	32
Annex C (informative) Example calculations .....	34
C.1 Closed-form formulae for computing off-perigee burn locations .....	34
C.2 Sample 100-year histories of sun-pointing disposal orbits .....	35
Annex D (informative) Disposal strategy and analysis for sample GEO spacecraft .....	40
Bibliography .....	47

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Deleted: [www.iso.org/directives](http://www.iso.org/directives)

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Deleted: [www.iso.org/patents](http://www.iso.org/patents)

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

Deleted: [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html)

This document was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 14, *Space systems and operations*.

This second edition cancels and replaces the first edition (ISO 26872:2010), which has been technically revised. The main changes compared to the previous edition are as follows:

- to be consistent with ISO 24113, the word “satellite” has been replaced by “spacecraft”;
- ISO 24113 has been incorporated by reference, such that its normative content serves as requirements in this document as well;
- to be consistent with ISO 24113, Post-Mission Disposal is no longer defined as a conditional probability.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

Deleted: [www.iso.org/members.html](http://www.iso.org/members.html)

## Introduction

This document prescribes requirements for planning and executing manoeuvres and operations to remove an operating spacecraft from the geosynchronous orbit at the end of its mission and place it in an orbit for final disposal where it will not pose a future hazard to spacecraft operating in the geosynchronous ring.

This document includes requirements related to the following:

- when the disposal action needs to be initiated,
- selecting the final disposal orbit,
- executing the disposal action successfully, and
- depleting all energy sources to prevent explosions after disposal.

End-of-mission disposal of an Earth-orbiting spacecraft broadly means the following:

- a) removing the spacecraft from the region of space where other spacecrafts are operating, so as not to interfere or collide with these other users of space in the future, and
- b) ensuring that the disposed object is left in an inert state and is incapable of generating an explosive event that could release debris which might threaten the operating spacecraft, see ISO 16127.

For a spacecraft operating in the geosynchronous belt, the most effective means of disposal is first to re-orbit the spacecraft to a super-synchronous orbit above the region of the operating spacecraft and the manoeuvre corridor used for relocating the operating spacecraft to new longitudinal slots, and then to discharge batteries and vent propellants and take other actions to preclude a debris-producing event.

<https://standards.iteh.ai/catalog/standards/sist/77aaceba-159e-4957-872c-9e59fcaa2e6d/iso-26872-2019>

# Space systems — Disposal of satellites **operating at geosynchronous altitude**

IMPORTANT — The electronic file of this document contains colours which are considered to be useful for the correct understanding of the document. Users should therefore consider printing this document using a colour printer.

## 1 Scope

This document specifies requirements for the following:

- planning for disposal of a spacecraft operating at geosynchronous altitude to ensure that final disposal is sufficiently characterized and that adequate propellant will be reserved for the manoeuvre;
- selecting final disposal orbits where the **spacecraft** will not re-enter the operational region within the next 100 years;
- executing the disposal manoeuvre successfully;
- depleting all energy sources on board the vehicle before the end of its life to minimize the possibility of an event that can produce debris.

Deleted: satellite

This document provides techniques for planning and executing the disposal of space hardware that reflect current internationally accepted guidelines and consider current operational procedures and best practices.

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 24113:2019, Space systems — Space debris mitigation requirements

Deleted: &lt;std&gt;ISO 24113:—

Deleted: 1, Space systems — Space debris mitigation requirements&lt;/std&gt;¶

## 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 24113 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

Deleted: <https://www.iso.org/obp>Deleted: <http://www.electropedia.org/>

### 3.1

#### inclination excursion region

region in space occupied either by a non-operational geostationary **spacecraft** (3.4) or by an operational geosynchronous **spacecraft** without inclination station-keeping

Deleted: satellite

Deleted: 3

Deleted: satellite

Deleted: /FDIS

### 3.2

#### re-orbit manoeuvre

action of moving a spacecraft (3.4) to a new orbit

Deleted: satellite

### 3.3

#### satellite

manufactured object or vehicle intended to orbit the Earth, the moon or another celestial body

Deleted: 3

### 3.4

#### spacecraft

system designed to perform a set of tasks or functions in outer space, excluding launch vehicle

Deleted: vehicle

[SOURCE: ISO 24113:2019, 3.25]

Deleted: specific

Deleted: vehicles

## 4 Symbols and abbreviated terms

### 4.1 Symbols

$a$	semi-major axis
$C_R$	solar radiation pressure coefficient of the spacecraft ( $0 < C_R < 2$ )
	NOTE In some references, $C_R$ is defined as the index of surface reflection.
$e$	eccentricity
$h_p$	perigee altitude
$i$	inclination
$I_{sp}$	specific impulse
$L_S$	solar longitude
$M$	mean anomaly
$p$	semilatus rectum or semi-parameter [ $p = a(1 - e^2)$ ]
$r$	radius of orbit
$v$	true anomaly
$\mu$	Earth gravitational constant
$\sigma$	standard deviation or the positive root of the variance, which measures the dispersion of the data
$\Omega$	right ascension of ascending node (RAAN)
$\omega$	argument of perigee
$A/m$	effective area-to-mass ratio: projected area of the spacecraft perpendicular to the sun's ray divided by the mass of the spacecraft
$\Delta H$	change in altitude
$\Delta V$	delta velocity or total velocity change

### 4.2 Abbreviated terms

EGM	Earth gravitational model
EOMDP	end-of-mission disposal plan

GEO geosynchronous (geostationary) Earth orbit  
RAAN right ascension of ascending node

5 Geosynchronous region

The geosynchronous region is a circular ring around the Earth in the equatorial plane. Within this region, an object in space moves along the ring at a mean angular rate that is equal or very close to the Earth's rotation, meaning that the spacecraft appears to be positioned over a fixed location on the ground.

Deleted: satellite

Without so-called north-south station-keeping, the inclination of a GEO spacecraft will gradually cycle between 0° (equatorial orbit) and a maximum of approximately 14,6° and back again. In addition to maintaining the accuracy of its inclination, a GEO spacecraft must execute station-keeping manoeuvres to maintain longitudinal accuracy, so as to prevent a naturally occurring drift to the east or to the west caused by asymmetries in the Earth's gravitational field, unless the spacecraft is located at one of the two "gravity wells" on the geostationary arc.

Deleted: satellite

Deleted: satellite

Deleted: satellite

Figure 1 shows a three-dimensional view of the geosynchronous ring with a cross-section defining the approximate size of the ring. Figure 2 gives the dimensions of three regions of the cross-section. The cross-section is defined by two axes: the latitudinal axis and radial axis. This plane of the cross-section is perpendicular to the Earth's equatorial plane.

The three concentric boxes shown in Figure 2 give the approximate boundaries for three types of orbits. The smallest box represents the region where a geostationary spacecraft will be confined under station-keeping, and the next larger box approximates the region where a geosynchronous spacecraft may be located when its inclination is not controlled but it remains under a mission-specified value. For example, the upper value for some specific geosynchronous missions may range from 3° to 5° depending on the ground user's antenna design. The largest box represents the inclination excursion region for a non-operational GEO spacecraft and the ±200 km protected region. For most communication spacecrafts, the longitude station-keeping limit is ±0,1°.


Deleted: satellite

Deleted: satellite


Deleted: satellite

6 Protected region

The GEO protected region, defined by ISO 24113 and indicated by 3 in Figure 1, includes the rectangular toroid centred on geostationary altitude, with an extent 200 km above and below this altitude and with inclination limits of +15° to -15°. While operations are usually conducted within about 75 km of geostationary altitude, the GEO protected region is extended in altitude to create a manoeuvre corridor for relocating the spacecraft. Passivation of the disposed spacecraft is necessary to ensure that accidental explosions from on-board energy sources do not create debris that could re-enter the protected region.

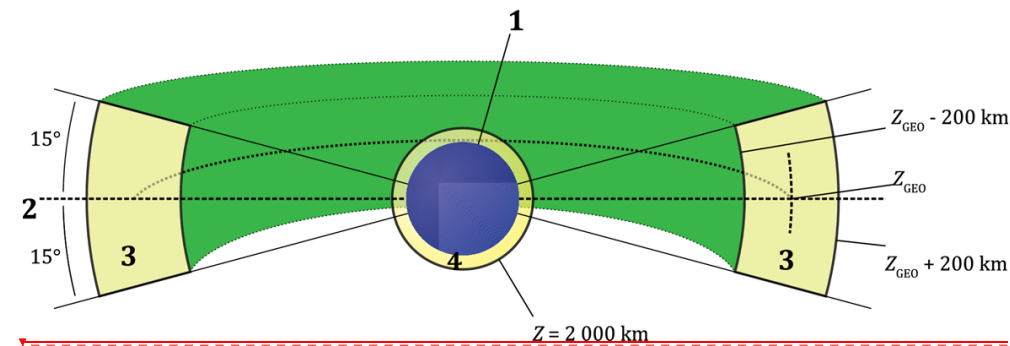


Key

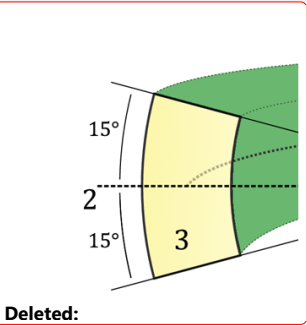

Deleted:

- 1 Earth
- 2 equator
- 3 GEO region
- 4 LEO (low Earth orbit) region
- Z altitude measured with respect to a spherical Earth whose radius is 6 378 km
- Z<sub>GEO</sub> altitude of the geostationary orbit with respect to a spherical Earth whose radius is 6 378 km
- NOTE The dimensions in the figure are not to scale.

Figure 1 — View in the equatorial plane of Earth and the protected regions

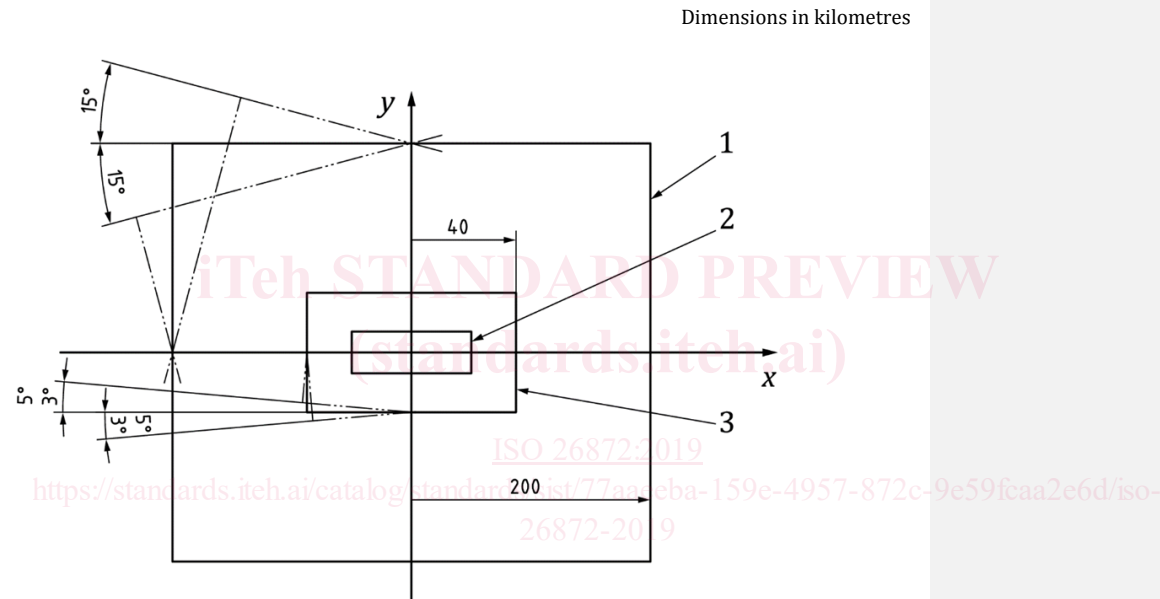

- Key**
- x radial (away from Earth)
  - y latitude (north)
  - 1 protected region
  - 2 geostationary control box ( $\pm 37,5$  km  $\times$   $\pm 37,5$  km)
  - 3 geosynchronous control box ( $\pm 40$  km radial;  $\pm 3^\circ$  to  $\pm 5^\circ$  in inclination)
  - NOTE The dimensions in the figure are not to scale.

Figure 2 — Cross-section of the geosynchronous ring

7 Primary requirements

7.1 Disposal manoeuvre planning

An EOMDP shall be developed, maintained and updated in all phases of mission and spacecraft design and operation. The EOMDP shall be an integral part of the space debris mitigation plan specified by ISO 24113. The EOMDP shall include the following:

- a) details of the nominal mission orbit;



- b) details of the targeted disposal orbit;
- c) estimates of the propellant required for the disposal action;
- d) identity of systems and capabilities required for successful completion of the disposal action;
- e) criteria that, when met, shall dictate initiation of the disposal action;
- f) identities of energy sources required to be depleted before end of life;
- g) timeline for initiating and executing the disposal action;
- h) timeline for depleting the remaining energy sources;
- i) those individuals or entities, or individuals and entities to be notified of the end of mission and disposal and a timeline for notification.

## 7.2 Probability of successful disposal

In accordance with the requirements of ISO 24113:2019, 6.3.1, a spacecraft shall be designed such that the joint probability of having sufficient energy (propellant) remaining to achieve the final disposal orbit and successfully executing commands to deplete energy sources equals or exceeds 0,9 at the time disposal is executed. Details of the design that provide the basis for the probability estimate shall be included in the EOMDP.

Deleted: 

## 7.3 Criteria for executing disposal action

Specific criteria for initiating the disposal action shall be developed, included in the EOMDP and monitored throughout the mission life.

EXAMPLE Propellant amount remaining; redundancy remaining; status of electrical power; status of systems critical to a successful disposal action; time required to execute disposal action.

Projections of mission life based on these criteria shall be made as a regular part of mission status reviews.

## 7.4 Contingency planning

Independent of the success or failure of other aspects of a disposal action, a contingency plan shall be developed to deplete all energy sources and secure the vehicle before the final demise of the spacecraft. The objective shall be to ensure that actions necessary to secure the vehicle are taken before end of life. The contingency plan shall include criteria that define when the securing actions are to be taken, the rationale for each criterion, and a schedule for securing actions. The contingency plan shall be included in the EOMDP.

# 8 Disposal planning requirements

## 8.1 General

Planning activities for end-of-mission disposal shall start in the mission design phase. Planning for the actual disposal action should begin at least six months before the date of re-orbit manoeuvres. The steps described in 8.2 to 8.8 shall be followed in all mission phases and shall be documented in the EOMDP.

## 8.2 Estimating propellant reserves

The amount of fuel necessary to perform spacecraft disposal shall be estimated from the design phase, in accordance with the needed accuracy level, and reserved for the disposal phase. The minimum  $\Delta V$  capability ( $3 - \sigma$ ) to reach the targeted disposal orbit shall be determined and specified in the EOMDP. The fuel required to provide this  $\Delta V$  shall be maintained for end-of-life disposal, see ISO 23339.

## 8.3 Computing the initial perigee increase

In accordance with the requirements of ISO 24113:2019, 6.3.2, a spacecraft operating within the GEO protected region shall, after completion of its GEO disposal manoeuvres, have an orbital state that satisfies at least one of the two conditions outlined below.

Deleted: :—,

- a) The orbit has an initial eccentricity of less than 0,003, and a minimum perigee altitude,  $\Delta H$ , expressed in kilometres, above the geostationary altitude (35 786 km) calculated according to Formula (1):

$$\Delta H = 235 + (1\,000 \times C_R \times A / m) \quad (1)$$

The minimum value of  $C_R$  for computing the initial perigee increase shall be no less than 1,5 (a conservative estimate for  $C_R$ , so as to adequately predict the solar radiation pressure effect). Justification shall be provided for using a value less than 1,5. Formula (1) was derived to ensure that the long-term perturbations will not cause the GEO debris to re-enter a protected zone of GEO plus 200 km.

- b) The orbit has a perigee altitude sufficiently above the geostationary altitude that the spacecraft will not enter the GEO protected region within 100 years, irrespective of long-term perturbation forces.

## 8.4 Developing basic manoeuvre requirements for a stable disposal orbit

A stable disposal orbit shall be established by one of the two options described below.

- a) Use Formula (1) and the eccentricity constraint to determine initial disposal orbit conditions.
- b) Perform long-term (100-year) numerical integrations of the selected disposal orbit. The predicted minimum perigee altitude shall be greater than the 200 km protected region (see 8.5). It is recommended that the optimal eccentricity vector be determined from Tables A.1 to A.3, as a function of the date of orbital insertion and the value of  $C_R \times A / m$ .

The altitude stability will be improved for either method if the following apply:

- the initial disposal perigee points toward the sun (perigee is sun-pointing);
- the disposal manoeuvres are performed in the most favourable season of the year, such that the same amount of perigee altitude increase will give the largest clearance over 100 years.

NOTE 1 The true optimal direction will differ slightly from the actual sun-pointing direction as a result of lunar perturbations.

NOTE 2 See Annex A for the optimal eccentricity and argument of perigee as a function of time for various values of  $C_R \times A / m$ . Disposal orbits defined in accordance with Formula (1) are stable if the final eccentricity is less than 0,003. Tables A.1 to A.3 can be used to select the initial guess if option b) is used to determine the initial orbit parameters.

Should the intention be to operate the vehicle after placing it in a disposal orbit, the effects of such operation on the orbit shall be estimated; and this estimate and computations verifying that the operations will not compromise the long-term stability of the orbit (i.e. perigee shall remain above the

protected region for 100 years) shall be included in the EOMDP. In all cases, the spacecraft shall be passivated (see 8.7) prior to end of life.

### 8.5 Developing long-term (100-year) disposal orbit characteristics

Long-term (100-year) orbit histories are needed only when the second option [see 8.4 b)] is chosen to establish a stable disposal orbit. If 8.4 b) is chosen, orbit propagation results developed by a reliable orbit propagator, either semi-analytic or numerical, shall be used to predict histories of perigee heights above GEO for a period of 100 years after initial insertion into the disposal orbit. The orbit propagator shall be of high precision and include as a minimum the perturbing forces of Earth's gravitational harmonics (up to a degree/order of 6 by 6), lunisolar attractions and solar radiation pressure. The precision of long-term propagation of the propagator shall be verified against another well-established orbit propagator. Details on the orbit propagator used, assumptions made and analysis results shall be included in the EOMDP.

### 8.6 Determining the manoeuvre sequence

The manoeuvre sequence shall be determined that will place the GEO ~~spacecraft~~ in the required disposal orbit, have the optimal near-sun-pointing perigee and exhaust all the propellant on board. The disposal orbit is obtained after passivation and complete tank depletion, which can have unpredictable effects on orbital parameters and altitude. See Annex B for examples. The initial conditions of the disposal orbit shall be determined using the steps outlined in 8.4 and 8.5.

Deleted: satellite

### 8.7 Developing a vehicle securing plan

Depletion of propellant creates forces that can affect a vehicle's orbit. The vehicle securing plan shall specify the following:

- steps to deplete on-board energy sources after the ~~spacecraft~~ has been placed into the disposal orbit;
- the effects the depletion action will have on the final orbit of the vehicle (the goal should be either to increase altitude or at least to limit a possible decrease in altitude);
- criteria for when the plan will be executed;
- a schedule to be followed.

Deleted: satellite

### 8.8 Developing a contingency plan

If a malfunction or other circumstance makes it necessary to proceed to the disposal phase earlier than planned, a contingency plan shall be developed that includes provisions for the following:

- selecting an alternative orbit that is the least likely to interfere with the protected area (see Annex C): the contingency plan shall include criteria and techniques for selecting this orbit;
- manoeuvring the ~~spacecraft~~ to the alternative orbit;
- securing the ~~spacecraft~~ after the move;
- securing the vehicle if specified criteria are met at any time in the mission.

Deleted: satellite

Deleted: satellite

Annex D provides an example in which the quantity of propellant remaining is uncertain.

## Annex A (informative)

### Tabulated values of the optimal eccentricity vector

Tables A.1 to A.3 contain the optimal eccentricity vector [eccentricity and argument of perigee plus RAAN (or longitude of periapsis)] as a function of time and a function of  $(C_R \times A/m)$ , expressed in square metres per kilogram, that will yield the highest perigee over the next 100 years. The optimal values were calculated in a brute-force fashion using increments of  $2,3 \times 10^{-5}$  in eccentricity and  $5^\circ$  in longitude of periapsis. The benefit gained from using the optimal vector over the sun-pointing strategy varied from 0 km to 20 km (the average was approximately 9 km). However, if the sun-pointing strategy is chosen for the disposed vehicle, then the longitude of periapsis should be set equal to the value of the solar longitude (depicted as  $L_S$  in Tables A.1 to A.3) with an eccentricity equal to  $0,01 \times C_R \times A/m$ . These charts can be interpolated to find the optimal vector for any particular spacecraft at a given time. However, the following should be noted when using these tables.

Deleted: satellite

The initial conditions used to generate the data assumed a constant semi-major axis of 300 km above GEO (i.e. a constant  $\Delta V$  was used in the disposal), mean anomaly of  $180^\circ$  (i.e. the last burn occurs at apogee, raising the perigee so that the eccentricity is equal to the tabulated value), an inclination of  $7,74^\circ$  (maximum at end of life if inclination drift is allowed) and an epoch of 0:00 Universal Time on the first day of each month. Additional analysis has shown that the optimal vector depends little upon these elements (the minimum perigee altitude may vary by approximately 2 km for each component), but if a high level of accuracy is required for a given disposal, the interpolated values found from the tables should be used as an initial guess so as to find the optimum for a particular disposal situation. The exception is the RAAN: in the search process, the initial RAAN was set to  $62,3^\circ$  and the argument of perigee was changed in  $5^\circ$  increments until the optimal value was found. Different RAANs were then checked and it was found that the relevant angular parameter was the argument of perigee plus RAAN; if this value is held constant, then the results will again be consistent with 1 km to 2 km, irrespective of the particular RAAN.

In addition, care should be taken if interpolating the values. In searching for optimal values in the angular argument, it was found that, at times, there was not one pure maximum, but multiple local maximums. As either the time or  $C_R \times A/m$  advanced, the true maximum jumped from one peak to another. For example, consider the 2008-05-01 disposal. A  $C_R \times A/m$  of  $0,015 \text{ m}^2/\text{kg}$  has an optimal eccentricity of  $0,000\ 04$  and a longitude of periapsis and  $262,3^\circ$ , whereas the  $C_R \times A/m$  of  $0,03 \text{ m}^2/\text{kg}$  has optimal values of  $0,000\ 09$  and  $37,3^\circ$ . Linearly interpolating would imply optimal values of  $0,000\ 057$  and  $307,3^\circ$  for a  $C_R \times A/m$  of  $0,02 \text{ m}^2/\text{kg}$ . Instead, the  $C_R \times A/m = 0,02$  optimal value was actually  $0,000\ 015$  and  $47,3^\circ$ . In this case, the optimal point switched from one maximum to another, and therefore the intermediate maximum would actually be close to one point or the other.

Therefore, when confronted with angular changes greater than  $90^\circ$ , it is recommended that interpolation not be performed. Instead, the closer value should be used either directly or as a starting point for a more refined search.

A few final comments on the general behaviour of the system are warranted. When the  $A/m$  was small ( $C_R \times A/m < 0,01$ ), the optimal angle was pointed at the lunar apogee; when the  $A/m$  was large ( $C_R \times A/m > 0,03$ ), the solar radiation pressure force became dominant and the optimal angle was directed toward the sun.

**Table A.1 — Optimal eccentricity vector for  $C_R \times A/m = 0,00 \text{ m}^2/\text{kg}$ ,  $C_R \times A/m = 0,005 \text{ m}^2/\text{kg}$  and  $C_R \times A/m = 0,01 \text{ m}^2/\text{kg}$**

Year	Month	$L_S$ (°)	$C_R \times A/m = 0,00 \text{ m}^2/\text{kg}$		$C_R \times A/m = 0,005 \text{ m}^2/\text{kg}$		$C_R \times A/m = 0,01 \text{ m}^2/\text{kg}$	
			$e$	$\omega + \Omega$	$e$	$\omega + \Omega$	$e$	$\omega + \Omega$
2006	1	281	0,000 115	132,3	0,000 065	142,3	0,000 090	177,3
	2	314	0,000 140	112,3	0,000 115	102,3	0,000 065	102,3
	3	341	0,000 140	117,3	0,000 115	117,3	0,000 115	92,3
	4	10	0,000 140	142,3	0,000 115	132,3	0,000 090	117,3
	5	38	0,000 140	162,3	0,000 115	147,3	0,000 090	127,3
	6	68	0,000 115	177,3	0,000 115	167,3	0,000 090	122,3
	7	99	0,000 065	167,3	0,000 090	122,3	0,000 140	117,3
	8	131	0,000 090	142,3	0,000 140	137,3	0,000 190	137,3
	9	160	0,000 115	157,3	0,000 165	157,3	0,000 215	157,3
	10	187	0,000 090	167,3	0,000 140	172,3	0,000 215	177,3
	11	216	0,000 090	187,3	0,000 140	202,3	0,000 215	207,3
	12	246	0,000 165	177,3	0,000 115	207,3	0,000 165	222,3
2007	1	281	0,000 140	187,3	0,000 140	207,3	0,000 140	222,3
	2	314	0,000 165	207,3	0,000 165	217,3	0,000 165	232,3
	3	341	0,000 165	212,3	0,000 115	227,3	0,000 115	242,3
	4	10	0,000 090	217,3	0,000 065	237,3	0,000 040	257,3
	5	37	0,000 040	192,3	0,000 015	167,3	0,000 015	147,3
	6	68	0,000 115	192,3	0,000 090	172,3	0,000 115	162,3
	7	99	0,000 140	202,3	0,000 165	192,3	0,000 140	177,3
	8	130	0,000 190	222,3	0,000 165	212,3	0,000 140	197,3
	9	159	0,000 165	237,3	0,000 165	222,3	0,000 190	207,3
	10	186	0,000 115	207,3	0,000 165	212,3	0,000 240	212,3
	11	215	0,000 190	227,3	0,000 240	227,3	0,000 290	227,3
	12	246	0,000 165	232,3	0,000 215	237,3	0,000 290	242,3
2008	1	280	0,000 115	237,3	0,000 165	252,3	0,000 215	252,3
	2	313	0,000 090	222,3	0,000 115	247,3	0,000 140	262,3
	3	342	0,000 115	227,3	0,000 090	252,3	0,000 115	272,3
	4	10	0,000 140	227,3	0,000 115	242,3	0,000 065	267,3
	5	38	0,000 190	237,3	0,000 115	242,3	0,000 090	252,3
	6	69	0,000 165	247,3	0,000 115	247,3	0,000 040	242,3
	7	100	0,000 140	237,3	0,000 115	227,3	0,000 140	212,3
	8	131	0,000 215	237,3	0,000 240	232,3	0,000 215	222,3
	9	160	0,000 215	252,3	0,000 165	242,3	0,000 165	232,3
	10	187	0,000 140	262,3	0,000 165	247,3	0,000 190	237,3
	11	216	0,000 215	247,3	0,000 115	252,3	0,000 165	242,3
	12	247	0,000 090	237,3	0,000 140	242,3	0,000 190	247,3
2009	1	280	0,000 140	242,3	0,000 165	252,3	0,000 265	257,3

	2	313	0,000 165	257,3	0,000 190	267,3	0,000 265	272,3
	3	342	0,000 165	262,3	0,000 190	272,3	0,000 215	287,3
	4	10	0,000 115	262,3	0,000 115	287,3	0,000 140	312,3
	5	38	0,000 115	252,3	0,000 065	267,3	0,000 040	347,3
	6	69	0,000 115	272,3	0,000 065	282,3	0,000 040	287,3
	7	100	0,000 090	287,3	0,000 040	277,3	0,000 015	272,3
	8	131	0,000 015	292,3	0,000 015	342,3	0,000 015	192,3
	9	160	0,000 040	267,3	0,000 040	227,3	0,000 090	222,3
	10	187	0,000 140	297,3	0,000 115	247,3	0,000 115	237,3
	11	216	0,000 115	282,3	0,000 140	272,3	0,000 165	262,3
	12	247	0,000 090	302,3	0,000 115	287,3	0,000 165	277,3
2010	1	280	0,000 040	33 2,3	0,000 040	277,3	0,000 115	282,3
	2	313	0,000 065	282,3	0,000 090	297,3	0,000 165	297,3
	3	341	0,000 040	302,3	0,000 090	312,3	0,000 140	307,3
	4	10	0,000 065	332,3	0,000 090	342,3	0,000 140	347,3
	5	38	0,000 090	352,3	0,000 115	7,3	0,000 165	7,3
	6	68	0,000 090	22,3	0,000 115	27,3	0,000 140	37,3
	7	99	0,000 065	27,3	0,000 090	47,3	0,000 115	57,3
	8	131	0,000 015	337,3	0,000 040	67,3	0,000 065	77,3
	9	160	0,000 065	342,3	0,000 015	352,3	0,000 015	322,3
	10	187	0,000 090	7,3	0,000 040	7,3	0,000 015	7,3
	11	216	0,000 140	37,3	0,000 090	32,3	0,000 040	32,3
	12	246	0,000 140	47,3	0,000 065	32,3	0,000 040	17,3
2011	1	279	0,000 140	27,3	0,000 140	12,3	0,000 140	357,3
	2	313	0,000 215	42,3	0,000 190	27,3	0,000 215	17,3
	3	341	0,000 215	47,3	0,000 215	32,3	0,000 265	27,3
	4	10	0,000 165	57,3	0,000 215	52,3	0,000 240	42,3
	5	37	0,000 115	57,3	0,000 165	57,3	0,000 215	52,3
	6	68	0,000 115	42,3	0,000 165	52,3	0,000 215	57,3
	7	99	0,000 190	37,3	0,000 190	47,3	0,000 215	57,3
	8	130	0,000 265	47,3	0,000 265	57,3	0,000 265	62,3
	9	159	0,000 265	62,3	0,000 265	72,3	0,000 290	77,3
	10	186	0,000 215	62,3	0,000 165	72,3	0,000 140	92,3
	11	215	0,000 265	57,3	0,000 190	57,3	0,000 165	62,3
	12	246	0,000 265	62,3	0,000 190	62,3	0,000 140	62,3
2012	1	279	0,000 240	72,3	0,000 190	67,3	0,000 140	57,3
	2	312	0,000 190	67,3	0,000 190	57,3	0,000 165	42,3
	3	342	0,000 190	67,3	0,000 215	52,3	0,000 215	42,3
	4	10	0,000 240	62,3	0,000 265	57,3	0,000 340	52,3
	5	38	0,000 315	67,3	0,000 340	62,3	0,000 415	62,3

	6	69	0,000 315	77,3	0,000 365	77,3	0,000 415	72,3
	7	100	0,000 240	72,3	0,000 290	77,3	0,000 390	82,3
	8	131	0,000 315	72,3	0,000 340	77,3	0,000 365	82,3
	9	160	0,000 340	82,3	0,000 340	87,3	0,000 340	92,3
	10	187	0,000 290	87,3	0,000 290	97,3	0,000 265	107,3
	11	216	0,000 215	87,3	0,000 215	102,3	0,000 190	112,3
	12	247	0,000 215	82,3	0,000 140	82,3	0,000 090	87,3
2013	1	279	0,000 290	77,3	0,000 240	72,3	0,000 190	62,3
	2	312	0,000 340	82,3	0,000 315	77,3	0,000 290	72,3
	3	342	0,000 340	87,3	0,000 340	82,3	0,000 315	77,3
	4	10	0,000 315	97,3	0,000 290	87,3	0,000 315	77,3
	5	38	0,000 290	92,3	0,000 315	87,3	0,000 365	82,3
	6	69	0,000 315	97,3	0,000 390	97,3	0,000 415	92,3
	7	100	0,000 290	107,3	0,000 340	102,3	0,000 390	102,3
	8	131	0,000 240	112,3	0,000 290	112,3	0,000 340	117,3
	9	160	0,000 215	107,3	0,000 240	117,3	0,000 290	122,3
	10	187	0,000 265	97,3	0,000 265	112,3	0,000 290	122,3
	11	216	0,000 340	102,3	0,000 315	112,3	0,000 265	122,3
	12	247	0,000 340	112,3	0,000 290	117,3	0,000 265	127,3
2014	1	280	0,000 265	117,3	0,000 215	127,3	0,000 165	132,3
	2	313	0,000 265	112,3	0,000 215	112,3	0,000 190	102,3
	3	341	0,000 290	117,3	0,000 265	107,3	0,000 240	102,3
	4	10	0,000 315	127,3	0,000 290	122,3	0,000 290	117,3
	5	38	0,000 315	137,3	0,000 290	132,3	0,000 265	122,3
	6	68	0,000 240	142,3	0,000 240	137,3	0,000 290	122,3
	7	99	0,000 190	137,3	0,000 265	127,3	0,000 265	127,3
	8	131	0,000 240	127,3	0,000 315	127,3	0,000 365	127,3
	9	160	0,000 265	137,3	0,000 315	137,3	0,000 365	142,3
	10	187	0,000 290	142,3	0,000 340	152,3	0,000 365	152,3
	11	216	0,000 265	152,3	0,000 290	157,3	0,000 315	167,3
	12	246	0,000 340	162,3	0,000 265	162,3	0,000 265	177,3
2015	1	279	0,000 315	162,3	0,000 290	172,3	0,000 265	182,3
	2	313	0,000 265	177,3	0,000 240	182,3	0,000 215	192,3
	3	341	0,000 240	177,3	0,000 215	177,3	0,000 165	182,3
	4	10	0,000 190	172,3	0,000 165	162,3	0,000 090	162,3
	5	37	0,000 215	162,3	0,000 190	152,3	0,000 190	142,3
	6	68	0,000 290	162,3	0,000 315	152,3	0,000 340	142,3
	7	99	0,000 315	172,3	0,000 315	162,3	0,000 340	157,3
	8	130	0,000 315	182,3	0,000 340	177,3	0,000 365	172,3
	9	159	0,000 265	182,3	0,000 290	182,3	0,000 365	177,3