

---

---

## Hydrometry — Functional requirements and characteristics of suspended-sediment samplers

*Hydrométrie — Spécifications de fonctionnement et caractéristiques  
des appareils d'échantillonnage pour la détermination des charges  
sédimentaires en suspension*

iTeh Standards  
(<https://standards.iteh.ai>)  
Document Preview

ISO 3716:2021

<https://standards.iteh.ai/catalog/standards/iso/a6eb7b49-27b8-4ff2-a90e-acaf1ae1372c/iso-3716-2021>



**iTeh Standards**  
**(<https://standards.iteh.ai>)**  
**Document Preview**

ISO 3716:2021

<https://standards.iteh.ai/catalog/standards/iso/a6eb7b49-27b8-4ff2-a90e-acaf1ae1372c/iso-3716-2021>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

<b>Foreword</b> .....	<b>iv</b>
<b>Introduction</b> .....	<b>v</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Terms and definitions</b> .....	<b>1</b>
<b>4 Requirements of samplers</b> .....	<b>1</b>
<b>5 Characteristics of suspended-sediment samplers</b> .....	<b>3</b>
<b>6 Types of samplers</b> .....	<b>3</b>
6.1 Open containers.....	3
6.2 Vertical and horizontal cylinder instantaneous trap samplers.....	3
6.3 Weighted bottle samplers.....	4
6.4 Pumping samplers.....	5
6.4.1 General.....	5
6.4.2 Fixed-orifice pumping samplers.....	5
6.4.3 Moveable-orifice samplers.....	6
6.5 Single-stage samplers.....	6
6.6 Point-integrating samplers.....	7
6.7 Depth-integrating samplers.....	7
6.8 Clean samplers.....	8
6.9 Sand-flux samplers.....	9
<b>7 Models of samplers</b> .....	<b>10</b>
<b>Bibliography</b> .....	<b>13</b>

<https://standards.iteh.ai/standards/iso/a6eb7b49-27b8-4ff2-a90e-acaf1ae1372c/iso-3716-2021>

<https://standards.iteh.ai/catalog/standards/iso/a6eb7b49-27b8-4ff2-a90e-acaf1ae1372c/iso-3716-2021>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 113, *Hydrometry*, Subcommittee SC 6, *Sediment transport*.

This second edition cancels and replaces the first edition (ISO/TS 3716:2006), which has been technically revised. The main changes compared with the previous edition are as follows:

- the Scope has been clarified to include samplers for collecting water-sediment mixtures of rivers, streams, lakes and reservoirs and exclude equipment for sampling closed conduits and wastewater discharges;
- clauses on sampling techniques have been removed;
- the types and models of samplers have been expanded.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

## Introduction

Suspended-sediment samplers are used to collect a representative sample of the water-sediment mixture of streams, rivers, lakes and reservoirs. Ideally, the sampler should be able to collect samples that represent the mean concentration of suspended sediment or define the horizontal and vertical variation of suspended-sediment concentration so that the mean concentration can be determined. There are different types of samplers available for collecting suspended sediment, including some that are appropriate for sampling in lakes and reservoirs and others that are used for sampling in streams and rivers. Open containers, vertical and horizontal cylinders, bottle samplers and pumping samplers are used primarily in lakes and reservoirs. Point-integrating samplers, depth-integrating samplers, single-stage samplers and pumping samplers are used primarily in streams and rivers. Only samplers that operate isokinetically can collect unbiased, representative samples of suspended sand-size particles in streams and rivers. Some samplers have also been adapted to enable the collection of clean (uncontaminated) samples of trace metal and organic compounds that are commonly associated with suspended sediment in streams and rivers.

## iTeh Standards (<https://standards.iteh.ai>) Document Preview

[ISO 3716:2021](https://standards.iteh.ai/catalog/standards/iso/a6eb7b49-27b8-4ff2-a90e-acaf1ae1372c/iso-3716-2021)

<https://standards.iteh.ai/catalog/standards/iso/a6eb7b49-27b8-4ff2-a90e-acaf1ae1372c/iso-3716-2021>



# Hydrometry — Functional requirements and characteristics of suspended-sediment samplers

## 1 Scope

This document specifies the functional requirements and characteristics of the different types of suspended-sediment samplers used for collecting water-sediment mixtures from streams, rivers, lakes and reservoirs.

This document does not include equipment for collecting samples in closed conduits and wastewater discharges.

NOTE The units of measurement used in this document are SI units.

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 772, *Hydrometric determinations — Vocabulary and symbols*

## 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 772 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at <https://www.iso.org/obp>

— IEC Electropedia: available at <http://www.electropedia.org/>

### 3.1


#### **isokinetic sampling**

method of sampling where the intake velocity of the suspended-sediment sampler equals the ambient stream velocity

## 4 Requirements of samplers

To ensure that the samples taken by a sampler are truly representative of the sediment concentration of a stream at a point of sampling, the ideal sampler shall fulfil the following technical requirements.

- The sampler shall be streamlined to reduce drag and to minimize disturbances to normal sediment flow. [Figure 1](#) shows an example of a typical streamlined sampler.
- The velocity of inflow in the mouth of the sampler, nozzle or sampling tube shall be isokinetic or as close as possible to the velocity of the current at the sampling point, irrespective of what this velocity may be or irrespective of what the depth of submergence at this point may be.
- The mouth/intake of the sampler shall always face into the current at the sampling point.
- The mouth/intake of the sampler shall be outside the zone of the disturbances of the flow set up by the body of the sampler and its operating gear, and the flow lines shall be disturbed as little as possible, especially near the mouth.

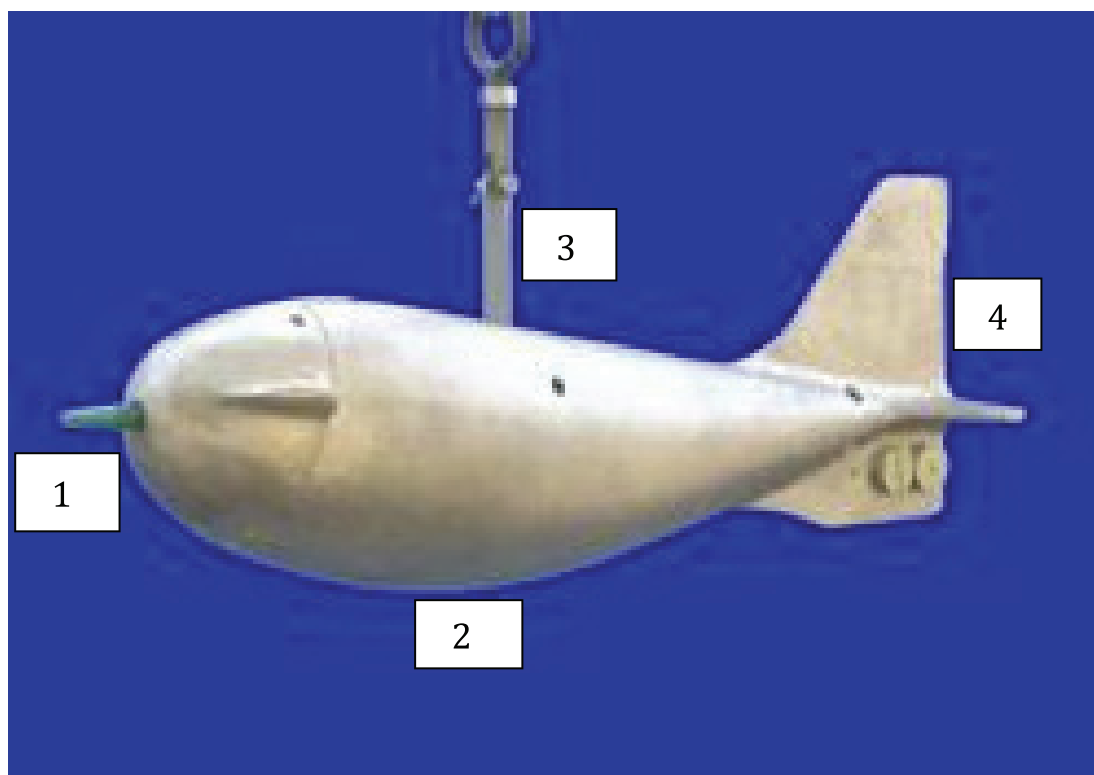

**Key**

- 1 nozzle
- 2 body holding sample bottle
- 3 hanger
- 4 tail fin

**Figure 1 — Typical depth-integrating sampler**

- e) Filling arrangements shall be smooth so that there is no sudden inrush of water-sediment mixture; the air escaping from the sampler shall not hinder the entry of the sample; this necessitates a separate port for air exhaust.
- f) Point-type samplers shall be able to collect samples at the desired depth without the samples being disturbed or contaminated by the water-sediment mixture at other points while the sampler is being raised or lowered.
- g) Point-type samplers shall be able to take a sample exactly when and where it is required.
- h) The sampler shall be portable, yet sufficiently heavy to minimize deflection of the supporting cable from the vertical due to current drag.
- i) The sampler shall be simple in design and robust in construction and shall require minimum care in maintenance and operation.
- j) The removable-type container within the sampler shall be easily removed, readily capped or sealed and easily transported to a laboratory without loss of contents. Alternatively, if the container forms part of the sampler, it shall be installed to secure complete drainage of the contents.
- k) The volume of the sample collected by the sampler shall be sufficient for determining the concentration and size distribution of the sediment. The minimum sample size is generally 0,5 l.
- l) The sampler shall be able to collect samples of water-sediment mixtures in streams and rivers isokinetically over the depth, width, and velocity conditions to be sampled. If samples cannot be



collected isokinetically because water velocities are lower than the operating limits of sampler or the velocity of the current is not known, large errors in the concentration of sand particles can occur.

## 5 Characteristics of suspended-sediment samplers

Since the sampling conditions encountered in lakes, reservoirs, streams and rivers vary widely, a single sampler for all the conditions cannot be recommended. Factors such as availability, cost and specific requirements of the sampling also influence the choice of the sampler to a great extent. The different types of samplers include open containers, vertical and horizontal cylinders, bottle samplers, pumping samplers, single-stage samplers, point-integrating samplers and depth-integrating samplers. All these types of samplers can collect a representative sample of the water-sediment mixture in a river or stream under the right conditions, but many of them cannot be used in rivers with swift currents and a non-uniform distribution of sediment concentration. For general use in rivers and streams, isokinetic point-integrating and depth-integrating samplers are recommended. The use of trade, product or firm names in this document is for descriptive purposes only and does not imply endorsement.

## 6 Types of samplers

### 6.1 Open containers

This type of sampler consists of an ordinary pail, can or open bottle. The sample is collected by holding the container under the surface of the water or by lowering it to the water surface with a rope or cable. The filled container can be sealed for transport and subsequent analysis or the sample can be transferred into another container that can be sealed. Open-container samplers can only collect a sample at the water surface and do not meet most of the requirements noted in [Clause 4](#). Representative samples are collected only if the water-sediment mixture is thoroughly mixed and contains negligible coarse silt and sand.

It is important to limit any recirculation of water-sediment mixture while obtaining the sample in order to limit sediment settling in the open container resulting in bias (high) errors.

### 6.2 Vertical and horizontal cylinder instantaneous trap samplers

These samplers (see [Figures 2](#) and [3](#)) are typically made of steel, brass or plastic. They are made in various diameters and lengths. The cylinder is lowered to the desired sampling point with the valves at each end of the cylinder in the open position. The sample is collected by closing the valves and retrieving the cylinder. The valves are actuated by an electrical impulse or by sending a weight down the suspension cable to trip spring-loaded valves. The sample is typically transferred to another container, so the cylinder can be reused.

These samplers can collect samples at specific depths. The samples are instantaneous, rather than integrated over any time or space. Under ideal conditions, they will collect a representative sample, particularly if there is negligible coarse silt and sand. They are well suited to sampling lakes and reservoirs and low velocity conditions in streams and rivers.

These samplers, particularly the vertical cylinders, offer considerable resistance to flow and are only stable at very low velocities. Vertical cylinders cannot sample close to the streambed. Horizontal samplers can sample near the streambed.



Figure 2 — Kemmerer sampler

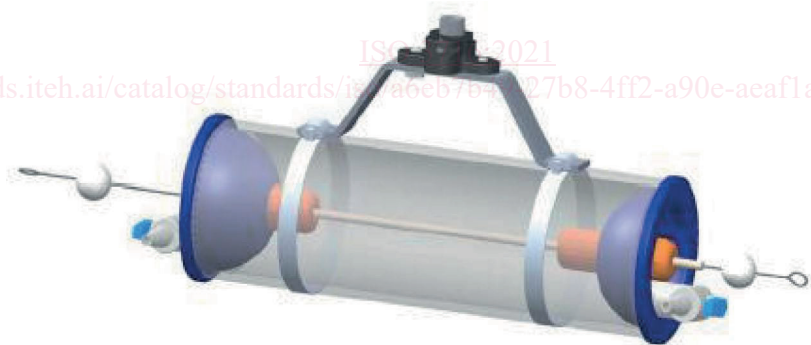


Figure 3 — Van Dorn horizontal sampler

### 6.3 Weighted bottle samplers

There are many different variations of bottle samplers. They generally consist of a weighted container to hold a 0,5 l to 2 l sample bottle. The sampler is lowered to the desired depth by a rope or cable and then the cap is removed from the bottle to collect the sample. Some models have the capability of both opening and closing the bottle cap, so the sample is sealed and no intermixing of the sample with the water-sediment mixture occurs while the sampler is being retrieved.

These samplers are not isokinetic. If there is any intermixing, then concentrations can be biased high because of sediment settling within the sample container. They are sometimes able to collect a representative sample for low velocity, well mixed conditions.