
**Nanotechnologies — Method to
estimate cellular uptake of carbon
nanomaterials using optical
absorption**

*Nanotechnologies — Méthode d'estimation de la captation cellulaire
des nanomatériaux carbonés par mesure d'absorption optique*

iTeh Standards

(<https://standards.iteh.ai>)

Document Preview

[ISO/TS 23034:2021](https://standards.iteh.ai/catalog/standards/iso/b7e18bb6-1544-4904-aca4-27115f206673/iso-ts-23034-2021)

<https://standards.iteh.ai/catalog/standards/iso/b7e18bb6-1544-4904-aca4-27115f206673/iso-ts-23034-2021>



iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO/TS 23034:2021](https://standards.iteh.ai/catalog/standards/iso/b7e18bb6-1544-4904-aca4-27115f206673/iso-ts-23034-2021)

<https://standards.iteh.ai/catalog/standards/iso/b7e18bb6-1544-4904-aca4-27115f206673/iso-ts-23034-2021>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms, definitions and abbreviated terms	1
3.1 Terms and definitions.....	1
3.2 Abbreviated terms.....	1
4 Method overview	2
4.1 General.....	2
4.2 Optical absorption of carbon nanomaterials.....	3
4.3 Optical absorption of biomolecules.....	4
4.4 Determination of the concentration of CNMs in dispersion by absorbance.....	4
4.5 Case studies.....	4
5 Materials and apparatus	5
5.1 Materials.....	5
5.1.1 Chemicals.....	5
5.1.2 Cell line.....	5
5.2 Apparatus.....	5
5.2.1 UV-Vis-NIR spectrometer.....	5
5.2.2 Cuvette for optical absorption measurement.....	5
5.2.3 Incubator, 37 °C, humidified, 5 % CO ₂ /air.....	5
5.2.4 Culture dishes, single-well or multi-well plates can be used. 6 multi-well plates with flat bottom are recommended.....	5
5.2.5 Centrifuge.....	5
5.2.6 Homogenizer.....	6
5.2.7 Cell counter.....	6
6 Cell-uptake testing protocol	6
6.1 General.....	6
6.2 Sample preparation.....	6
6.3 Preparation of calibration curve of CNM dispersions.....	6
6.4 Cell-seeding.....	6
6.5 Treatment of cells with testing suspension.....	7
6.6 Cell counting.....	7
6.7 Washing cells and preparation of the cell lysate.....	7
6.7.1 General.....	7
6.7.2 For adherent cells.....	7
6.7.3 For floating cells.....	8
6.8 Absorbance measurement of the cell lysate.....	8
7 Sources of variability	8
8 Data output	9
8.1 General.....	9
8.2 Data analysis and reporting.....	9
8.3 Data sheet format.....	9
Annex A (informative) Case study with SWCNTs	10
Annex B (informative) Case study of CNHs	16
Annex C (informative) Case study of MWCNTs	20
Bibliography	24

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 229, *Nanotechnologies*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

[ISO/TS 23034:2021](https://standards.iteh.ai/standards/iso/b7e18bb6-1544-4904-aca4-27115f206673/iso-ts-23034-2021)

<https://standards.iteh.ai/catalog/standards/iso/b7e18bb6-1544-4904-aca4-27115f206673/iso-ts-23034-2021>

Introduction

Owing to their unusual physical and chemical properties, carbon nanomaterials (CNMs), such as carbon nanotubes, carbon black, graphene, and carbon nanohorns, have been considered for various applications such as in the fields of electronics, energy, nanotechnology, and biology. With the increase of CNM-based products on the market, the public concern regarding possible toxicities has also increased. Estimation of the amount of CNM associated with the targeted cells is useful for an initial toxicological screening of CNMs and for developing applications in medicine^{[1][2][3][4]}.

Fluorescent dyes and/or radioactive isotopes have been routinely used to measure cellular uptake. Because CNMs absorb light in near infrared (NIR) region, where the bio-components such as protein and water in cells or tissues have relatively low light absorption, the cellular uptake of CNMs can be estimated from the absorbance of cell-lysate^{[5][6][7][8]}.

iTeh Standards (<https://standards.iteh.ai>) Document Preview

[ISO/TS 23034:2021](https://standards.iteh.ai/catalog/standards/iso/b7e18bb6-1544-4904-aca4-27115f206673/iso-ts-23034-2021)

<https://standards.iteh.ai/catalog/standards/iso/b7e18bb6-1544-4904-aca4-27115f206673/iso-ts-23034-2021>

Nanotechnologies — Method to estimate cellular uptake of carbon nanomaterials using optical absorption

1 Scope

This document describes a near-infrared optical absorption method to estimate the in vitro cellular uptake of carbon nanomaterials including both internalized and/or tightly adhered to the cell membrane from liquid dispersions. This is a simple method to screen carbon nanomaterials uptake; additional analysis using a different technique can be required if quantification is desired.

2 Normative references

The following document is referenced in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3696:1987, *Water for analytical laboratory use — Specification and test methods*

ISO/TS 80004-3, *Nanotechnologies — Vocabulary — Part 3: Carbon nano-objects*

3 Terms, definitions and abbreviated terms

For the purposes of this document, the following terms, definitions and abbreviations as well as the terms and definitions given in ISO/TS 80004-3 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at <https://www.iso.org/obp>

— IEC Electropedia: available at <http://www.electropedia.org/>

3.1 Terms and definitions

3.1.1

cellular uptake

internalization or association of a substance by a living cell

3.1.2

cell lysis

destruction or dissolution of cells with release of contents

3.1.3

absorbance

measure of the capacity of a substance to absorb light at a specified wavelength

3.2 Abbreviated terms


CNH	carbon nanohorn
CNM	carbon nanomaterial
CNT	carbon nanotube

SWCNT	single-wall carbon nanotube
MWCNT	multiwall carbon nanotube
PBS	phosphate-buffered saline
SDBS	sodium dodecylbenzene sulfonate
NIR	near infrared
UV	ultraviolet
Vis	visible

4 Method overview

4.1 General

When an optical beam goes through a solution sample, some of the beam is attenuated by the solution, and the rest is transmitted (see [Figure 1](#)). The amount of optical beam attenuated by the solution is related to the property of solution itself and the thickness of the solution sample.

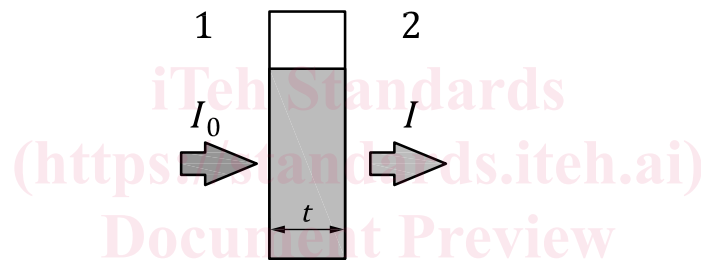

Key

- 1 incident light
- 2 transmitted light

Figure 1 — Optical attenuation by a solution sample

The optical absorbance is directly proportional to the concentration of the dissolved substance in a solution. When the concentration of solution is expressed as $\text{g}\cdot\text{l}^{-1}$, the relationship between absorbance and concentration can be written as follows.

$$A = \log_{10} (I_0/I) = k_m t c \tag{1}$$


where

- A is the optical absorbance of the solution sample;
- I_0 is the radiant fluxes of incident;
- I is the radiant fluxes of transmitted beams;
- k_m is the wavelength-dependent mass absorptivity coefficient with units of $\text{g}^{-1}\cdot\text{cm}^{-1}$;
- t is the thickness of the solution sample;
- c is the concentration of a substance dissolved in the solution sample expressed in units of $\text{g}\cdot\text{l}^{-1}$.

If A , k_m and t are known, then the concentration of a substance dissolved in the solution sample can be obtained. A is obtained by measurement, k_m is obtained by calibration using the known amount of the substance dissolved in the solution sample, and t is a fixed value determined by a cuvette optical pathlength for absorbance measurement.

4.2 Optical absorption of carbon nanomaterials

The optical absorption spectra of carbon nanomaterials in dispersion show a strong absorption peak in 300 nm to 200 nm (4 eV to 6 eV) that is attributed to the collective excitations of π electron systems (π -plasmons).^[9] This π -plasmon absorption peak can be also observed in most graphitic compounds.^[10] The peak is superimposed on the featureless background extending to the vis-NIR and IR regions. The typical spectra of SWCNTs, MWCNTs, CNHs, carbon blacks and graphene are shown in Figure 2. The broad non-resonant absorbance of MWCNTs, CNHs, carbon black, graphene and/or SWCNTs in vis-NIR region (e.g. 700 nm to 900 nm) is typical for most carbonaceous nanomaterials in samples.

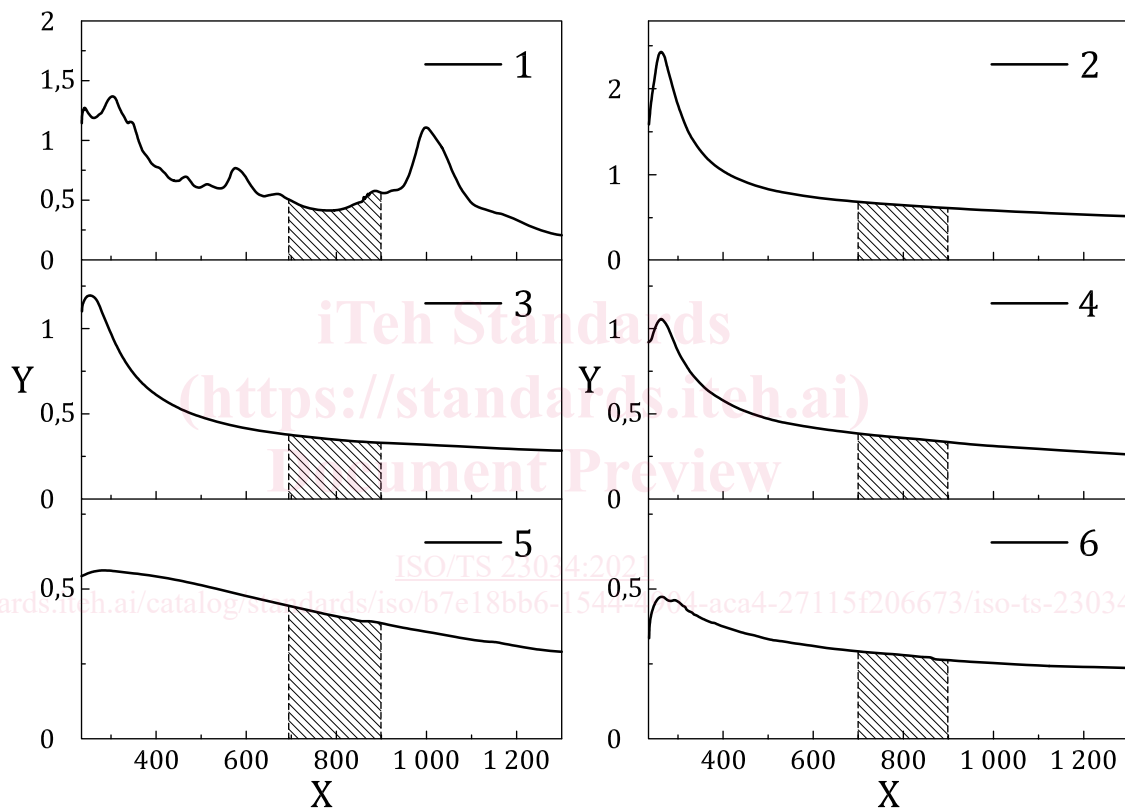

Key


X	wavelength (nm)	3	MWCNTs
Y	absorbance (arbitrary units)	4	CNHs
1	individual SWCNTs	5	carbon black
2	SWCNTs bundles	6	graphene

NOTE The oblique regions show the absorbance of each carbon nanomaterial in 700 nm to 900 nm.

Figure 2 — Typical absorption spectra of individual SWCNTs, SWCNT-bundles, MWCNTs, CNHs, carbon black and graphene nanoplates in dispersions

4.3 Optical absorption of biomolecules

Cell lysate may contain the bio-components, such as proteins, amino acids, fatty acids and DNA, which can absorb light at wavelengths ranged from 200 nm to 600 nm. Water has absorption in IR (> 1 000 nm) (see Figure 3). Because the absorption of the bio-components in the region of 650 nm to 900 nm is low, this region is always used for diagnosis and also called as therapeutic window^[11].

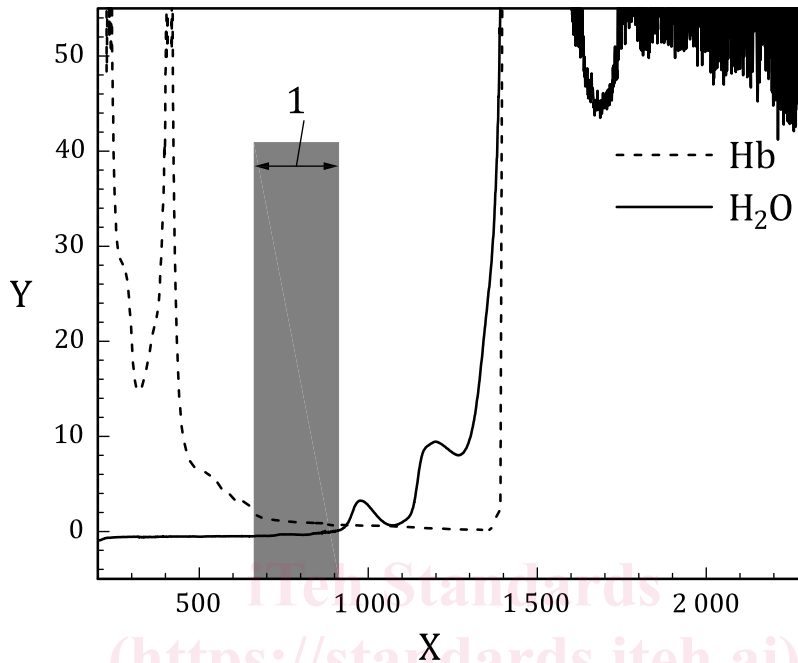

Key

- X wavelength (nm)
- Y absorbance (arbitrary units)
- 1 low absorption region

(https://standards.iteh.ai)
Document Preview

[ISO/TS 23034:2021](https://standards.iteh.ai/catalog/standards/iso/b7e18bb6-1544-4904-aca4-27115f206673/iso-ts-23034-2021)

<https://standards.iteh.ai/catalog/standards/iso/b7e18bb6-1544-4904-aca4-27115f206673/iso-ts-23034-2021>

Figure 3 — Absorption spectrum of haemoglobin (Hb) and water

4.4 Determination of the concentration of CNMs in dispersion by absorbance

As shown above, when the light wavelength and the path length of light are fixed, the amount of absorbed light by a certain CNM dispersion would be directly proportional to the concentration of the dispersed CNMs. Then based on a calibration curve obtained by known concentration and its corresponding absorbance, the unknown concentration of CNMs dispersion can be determined from its absorbance. Since most types of CNMs have absorbance in 700 nm to 900 nm where the components in cell lysis do not, any wavelength in this region (e.g. 750 nm) can be chosen to determine the concentration of CNMs dispersion.

NOTE This technique is limited to carbon nanomaterials that absorb strongly in the NIR region of 700 nm to 900 nm but that would not be suitable for some types of carbon nanomaterials such as nanodiamond and nanographene oxide, which have low absorbance in this region.

4.5 Case studies

Case studies with SWCNTs, CNHs and MWCNTs are presented in Annexes A, B and C respectively.

5 Materials and apparatus

5.1 Materials

5.1.1 Chemicals

5.1.1.1 Water, deionized and sterilized pure water, grade 1, in accordance with ISO 3696:1987.

5.1.1.2 Culture medium, with or without serum that meets the growth requirements of the selected cell line.

5.1.1.3 PBS (pH = 7,4).

5.1.1.4 Cell lysis reagent, a colourless buffer solution that contains detergents for mammalian cell lysis/extraction.

5.1.1.5 SDBS solution, SDBS powder dissolved in deionized pure water with concentration of 50 mg/ml.

5.1.1.6 Trypsin-EDTA (0,25 %).

5.1.2 Cell line

Established cell lines are preferred and shall be obtained from recognized repositories. They can be either adherent cells or floating cells.

5.2 Apparatus

5.2.1 UV-Vis-NIR spectrometer

A spectrophotometer covering a broad ultraviolet to NIR wavelength range shall be used. Equipment should be installed in a clean environment, while avoiding any electrical noise, mechanical vibrations, direct sunlight, etc.

The spectrophotometer should be turned on 30 min prior to the measurement to allow the baseline to stabilize. The spectrophotometer should be calibrated in the absorbance scale, where an absorptive filter of neutral optical density with a value close to zero may be used. An absorption spectrum of CNMs aqueous dispersion should be obtained against a reference of the solution that used for dissolution of cells [e.g. a mixture solution of SDBS and cell lysis reagent (1:1)].

5.2.2 Cuvette for optical absorption measurement

Quartz cuvette.

5.2.3 Incubator, 37 °C, humidified, 5 % CO₂/air.

5.2.4 Culture dishes, single-well or multi-well plates can be used. 6 multi-well plates with flat bottom are recommended.

5.2.5 Centrifuge.

Centrifuge tubes: Sterilized, 13-ml centrifuge tubes and 1,5 ml centrifuge micro-tubes.

Centrifuge: Refrigerated centrifuge equipped with rotors of 15-ml centrifuge tubes and 1 ml to 2 ml micro-tubes. The centrifuge speed in gravitation force is recommended to be 150 g.