

**Gaseous fire extinguishing systems — Physical properties and system design —
Part 5: FK-5-1-12 extinguishant**

**Systèmes d'extinction d'incendie utilisant des agents gazeux -- Propriétés physiques
et conception des systèmes -- Partie 5: Agent extincteur FK-5-1-12**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 14520-5:2019](https://standards.iteh.ai/catalog/standards/sist/3c4bea18-c8ff-4c3a-9d67-6d1bd4495e4d/iso-14520-5-2019)

<https://standards.iteh.ai/catalog/standards/sist/3c4bea18-c8ff-4c3a-9d67-6d1bd4495e4d/iso-14520-5-2019>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 21, *Equipment for fire protection and fire fighting*, Subcommittee SC 8, *Gaseous media and firefighting systems using gas*.

This third edition cancels and replaces the second edition (ISO 14520-5:2016), which has been technically revised. The main changes compared to the previous edition are as follows:

- a new subclause 6.4 on fill density and superpressurization levels has been added.

A list of all parts in the ISO 14520 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Gaseous fire extinguishing systems — Physical properties and system design — Part 5: FK-5-1-12 extinguishant

1 Scope

This document contains specific requirements for gaseous fire-extinguishing systems, with respect to FK-5-1-12 extinguishant. It includes details of physical properties, specifications, usage and safety aspects.

This document is applicable only to systems operating at nominal pressures of 25 bar, 34,5 bar, 42 bar and 50 bar with nitrogen propellant. This does not preclude the use of other systems.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 14520-1, *Gaseous fire-extinguishing systems — Physical properties and system design — Part 1: General requirements*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 14520-1 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

4 Characteristics and uses

4.1 General

Extinguishant FK-5-1-12 shall comply with the specification shown in Table 1.

FK-5-1-12 is a clear, colourless, almost odourless, electrically non-conductive gas with a density approximately 11 times that of air.

The physical properties are shown in Table 2.

FK-5-1-12 extinguishes fires mainly by physical means, but also by some chemical means.

Table 1 — Specification for FK-5-1-12

| Property | Requirement |
|----------|-------------|
|----------|-------------|

| | |
|------------------------------|----------------------------------|
| Purity | 99,0 % mol/mol min. |
| Acidity | 3×10^{-6} by mass, max. |
| Water content | 0,001 % by mass, max. |
| Non-volatile residue | 0,03 % by mass, max. |
| Suspended matter or sediment | None visible |

Table 2 — Physical properties of FK-5-1-12

| Property | Units | Value |
|--|---|---------|
| Molecular mass | n/a | 316,04 |
| Boiling point at 1 013 bar (absolute) | °C | 49,2 |
| Freezing point | °C | -108,0 |
| Critical temperature | °C | 168,66 |
| Critical pressure | bar | 18,646 |
| Critical volume | cc/mole | 494,5 |
| Critical density | kg/m ³ | 639,1 |
| Vapour pressure 20 °C | bar abs | 0,326 0 |
| Liquid density 20 °C | g/ml | 1,616 |
| Saturated vapour density 20 °C | kg/m ³ | 4,330 5 |
| Specific volume of superheated vapour at 1 013 bar and 20 °C | m ³ /kg | 0,071 9 |
| Heat of vapourization at boiling point | KJ/kg | 88,0 |
| Chemical formula | CF ₃ CF ₂ C(O)CF(CF ₃) ₂ | |
| Chemical name | Dodecafluoro-2-methylpentan-3-one | |

4.2 Use of FK-5-1-12 systems

FK-5-1-12 total flooding systems may be used for extinguishing fires of all classes within the limits specified in ISO 14520-1:2015, Clause 4.

The extinguishant requirements per volume of protected space are shown in Table 3 for various levels of concentration. These are based on methods shown in ISO 14520-1:2015, 7.6.

The extinguishing concentrations and design concentrations for heptane and Surface Class A hazards are shown in Table 4. Concentrations for other fuels are shown in Table 5 and inerting concentrations in Table 6.

Table 3 — FK-5-1-12 total flooding quantity

| Temperature <i>T</i> °C | Specific volume <i>S</i> m ³ /kg | FK-5-1-12 mass requirements per unit volume of protected space, <i>m/V</i> (kg/m ³) | | | | | | | |
|-------------------------------|---|---|---------|---------|---------|---------|---------|---------|---------|
| | | Design concentration (by volume) | | | | | | | |
| | | 3 % | 4 % | 5 % | 6 % | 7 % | 8 % | 9 % | 10 % |
| -20 | 0,060 9 | 0,507 7 | 0,684 0 | 0,864 0 | 1,040 7 | 1,235 7 | 1,427 5 | 1,623 6 | 1,824 1 |

| | | | | | | | | | |
|-----|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| -15 | 0,062 3 | 0,496 5 | 0,669 0 | 0,845 0 | 1,024 8 | 1,208 4 | 1,396 1 | 1,587 9 | 1,783 9 |
| -10 | 0,063 7 | 0,485 9 | 0,654 5 | 0,826 8 | 1,002 7 | 1,182 4 | 1,366 0 | 1,553 7 | 1,745 5 |
| -5 | 0,065 0 | 0,475 6 | 0,640 7 | 0,809 4 | 0,981 6 | 1,157 5 | 1,337 2 | 1,520 9 | 1,708 7 |
| 0 | 0,066 4 | 0,465 8 | 0,627 5 | 0,792 6 | 0,961 3 | 1,133 6 | 1,309 6 | 1,489 5 | 1,673 4 |
| 5 | 0,067 8 | 0,456 4 | 0,614 8 | 0,776 6 | 0,941 8 | 1,110 6 | 1,283 1 | 1,459 3 | 1,639 5 |
| 10 | 0,069 1 | 0,447 3 | 0,602 6 | 0,761 2 | 0,923 2 | 1,088 6 | 1,257 6 | 1,430 4 | 1,607 0 |
| 15 | 0,070 5 | 0,438 6 | 0,590 9 | 0,746 4 | 0,905 2 | 1,067 4 | 1,233 2 | 1,402 6 | 1,575 7 |
| 20 | 0,071 9 | 0,430 2 | 0,579 6 | 0,732 2 | 0,887 9 | 1,047 1 | 1,209 6 | 1,375 8 | 1,545 7 |
| 25 | 0,073 3 | 0,422 2 | 0,568 8 | 0,718 4 | 0,871 3 | 1,027 5 | 1,187 0 | 1,350 0 | 1,516 7 |
| 30 | 0,074 6 | 0,414 4 | 0,558 3 | 0,705 2 | 0,855 3 | 1,008 6 | 1,165 2 | 1,325 2 | 1,488 8 |
| 35 | 0,076 0 | 0,406 9 | 0,548 2 | 0,692 5 | 0,839 9 | 0,990 4 | 1,144 2 | 1,301 3 | 1,462 0 |
| 40 | 0,077 4 | 0,399 7 | 0,538 5 | 0,680 2 | 0,825 0 | 0,972 8 | 1,123 9 | 1,278 3 | 1,436 1 |
| 45 | 0,078 7 | 0,392 8 | 0,529 1 | 0,668 4 | 0,810 6 | 0,955 9 | 1,104 3 | 1,256 0 | 1,411 1 |
| 50 | 0,080 1 | 0,386 0 | 0,520 1 | 0,657 0 | 0,796 7 | 0,939 5 | 1,085 4 | 1,234 5 | 1,386 9 |
| 55 | 0,081 5 | 0,379 5 | 0,511 3 | 0,645 9 | 0,783 3 | 0,923 7 | 1,067 1 | 1,213 7 | 1,363 6 |
| 60 | 0,082 9 | 0,373 3 | 0,502 9 | 0,635 2 | 0,770 4 | 0,908 4 | 1,049 5 | 1,193 6 | 1,341 0 |
| 65 | 0,084 2 | 0,367 2 | 0,494 7 | 0,624 7 | 0,757 8 | 0,893 6 | 1,032 4 | 1,174 2 | 1,319 1 |
| 70 | 0,085 6 | 0,361 3 | 0,486 8 | 0,614 8 | 0,745 7 | 0,879 3 | 1,015 8 | 1,155 4 | 1,298 0 |
| 75 | 0,0870 | 0,355 6 | 0,479 1 | 0,605 2 | 0,733 9 | 0,865 4 | 0,999 8 | 1,137 2 | 1,277 5 |
| 80 | 0,088 3 | 0,350 1 | 0,471 6 | 0,595 8 | 0,722 5 | 0,852 0 | 0,984 3 | 1,119 5 | 1,257 7 |
| 85 | 0,089 7 | 0,344 7 | 0,464 4 | 0,586 6 | 0,711 5 | 0,839 0 | 0,969 2 | 1,102 4 | 1,238 5 |
| 90 | 0,091 1 | 0,339 5 | 0,457 4 | 0,577 8 | 0,700 8 | 0,826 3 | 0,954 7 | 1,085 8 | 1,219 8 |
| 95 | 0,092 5 | 0,334 5 | 0,450 7 | 0,569 2 | 0,690 4 | 0,814 1 | 0,940 5 | 1,069 7 | 1,201 4 |
| 100 | 0,093 8 | 0,329 6 | 0,444 1 | 0,560 9 | 0,680 3 | 0,802 2 | 0,926 7 | 1,054 0 | 1,184 2 |

NOTE This information refers only to FK-5-1-12 and does not represent any other product containing dodecafluoromethylpentan-3-one as a component.

Symbols:

m/V is the agent mass requirements (kg/m^3), i.e. mass, m , in kilograms of agent required per cubic metre of protected volume, V , to produce the indicated concentration at the temperature specified;

V is the net volume of hazard (m^3), i.e. the enclosed volume minus the fixed structures impervious to extinguishant

$$m = \left(\frac{c}{100 - c} \right) \frac{V}{S}$$

T is the temperature ($^{\circ}\text{C}$), i.e. the design temperature in the hazard area;

S is the specific volume (m^3/kg), the specific volume of superheated FK-5-1-12 vapour at a pressure of 1,013 bar may be approximated by the formula:

$$S = k_1 + k_2 T$$

where

$$k_1 = 0,066 4;$$

$$k_2 = 0,000 274.$$

c is the concentration (%), i.e. the volumetric concentration of FK-5-1-12 in air at the temperature indicated and a pressure of 1,013 bar absolute.

Table 4 — FK-5-1-12 reference extinguishing and design concentrations

| Fuel | Extinguishment % by volume | Minimum design % by volume |
|-----------------------|-------------------------------|-------------------------------|
| Class B | | |
| Heptane (cup burner) | 4,5 | 5,9 |
| Heptane (room test) | 4,4 | |
| Surface Class A | | |
| Wood crib | 3,4 | |
| PMMA | 4,1 | 5,3 |
| PP | 4,0 | |
| ABS | 4,0 | |
| Higher Hazard Class A | See NOTE 4 | 5,6 |

NOTE 1 The extinguishment values for the Class B and the Surface Class A fuels are determined by testing in accordance with ISO 14520-1:2015, Annexes B and C.

NOTE 2 The minimum design concentration for the Class B fuel is the higher value of the heptane cup burner or room test heptane extinguishment concentration multiplied by 1,3.

NOTE 3 The minimum design concentration for Surface Class A fuel is the highest value of the wood crib, PMMA, PP or ABS extinguishment concentrations multiplied by 1,3. In the absence of any of the four extinguishment values, the minimum design concentration for Surface Class A is that of Higher Hazard Class A.

NOTE 4 The minimum design concentration for Higher Hazard Class A fuels is the higher of the Surface Class A or 95 % of the Class B minimum design concentration.

NOTE 5 See ISO 14520-1:2015, 7.5.1.3 for guidance on Class A fuels.

Table 5 — FK-5-1-12 concentrations for other fuels

| Fuel | Extinguishment % by volume | Minimum design % by volume |
|---------------------|-------------------------------|-------------------------------|
| Acetone | 4,5 | 5,9 |
| Ethyl alcohol | 5,5 | 7,2 |
| Marine diesel | 4,5 | 5,9 |
| Methyl alcohol | 6,5 | 8,5 |
| Methyl ethyl ketone | 4,5 | 5,9 |
| <i>n</i> -heptane | 4,5 | 5,9 |
| Technical heptane | 4,5 | 5,9 |

NOTE 1 Extinguishing concentrations for all Class B fuels listed were derived in accordance with ISO 14520-1:2015, Annex B.

NOTE 2 Minimum design values have been increased to the minimum design concentration established for heptane in accordance with ISO 14520-1:2015, 7.5.1.

Table 6 — FK-5-1-12 inerting and design concentrations

| Fuel | Inertion % | Minimum design % |
|------|---------------|---------------------|
|------|---------------|---------------------|

| | | |
|---|-----|-----|
| Methane | 8,8 | 9,7 |
| Propane | 8,1 | 8,9 |
| NOTE Determined in accordance with ISO 14520-1. | | |

5 Safety of personnel

Any hazard to personnel created by the discharge of FK-5-1-12 shall be considered in the design of the system.

Potential hazards can arise from the following:

- a) the extinguishant itself;
- b) the combustion products of the fire;
- c) the breakdown products of the extinguishant resulting from exposure to fire.

For minimum safety requirements, see ISO 14520-1:2015, Clause 5.

Toxicological information for FK-5-1-12 is shown in Table 7.

Table 7 — Toxicological information for FK-5-1-12

| Property | Value |
|--|-------|
| | % |
| 4 h LC ₅₀ | >10 % |
| No observed adverse effect level (NOAEL) | 10 % |
| Lowest observed adverse effect level (LOAEL) | >10 % |
| NOTE LC ₅₀ is the concentration lethal to 50 % of the rat population during a 4 h exposure. | |

6 System design

6.1 Fill density

The fill density of the container shall not exceed the values shown in Tables 8 to 11 for 25 bar, 34,5 bar, 42 bar or 50 bar systems.

Exceeding the maximum fill density may result in the container becoming "liquid full", with the effect that an extremely high rise in pressure occurs with small increases in temperature, which could adversely affect the integrity of the container assembly.

The relationships between pressure and temperature are shown in Figure 1 for various levels of fill density.

Table 8 — 25 bar storage container characteristics for FK-5-1-12

| Property | Unit | Value |
|---|-------------------|-------|
| Maximum fill density | kg/m ³ | 1 480 |
| Maximum container working pressure at 50 °C | bar (gauge) | 29 |

| | | |
|---|----------------|----|
| Superpressurization at 20 °C | bar (gauge) | 25 |
| NOTE Figure 1 shows further data on pressure/temperature relationships. | | |

Table 9 — 34,5 bar storage container characteristics for FK-5-1-12

| Property | Unit | Value |
|---|-------------------|-------|
| Maximum fill density | kg/m ³ | 1 200 |
| Maximum container pressure at 50 °C | bar (absolute) | 48 |
| Superpressurization at 20 °C | bar (absolute) | 34,5 |
| NOTE Figure 2 shows further data on pressure/temperature relationships. | | |

Table 10 — 42 bar storage container characteristics for FK-5-1-12

| Property | Unit | Value |
|---|-------------------|-------|
| Maximum fill density | kg/m ³ | 1 440 |
| Maximum container pressure at 50 °C | bar (absolute) | 38 |
| Superpressurization at 20 °C | bar (absolute) | 42 |
| NOTE Figure 3 shows further data on pressure/temperature relationships. | | |

Table 11 — 50 bar storage container characteristics for FK-5-1-12

| Property | Unit | Value |
|---|-------------------|-------|
| Maximum fill density | kg/m ³ | 1 200 |
| Maximum container pressure at 50 °C | bar (absolute) | 57 |
| Superpressurization at 20 °C | bar (absolute) | 50 |
| NOTE Figure 4 shows further data on pressure/temperature relationships. | | |

6.2 Superpressurization


Containers shall be superpressurized with nitrogen with a moisture content of not more than 60×10^{-6} by mass to an equilibrium pressure of 25 bar $^{+5}_0\%$, 34,5 bar $^{+5}_0\%$, 42 bar $^{+5}_0\%$ or 50 bar $^{+5}_0\%$ at a temperature of 20 °C.

6.3 Extinguishant quantity

The quantity of extinguishant shall be the minimum required to achieve the design concentration within the hazard volume at the minimum expected temperature, determined using Table 3 and the method in ISO 14520-1:2015, 7.6.

The design concentrations shall be that specified for relevant hazards shown in Table 4. This includes at least a 1,3 safety factor on the extinguishing concentration.

Consideration should be given to increasing this for particular hazards and seeking advice from the relevant authority.

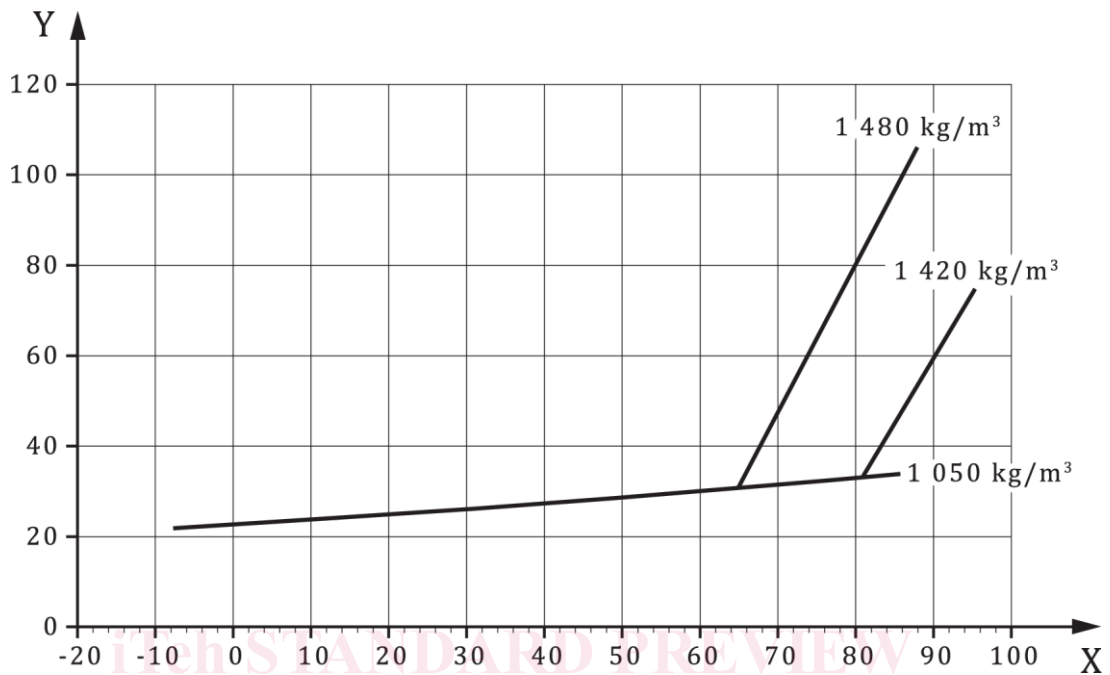


Key

X temperature, °C


Y pressure, bar

Figure 1 — Temperature/pressure graph for FK- 5-1-12 superpressurized with nitrogen 25 bar at 20 °C

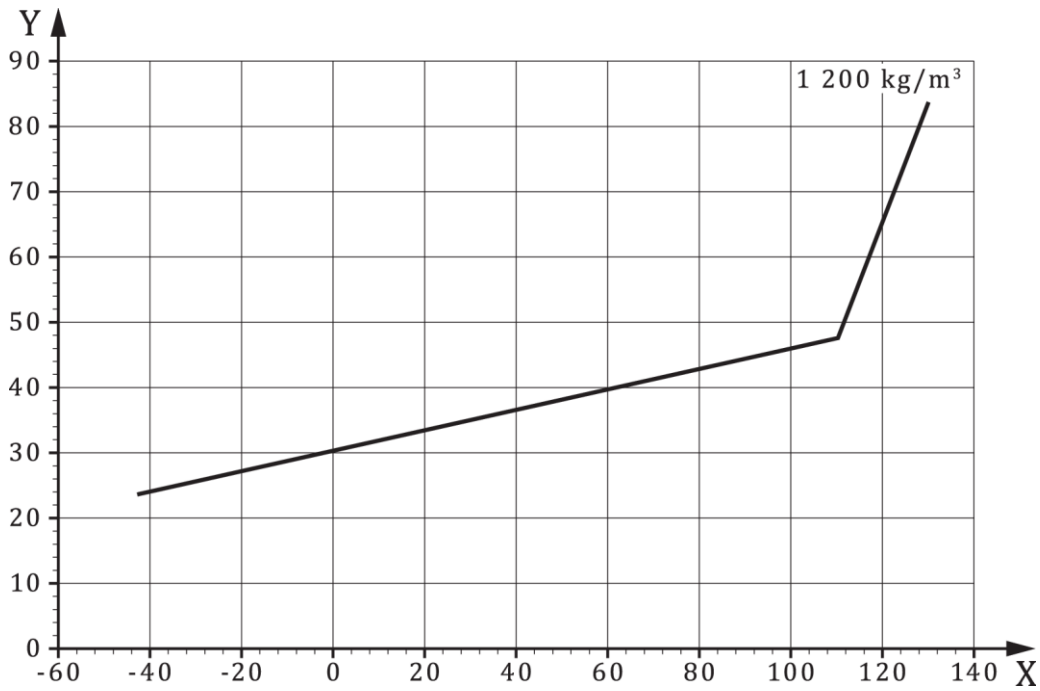

Key
 X temperature, °C
 Y pressure, bar

Figure 2 — Temperature/pressure graph for FK- 5-1-12 superpressurized with nitrogen to 34,5 bar at 20 °C

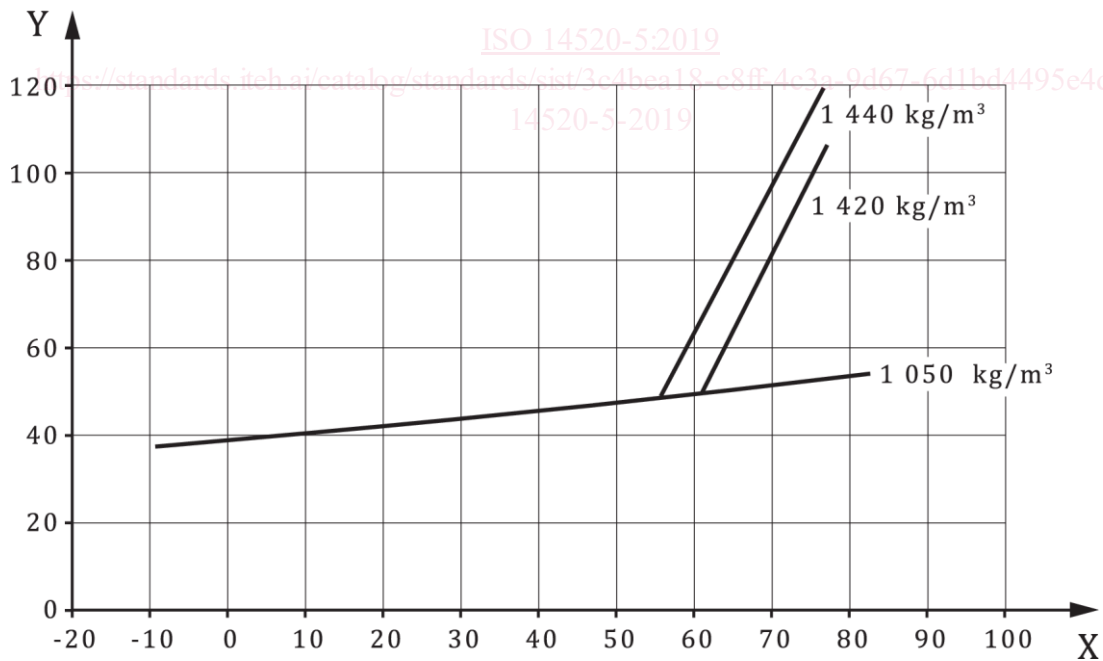

Key
 X temperature, °C
 Y pressure, bar