

ISO/TC 8/SC 4

Secretariat: SAC

Voting begins on:  
2020-05-27

Voting terminates on:  
2020-07-22

---

---

## **Ships and marine technology — Ship's mooring and towing fittings — Seats for mooring chocks**

**ITEH STANDARD PREVIEW**  
(standards.iteh.ai)  
Full standard:  
<https://standards.iteh.ai/catalog/standards/sist/ecaf6451-dce6-41e0-af77-5e675acd0a18/iso-fdis-23115>

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.



---

---

Reference number  
ISO/FDIS 23115:2020(E)

**iTeh STANDARD PREVIEW**  
(standards.iteh.ai)  
Full standard:  
<https://standards.iteh.ai/catalog/standards/sist/ecaf6451-dce6-41e0-af77-5e675acd0a18/iso-fdis-23115>



## **COPYRIGHT PROTECTED DOCUMENT**

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Fax: +41 22 749 09 47  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

	Page
Foreword .....	iv
Introduction .....	v
1 Scope .....	1
2 Normative references .....	1
3 Terms and definitions .....	1
4 Classification .....	1
4.1 Type .....	1
4.2 Nominal sizes .....	1
5 Dimensions .....	2
6 Materials .....	2
7 Construction .....	2
8 Manufacturing and inspection .....	2
9 Marking .....	2
Annex A (normative) Basis for strength assessment of the seats for mooring chocks .....	9
Bibliography .....	13

iTeh STANDARD PREVIEW  
 (standards.iteh.ai)  
 Full standard:  
<https://standards.iteh.ai/catalog/standards/sis/ecad451-dce6-41e0-af77-5e675acd0a18/iso-fdis-23115>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared Technical Committee ISO/TC 8, *Ships and marine technology*, Subcommittee SC 4, *Outfitting and deck machinery*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

## Introduction

The seat for mooring chocks is a seat type of ship's mooring and towing fitting installed on the shipside to lead the mooring and towing rope from the ship's inboard to outboard.

**iTeh STANDARD PREVIEW**  
(standards.iteh.ai)  
Full standard:  
<https://standards.iteh.ai/catalog/standards/sist/ecaf6451-dce6-41e0-af77-5e675acd0a18/iso-fdis-23115>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

Full standard:  
<https://standards.iteh.ai/catalog/standards/sist/ecaf6451-dce6-41e0-af77-5e675acd0a18/iso-fdis-23115>

# Ships and marine technology — Ship's mooring and towing fittings — Seats for mooring chocks

## 1 Scope

This document specifies the types, nominal sizes, dimensions and materials, as well as construction, manufacturing and marking requirements, for the seats for mooring chocks installed to lead the mooring and towing rope of a ship.

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IMO Circular MSC/Circ.1175, *Guidance on shipboard towing and mooring equipment*

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

### 3.1

#### **safe working load**

#### **SWL**

safe load limit (maximum permissible load) of the fittings used for mooring and towing

## 4 Classification

### 4.1 Type

The seat for mooring chocks shall be classified by its installation site as belonging to one of the following types:

- a) Type A: seat for deck-mounted mooring chock;
- b) Type B: seat for deck and side shell-mounted mooring chock;
- c) Type C: brackets for bulwark-mounted mooring chock.

### 4.2 Nominal sizes

The nominal sizes of seats for mooring chocks are denoted by reference to the same nominal sizes of mooring chocks (ISO 13713). For the seats for mooring chocks having the same size, the letter of the alphabet, i.e. A, B or C, is followed by the nominal size for the different safe working loads (SWL).

The nominal sizes are:

250 × 200, 300 × 250, 350 × 250, 400 × 250, 450 × 250, 500 × 250A, 500 × 250B

## 5 Dimensions

The seats for mooring chocks shall have dimensions and particulars in accordance with [Tables 1, 2 and 3](#), and [Figures 1, 2 and 3](#).

## 6 Materials

Weldable steel plates having a yield point of not less than 235 N/mm<sup>2</sup> shall be used for manufacturing the seats for mooring chocks.

## 7 Construction

The foundation of the mooring chocks shall be determined by considering the actual load direction. The foundation and welding connections to the hull shall guarantee a reliable transmission of the maximum loading of the mooring chocks to the hull construction without any plastic deformation or cracks.

## 8 Manufacturing and inspection

**8.1** All surfaces of the seats for mooring chocks, including welded surfaces, shall be free from any visible flaws or imperfections.

**8.2** All surfaces in contact with the ropes shall be free from surface roughness or irregularities likely to cause damage to the ropes by abrasion.

**8.3** The seats for mooring chocks shall be coated externally with an anti-corrosion protective finish.

## 9 Marking

**9.1** The SWL for the intended use of the seats for mooring chocks shall be noted in the towing and mooring plan available on board for the guidance of the shipmaster, as specified in IMO circular MSC/Circ.1175.

**9.2** The actual SWL on board shall be determined by considering the under deck reinforcement, and it shall be marked on the towing and mooring plan. The actual SWL shall not be over the SWL indicated in this document.


**9.3** The seats for mooring chocks shall be clearly marked with their SWL by weld bead or equivalent. The SWL shall be expressed in tonnes (symbol 't') and be placed so that it is not obscured during operation of the fitting.

EXAMPLE      SWL XXX t

**9.4** The SWL mark shall be placed on the seat of the chock or on the deck.



Dimensions in millimetres

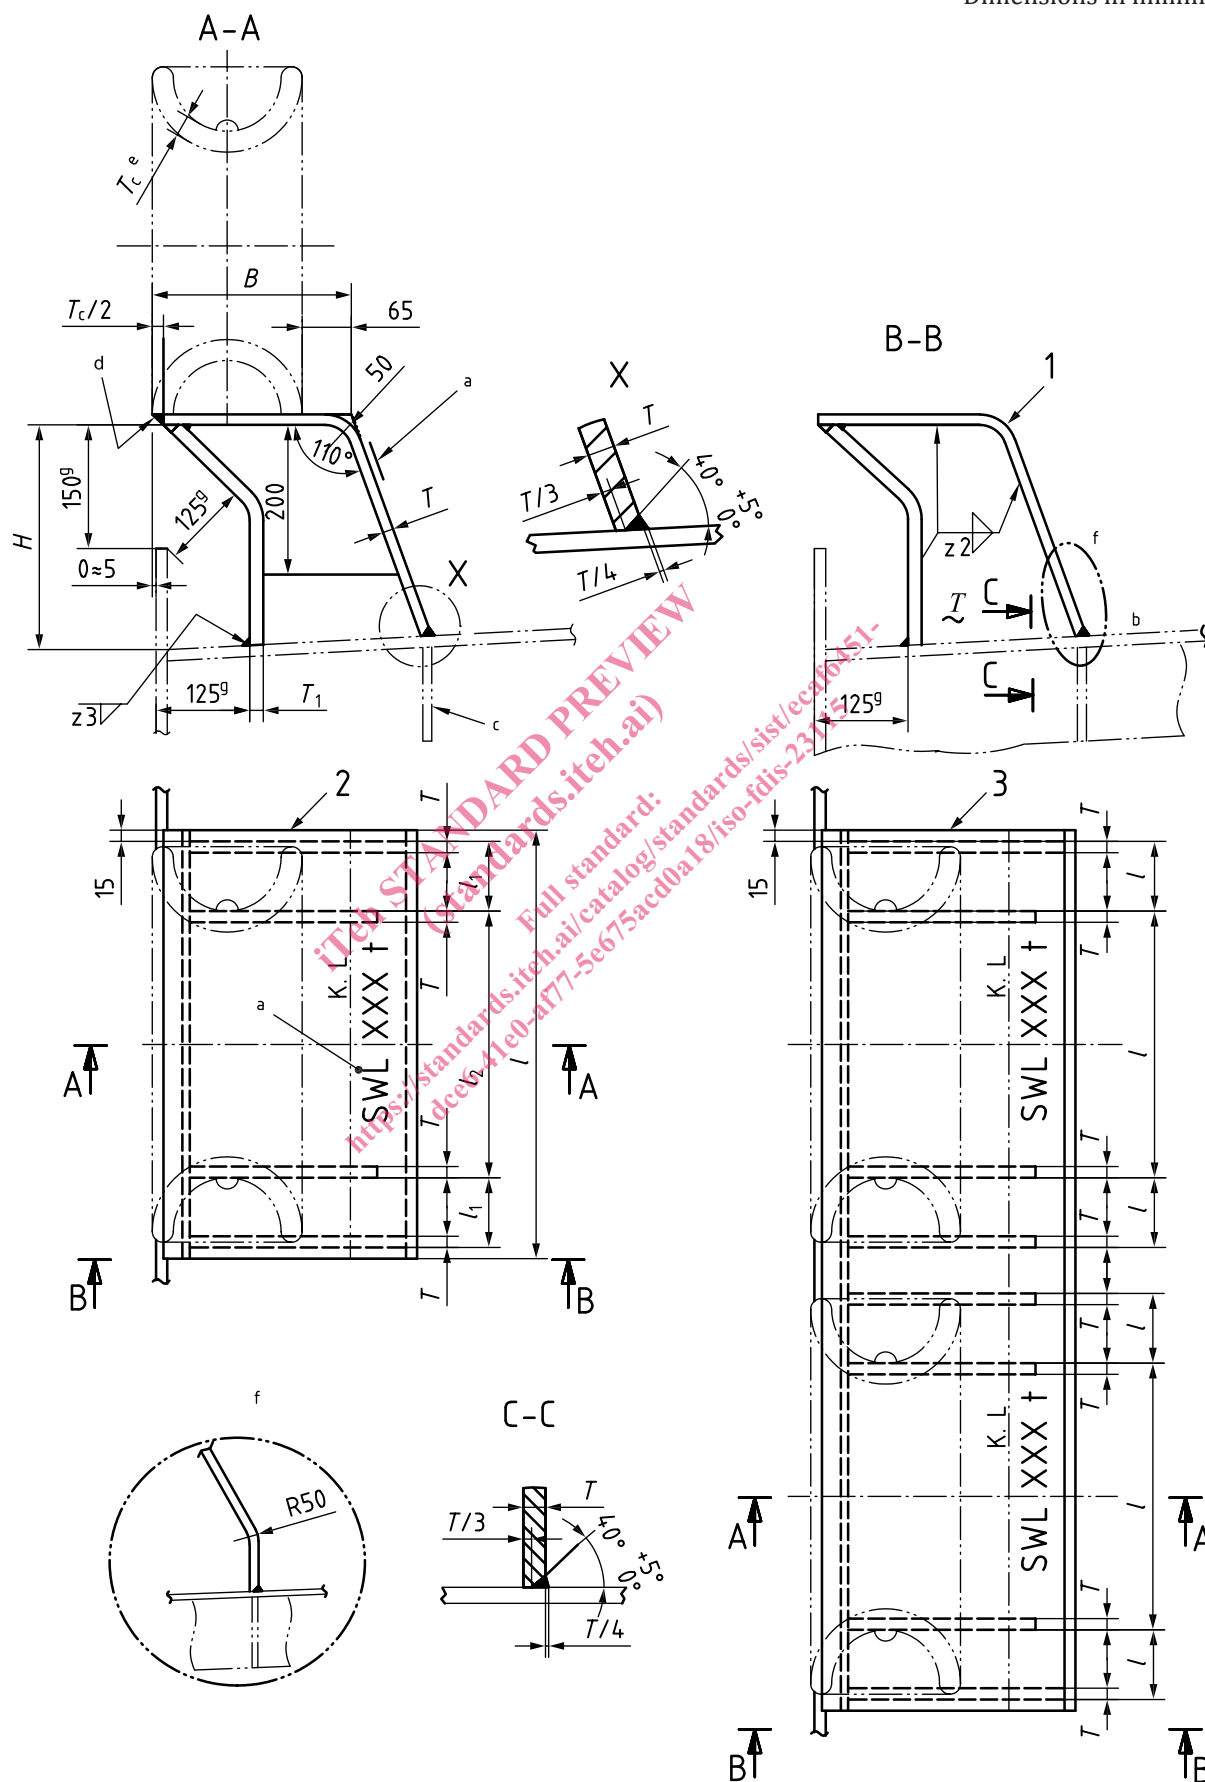

### Key

- 1 seat for mooring chock
- 2 seat for single mooring chock
- 3 seat for double mooring chock
- a SWL marking.
- b Deck.
- c Under carling.
- d Smooth grinding.
- e Thickness of mooring chock (refer to ISO 13713).
- f Alternative application method.
- g Minimum height (may be adjusted depending on welding workability).

The height of seat for the mooring chock ( $H$ ) shall be determined in accordance with the hull construction design.  
K.L is the knuckle line.

**Figure 1 — Type A — Seats for deck-mounted mooring chocks**

**Table 1 — Dimensions and SWL of Type A — Seats for deck-mounted mooring chocks**

Dimensions in millimetres

Nominal size $L \times H$	$I$	$I_1$	$I_2$	$B$	$T$	$T_1$	Welding leg length <sup>a</sup>			SWL <sup>b</sup>		Calculated weight <sup>c</sup> kg
							$z_1$	$z_2$	$z_3$	kN	t	
250 × 200	494	87	290	225	20	16	10	14	12	353	36	90
300 × 250	588	107	344	265	22	24	11	16	17	491	50	125
350 × 250	660	118	394	285	22	24	11	16	17	589	60	143
400 × 250	734	130	444	305	22	30	11	16	21	736	75	171
450 × 250	818	141	506	325	28	34	14	20	24	981	100	231
500 × 250A	892	151	560	345	30	36	15	21	26	1 128	115	270
500 × 250B	904	153	568	345	34	40	17	24	28	1 373	140	302

<sup>a</sup> The welding method may be changed based on the same welding volume/strength.

<sup>b</sup> The SWLs shown are for reference only. These are based on the loadings as mentioned in [Annex A](#). The strength of the seat for the closed chocks was evaluated on the basis of a seat height of 300 mm.

The “SWL” which is marked on the fitting may be adjusted depending on the actual loading conditions of mooring rope under the agreement between the user and the manufacturer.

<sup>c</sup> The calculated weight (mass) is for reference only, which was calculated on the basis of a seat height of 300 mm for single chock excluding the mooring chock itself.