
**Ships and marine technology —
Ship's mooring and towing fittings —
Recessed bitts (steel plate type)**

*Navires et technologie maritime — Corps-morts et ferrures de
remorquage de navires — Bittes d'amarrage encastrées (type plaques
d'acier)*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 13798:2020

<https://standards.iteh.ai/catalog/standards/sist/63961556-8a71-4686-b91a-c6de808c017d/iso-13798-2020>



iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 13798:2020

<https://standards.iteh.ai/catalog/standards/sist/63961556-8a71-4686-b91a-c6de808c017d/iso-13798-2020>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

| | |
|---|-----------|
| Foreword | iv |
| Introduction | v |
| 1 Scope | 1 |
| 2 Normative references | 1 |
| 3 Terms and definitions | 1 |
| 4 Classification | 1 |
| 4.1 Type..... | 1 |
| 4.2 Nominal sizes..... | 1 |
| 5 Dimensions | 2 |
| 6 Materials | 2 |
| 7 Construction | 2 |
| 8 Manufacturing and inspection | 2 |
| 9 Marking | 2 |
| Annex A (normative) Basis for strength assessment of recessed bitts (steel plate type) | 4 |
| Bibliography | 6 |

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 13798:2020

<https://standards.iteh.ai/catalog/standards/sist/63961556-8a71-4686-b91a-c6de808c017d/iso-13798-2020>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared Technical Committee ISO/TC 8, *Ships and marine technology*, Subcommittee SC 4, *Outfitting and deck machinery*.

This second edition cancels and replaces the first edition (ISO 13798:2012), which has been technically revised.

The main changes compared to the previous edition are as follows:

- the definition of SWL (3.1) has been reworded;
- the leader line in Figure 1 has been amended.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The recessed bitt is a type of ship's towing fitting installed on the side shell of the ship.

Recessed bitts are normally provided to easily attach the towing lines where the height of the mooring deck is too high.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 13798:2020

<https://standards.iteh.ai/catalog/standards/sist/63961556-8a71-4686-b91a-c6de808c017d/iso-13798-2020>

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

ISO 13798:2020

<https://standards.iteh.ai/catalog/standards/sist/63961556-8a71-4686-b91a-c6de808c017d/iso-13798-2020>

Ships and marine technology — Ship's mooring and towing fittings — Recessed bitts (steel plate type)

1 Scope

This document specifies the types, nominal sizes, dimensions and materials, as well as construction, manufacturing and marking requirements, for steel plate type recessed bitts to meet normal towing requirements.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IMO Circular MSC/Circ.1175, *Guidance on shipboard towing and mooring equipment*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

3.1

safe working load

SWL

safe load limit (maximum permissible load) of the fittings used for mooring and towing

4 Classification

4.1 Type

Depending on the manufacturing method, recessed bitts shall be classified as belonging to one of the following two types:

- a) Type A: manufactured by steel pipes;
- b) Type B: manufactured by steel plates.

4.2 Nominal sizes

The nominal sizes, D_n , of recessed bitts are denoted by reference to the outside diameter of the main post, in millimetres, in terms of the nearest number drawn from a basic series of preferred numbers. For the recessed bitts having the same post diameter, the letter of the alphabet, i.e. A or B, is followed by the nominal size for the different SWL.

The nominal sizes are 200, 250, 400A and 400B.

5 Dimensions

Recessed bitts shall have dimensions and particulars in accordance with [Table 1](#) and [Figure 1](#).

6 Materials

The following materials shall be used for manufacturing the recessed bitts:

- a) Type B: weldable steel plates having a yield point of not less than 235 N/mm²;
- b) Type A: weldable steel pipes having a yield point of not less than 215 N/mm² or equivalent.

7 Construction

7.1 The posts of the recessed bitts shall be constructed from steel pipes or formed from plate.

7.2 The recess boxes for the installation of the recessed bitt shall be designed with enough space for easy connection of the towing rope. The recess boxes shall be designed to prevent the chafing and damage of the towing rope as much as possible, and shall have enough strength as a part of the hull construction.

8 Manufacturing and inspection

8.1 All surfaces of the recessed bitts, including welded surfaces, shall be free from any visible flaws or imperfections.

8.2 All surfaces in contact with the ropes shall be free from surface roughness or irregularities likely to cause damage to the ropes by abrasion.

8.3 The recessed bitts shall be coated externally with an anti-corrosion protective finish.

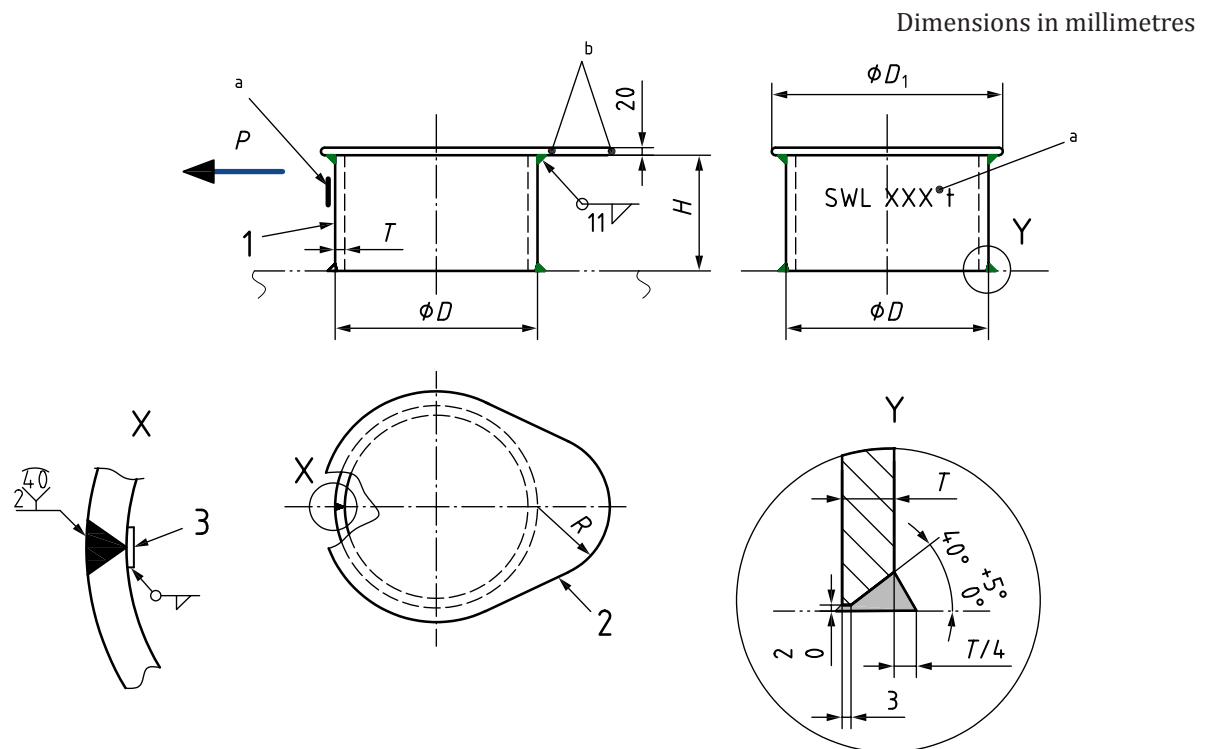
9 Marking

9.1 The safe working load (SWL) for the intended use of the recessed bitts shall be noted in the towing and mooring plan available on board for the guidance of the shipmaster, as specified in IMO circular MSC/Circ.1175.

9.2 The actual SWL on board shall be determined by considering the reinforcement around the recess box, and it shall be marked on the towing and mooring plan. The actual SWL shall not be over the SWL indicated in this document.

9.3 The recessed bitts shall be clearly marked with their SWL by weld bead or equivalent. The SWL shall be expressed in tonnes (symbol 't') and be placed so that it is not obscured during operation of the fitting.

EXAMPLE SWL XXX t.

**Key**

- 1 main post
 2 top plate
 3 chill strip
 P towing force
 a SWL marking.
 b Smooth grinding.

iTeh STANDARD PREVIEW
 (standards.iteh.ai)

ISO 13798:2020

<https://standards.iteh.ai/catalog/standards/sist/63961556-8a71-4686-b91a-c6de808c017d/iso-13798-2020>

Figure 1 — Type A (for nominal sizes 150, 200, 250A and 250B)

Table 1 — Dimensions and SWL of recessed bitts

Dimensions in millimetres

| Nominal size D_n | Type | D | D_1 | R | H | T | SWL ^b | | Calculated weight ^c kg |
|-----------------------|--------|-------|-------|-----|-----|------|------------------|-----|--------------------------------------|
| | | | | | | | kN | t | |
| 200 | Type A | 216,3 | 250 | 80 | 140 | 10,3 | 294 | 30 | 16,5 |
| | Type B | 210,0 | | | | 10,0 | | | 16,1 |
| 250 | Type A | 267,4 | 305 | 100 | 160 | 12,7 | 491 | 50 | 26,7 |
| | Type B | 260,0 | | | | 12,0 | | | 25,7 |
| 400A | Type A | 406,4 | 480 | 140 | 300 | 12,7 | 687 | 70 | 69,7 |
| | Type B | 410,0 | | | | 12,0 | | | 68,0 |
| 400B | Type A | 406,4 | 480 | 140 | 330 | 21,4 | 1 177 | 120 | 99,7 |
| | Type B | 410,0 | | | | 20,0 | | | 96,1 |

^a Welding with chamfering is available based on the same welding volume/strength.

^b The SWL which is marked on the fitting is the maximum applicable rope tension.

The SWLs shown in this table are for reference only. These are based on the loadings as mentioned in [Annex A](#).

^c The calculated weight (mass) is for reference only.