

---

---

---

**Road vehicles — Data communication  
between sensors and data fusion unit  
for automated driving functions —  
Logical interface**

*Véhicules routiers — Communication de données entre capteurs et  
unité de fusion de données pour les fonctions de conduite automatisée*

**iTeH Standards**

**(<https://standards.iteh.ai>)**  
**Document Preview**

[ISO 23150:2021](https://standards.iteh.ai/catalog/standards/iso/318b7f5d-0813-48d4-8f06-d657645f56a9/iso-23150-2021)

<https://standards.iteh.ai/catalog/standards/iso/318b7f5d-0813-48d4-8f06-d657645f56a9/iso-23150-2021>



Reference number  
ISO 23150:2021(E)

**iTeh Standards**  
**(<https://standards.iteh.ai>)**  
**Document Preview**

[ISO 23150:2021](#)

<https://standards.iteh.ai/catalog/standards/iso/318b7f5d-0813-48d4-8f06-d657645f56a9/iso-23150-2021>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

<b>Foreword</b>	<b>v</b>
<b>Introduction</b>	<b>vi</b>
<b>1 Scope</b>	<b>1</b>
<b>2 Normative references</b>	<b>1</b>
<b>3 Terms and definitions</b>	<b>1</b>
3.1 Architectural components	1
3.2 Level of detail terms	2
3.3 Structure terms	3
3.4 Measurement terms	3
3.5 Requirement level terms	5
3.6 Road user relevant entity types	5
3.7 Axis and coordinate system terms	7
<b>4 Abbreviated terms</b>	<b>11</b>
<b>5 Structure of the interface description</b>	<b>12</b>
5.1 General	12
5.2 Signal	13
5.3 Interface	13
5.4 Specific signal grouping	14
5.5 Profile	15
<b>6 Logical interface from a sensor as well as a sensor cluster to a fusion unit</b>	<b>15</b>
6.1 General	15
6.2 Generic interface header	18
6.3 Generic interface entity	18
6.4 Profile: Uniqueness of interface versioning	18
<b>7 Object level</b>	<b>19</b>
7.1 General	19
7.2 Generic object level interface	19
7.2.1 Generic object level header	20
7.2.2 Generic object level entity	20
7.3 Potentially moving object interface	21
7.3.1 Potentially moving object header	27
7.3.2 Potentially moving object entity	28
7.3.3 Profile: Motion	29
7.4 Road object interface	30
7.4.1 Road object header	40
7.4.2 Road object entity	42
7.4.3 Profile: Colour model for RDOI	44
7.5 Static object interface	44
7.5.1 Static object header	58
7.5.2 Static object entity	59
7.5.3 Profile: Colour model for SOI	61
<b>8 Feature level</b>	<b>61</b>
8.1 General	61
8.2 Generic sensor cluster feature interface	62
8.2.1 Generic sensor cluster feature header	62
8.2.2 Generic sensor cluster feature entity	63
8.3 Camera feature interface	64
8.3.1 Camera feature header	67
8.3.2 Camera feature entity	68
8.3.3 Profile: Colour model for CFI	70
8.4 Ultrasonic feature interface	70

8.4.1	Ultrasonic feature header.....	73
8.4.2	Ultrasonic feature entity.....	74
<b>9</b>	<b>Detection level .....</b>	<b>74</b>
9.1	General .....	74
9.2	Generic sensor detection interface .....	75
9.2.1	Generic sensor detections header.....	75
9.2.2	Generic sensor detections entity.....	76
9.3	Radar detection interface .....	76
9.3.1	Radar detections header .....	79
9.3.2	Radar detections entity .....	80
9.3.3	Profile: Radar ambiguity.....	81
9.4	Lidar detection interface .....	81
9.4.1	Lidar detection header .....	84
9.4.2	Lidar detection entity .....	85
9.5	Camera detection interface .....	85
9.5.1	Camera detection header .....	88
9.5.2	Camera detection entity .....	89
9.5.3	Profile: Colour model for CDI.....	90
9.6	Ultrasonic detection interface .....	90
9.6.1	Ultrasonic detection header .....	93
9.6.2	Ultrasonic detection entity .....	94
9.6.3	Profile: Ultrasonic sensor cluster .....	95
<b>10</b>	<b>Supportive sensor interfaces .....</b>	<b>96</b>
10.1	General .....	96
10.2	Generic supportive sensor interface .....	97
10.2.1	Generic supportive sensor header .....	97
10.2.2	Generic supportive sensor entity .....	98
10.3	Sensor performance interface .....	98
10.3.1	Sensor performance header .....	102
10.3.2	Sensor performance entity .....	104
10.3.3	Profile: Uniqueness of interface versioning of SPIs .....	104
10.4	Sensor health information interface .....	104
10.4.1	Sensor health information header .....	107
10.4.2	Sensor health information entity .....	108
<b>Annex A</b> (normative) <b>Interface signals .....</b>	<b>109</b>	
<b>Annex B</b> (normative) <b>Options and constraints .....</b>	<b>217</b>	
<b>Bibliography .....</b>	<b>227</b>	

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 31, *Data communication*.


Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

<https://standards.iteh.ai/catalog/standards/iso/318b7f5d-0813-48d4-8f06-d657645f56a9/iso-23150-2021>

## Introduction

Highly-automated driving (AD) functions for road vehicles require a situation awareness of the surroundings of the vehicle and a, preferably, comprehensive scene understanding. For the fast and reliable recognition of real-world objects, a sensor suite is necessary to provide information for the fusion unit. Utilisation of different sensor technologies like radar, lidar, camera and ultrasonic with different detection capabilities is indispensable to ensure both complementary and redundant information. The fusion unit analyses and evaluates the different sensor signals and finally generates a dynamic surround model with sufficient scene understanding.

While current partly-automated functions utilise only particular objects (for example, vehicles, pedestrians, road markings) to generate a simple surround model, it is necessary for future highly-automated driving functions to merge not only the recognised objects but also to include other sensor-specific properties and characteristics of these objects for the generation of a coherent model of the surroundings. To minimise the development efforts for the sensors and the fusion unit and to maximise the reusability of development and validation efforts for the different functions on the sensor and fusion unit side, a standardised logical interface layer between the sensor suite and the fusion unit is worthwhile and beneficial for both the sensor and the system supplier.

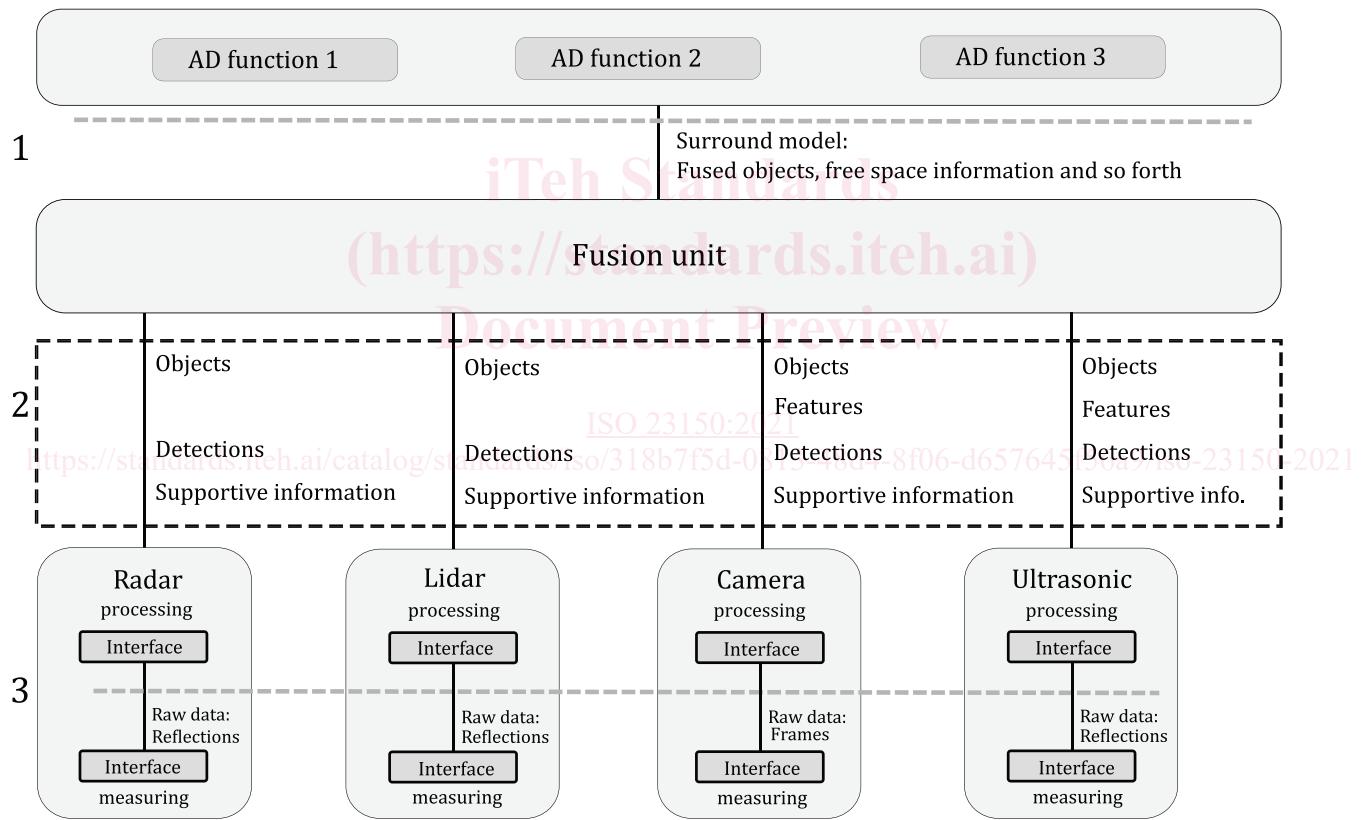

### Key

- 1 logical interface layer between the fusion unit and automated driving functions
- 2 logical interface layer between a single sensor as well as a single sensor cluster and the fusion unit
- 3 interface layer on raw data level of a sensor's sensing element

**Figure 1 — Architecture: sensors/sensor clusters – fusion unit – automated driving functions**

The logical interface layer between a single sensor as well as a single sensor cluster and the fusion unit [see key 2 in [Figure 1](#)] addresses the encapsulation of technical complexity as well as objects, features and detections to enable object-level, feature-level and detection-level fusion. Additional supportive information of the sensor as well as the sensor cluster will supplement the data for the fusion unit.

# Road vehicles — Data communication between sensors and data fusion unit for automated driving functions — Logical interface

## 1 Scope

This document is applicable to road vehicles with automated driving functions. The document specifies the logical interface between in-vehicle environmental perception sensors (for example, radar, lidar, camera, ultrasonic) and the fusion unit which generates a surround model and interprets the scene around the vehicle based on the sensor data. The interface is described in a modular and semantic representation and provides information on object level (for example, potentially moving objects, road objects, static objects) as well as information on feature and detection levels based on sensor technology specific information. Further supportive information is available.

This document does not provide electrical and mechanical interface specifications. Raw data interfaces are also excluded.

## 2 Normative references

There are no normative references in this document.

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at <https://www.iso.org/obp/7645f56a9/iso-23150-2021>

— IEC Electropedia: available at <http://www.electropedia.org/>

### 3.1 Architectural components

#### 3.1.1

##### **fusion**

act of uniting *signals* (3.3.1) from two or more *sensors* (3.1.5) as well as *sensor clusters* (3.1.6) to create a *surround model* (3.1.7)

#### 3.1.2

##### **fusion unit**

computing unit where the *fusion* (3.1.1) of *sensor* (3.1.5) data as well as a *sensor cluster* (3.1.6) data is performed

#### 3.1.3

##### **interface**

shared boundary between two functional units, defined by various characteristics pertaining to the functions, physical interconnections, *signal* (3.3.1) exchanges and other characteristics of the units, as appropriate

[SOURCE: ISO/IEC 2382:2015, 2124351, modified — Notes to entry have been removed.]

### 3.1.4

#### **logical interface**

*interface (3.1.3)* between a *sensor (3.1.5)* as well as a *sensor cluster (3.1.6)* and the *fusion unit (3.1.2)*, defined by logical characteristics

Note 1 to entry: Logical means a semantic description of the interface.

Note 2 to entry: Mechanical and electrical interfaces are excluded.

Note 3 to entry: This document uses the term interface as a shortcut for the term logical interfaces.

### 3.1.5

#### **sensor**

in-vehicle unit which detects entities external of the vehicle with preprocessing capabilities serving at least one *logical interface (3.1.4)*

Note 1 to entry: A sensor may use one or more sensing elements.

### 3.1.6

#### **sensor cluster**

group of *sensors (3.1.5)* of the same technology serving a common *logical interface (3.1.4)*

Note 1 to entry: A sensor cluster can exceptionally consist of only one sensor.

EXAMPLE A stereo camera, a surround-view camera, an ultrasonic sensor array, a corner radar system.

### 3.1.7

#### **surround model**

representation of the real world adjacent to the ego-vehicle

## 3.2 Level of detail terms

### 3.2.1

#### **detection**

sensor technology specific entity represented in the *sensor coordinate system (3.7.18)* based on a single *measurement (3.4.1)* of a *sensor (3.1.5)*

Note 1 to entry: A small amount of history can be used for some detection *signals (3.3.1)*, for example, model-free filtering may be used in track-before-detect algorithms.

### 3.2.2

#### **detection level**

set of *logical interfaces (3.1.4)* that provides *detections (3.2.1)*

### 3.2.3

#### **feature**

sensor technology specific entity represented in the *vehicle coordinate system (3.7.16)* based on multiple *measurements (3.4.1)*

Note 1 to entry: Multiple measurements can originate from a *sensor cluster (3.1.6)*.

Note 2 to entry: Multiple measurements can originate from multiple *measurement cycles (3.4.2)*.

Note 3 to entry: The term feature is used in this document not as function or group of functions as specified in ISO/SAE PAS 22736<sup>1)</sup>.

### 3.2.4

#### **feature level**

set of *logical interfaces (3.1.4)* that provides *features (3.2.3)*

1) Under preparation. Stage at the time of publication: ISO/SAE DPAS 22736:2021.

**3.2.5****object**

representation of a real-world entity with defined boundaries and characteristics in the *vehicle coordinate system* (3.7.16)

Note 1 to entry: The geometric description of the object is in the vehicle coordinate system.

Note 2 to entry: Object *signals* (3.3.1) are basically sensor technology independent. Sensor technology specific signals may extend the object signals.

EXAMPLE     A *potentially moving object* (3.6.1), a *road object* (3.6.2), a *static object* (3.6.3).

**3.2.6****object level**

set of *logical interfaces* (3.1.4) that provides *objects* (3.2.5)

### 3.3 Structure terms

**3.3.1****signal**

entity consisting of one or more values and which is part of a *logical interface* (3.1.4)

**3.3.2****logical signal group**

grouping of *signals* (3.3.1) that has a logical relationship and a name for the grouping

**3.3.3****classification**

attribute-based differentiation

Note 1 to entry: An attribute is defined by a list of enumerators.

### 3.4 Measurement terms

[ISO 23150:2021](#)

**3.4.1**  
**measurement**

measuring and processing result of a *measurement cycle* (3.4.2)

**3.4.2****measurement cycle**

time period from the start of a data acquisition event to the start of the next data acquisition event

Note 1 to entry: A measurement cycle of one *sensor* (3.1.5) is a consistent view of an observed scene and not overlapping in time.

**3.4.3****accuracy**

closeness of agreement between a measured quantity value and a true quantity value

Note 1 to entry: The concept accuracy is not a quantity and is not given a numerical quantity value. A *measurement* (3.4.1) is said to be more accurate when it offers a smaller *error* (3.4.6).

Note 2 to entry: The term accuracy should not be used for *trueness* (3.4.4) and the term *precision* (3.4.5) should not be used for accuracy, which, however, is related to both these concepts.

Note 3 to entry: Accuracy is sometimes understood as closeness of agreement between measured quantity values that are being attributed to the measurand.

[SOURCE: ISO/IEC Guide 99:2007, 2.13, modified — The terms "measurement accuracy" and "accuracy of measurement" were deleted and the Notes to entry have been adapted.]

### 3.4.4

#### trueness

closeness of agreement between the average of an infinite number of replicated measured quantity values and a reference quantity value

Note 1 to entry: Trueness is not a quantity and thus cannot be expressed numerically, but measures for closeness of agreement are given in the ISO 5725 series.

Note 2 to entry: Trueness is inversely related to systematic error, but is not related to random error.

Note 3 to entry: The term *accuracy* (3.4.3) should not be used for trueness.

[SOURCE: ISO/IEC Guide 99:2007, 2.14, modified — The terms "measurement trueness" and "trueness of measurement" were deleted and the Notes to entry have been adapted.]

### 3.4.5

#### precision

closeness of agreement between indications or measured quantity values obtained by replicate measurements (3.4.1) on the same or similar measurands under specified conditions

Note 1 to entry: Precision is usually expressed numerically by measures of imprecision, such as standard deviation, variance, or coefficient of variation under the specified conditions of measurement.

Note 2 to entry: The specified conditions can be, for example, repeatability conditions of measurement, intermediate precision conditions of measurement, or reproducibility conditions of measurement (see ISO 5725-1:1994).

Note 3 to entry: Precision is used to define measurement repeatability, intermediate measurement precision and measurement reproducibility.

Note 4 to entry: Sometimes precision is erroneously used to mean *accuracy* (3.4.3).

Note 5 to entry: Precision is inversely related to random error, but is not related to systematic error.

[SOURCE: ISO/IEC Guide 99:2007, 2.15, modified — The term "measurement precision" was deleted, the word "objects" was replaced by "measurands", the Notes to entry have been adapted and Note 5 to entry has been added.]

### 3.4.6

#### error

measured quantity value minus a reference quantity value

Note 1 to entry: The concept of error can be used both:

Note 2 to entry: a) when there is a single reference quantity value to refer to, which occurs if a calibration is made by means of a measurement standard with a measured quantity value having a negligible measurement uncertainty or if a conventional quantity value is given, in which case the error is known, and

Note 3 to entry: b) if a measurand is supposed to be represented by a unique true quantity value or a set of true quantity values of negligible range, in which case the error is not known.

Note 4 to entry: Error should not be confused with production error or mistake.

[SOURCE: ISO/IEC Guide 99:2007, 2.16, modified — The terms "measurement error" and "error of measurement" were deleted and the Notes to entry have been adapted.]

## 3.5 Requirement level terms

### 3.5.1

#### conditional

required under certain specified conditions

Note 1 to entry: One of three obligation statuses applied to a *requirement level* (3.5.4) of a *logical interface* (3.1.4) specification, indicating the conditions under which the *signal* (3.3.1) or *logical signal group* (3.3.2) is required. In other cases, the signal or logical signal group is optional. See also *mandatory* (3.5.2) and *optional* (3.5.3).

[SOURCE: ISO/IEC 11179-3:2013, 3.2.22, modified — Notes to entry have been adapted.]

### 3.5.2

#### mandatory

always required

Note 1 to entry: One of three obligation statuses applied to a *requirement level* (3.5.4) of a *logical interface* (3.1.4) specification, indicating the conditions under which the *signal* (3.3.1) or *logical signal group* (3.3.2) is required. See also *conditional* (3.5.1) and *optional* (3.5.3).

[SOURCE: ISO/IEC 11179-3:2013, 3.2.71, modified — Notes to entry have been adapted.]

### 3.5.3

#### optional

permitted but not required

Note 1 to entry: One of three obligation statuses applied to a *requirement level* (3.5.4) of a *logical interface* (3.1.4) specification, indicating the conditions under which the *signal* (3.3.1) or *logical signal group* (3.3.2) is required. See also *conditional* (3.5.1) and *mandatory* (3.5.2).

[SOURCE: ISO/IEC 11179-3:2013, 3.2.89, modified — Notes to entry have been adapted.]

### 3.5.4

#### requirement level

definition of the obligation status of a *logical interface's* (3.1.4) *logical signal group* (3.3.2), *signal* (3.3.1) as well as a signal's identifier or signal's enumerator

<https://standards.iteh.ai/catalog/standards/iso/31807/15d-0813-48d4-8f06-d657645f56a9/iso-23150-2021>

Note 1 to entry: Each requirement level entry has one of three possible obligation statuses applied: *conditional* (3.5.1), *mandatory* (3.5.2) or *optional* (3.5.3).

## 3.6 Road user relevant entity types

### 3.6.1

#### potentially moving object

real-world entity which potentially can move and is relevant for driving situations

Note 1 to entry: A representation of a potentially moving object is part of *object level* (3.2.6) *logical interfaces* (3.1.4).

EXAMPLE A vehicle, a bicycle, a pedestrian, an obstacle.

### 3.6.2

#### road object

marking or structure of a road which is relevant for driving situations

Note 1 to entry: A representation of a road object is part of *object level* (3.2.6) *logical interfaces* (3.1.4).

EXAMPLE A *road marking* (3.6.2.1), a *road boundary* (3.6.2.2), the *road surface* (3.6.2.3).

### 3.6.2.1

#### **road marking**

line, symbol or other mark on the surface of a road or a structure intended to limit, regulate, warn, guide or inform road users

Note 1 to entry: Other marks could be text, numbers, arrows or combinations.

EXAMPLE A lane marking, Botts' dots.

[SOURCE: ISO 6707-1:2020, 3.3.5.80, modified — "user" was modified to "road users", "a road surface" was modified to "the surface of a road" and the Note 1 to entry and example have been added.]

### 3.6.2.2

#### **road boundary**

structure that limits the road

EXAMPLE A curb stone, a guard rail, the end of the surface of the road.

### 3.6.2.3

#### **road surface**

surface supporting the tyre and providing friction necessary to generate shear forces in the *road plane* ([3.7.6](#))

Note 1 to entry: The surface may be flat, curved, undulated or of other shape.

[SOURCE: ISO 8855:2011, 2.6]

### 3.6.3

#### **static object**

real-world stationary entity which can be used for information and/or localisation

Note 1 to entry: A representation of a static object is part of *object level* ([3.2.6](#)) *logical interfaces* ([3.1.4](#)).

EXAMPLE A *general landmark* ([3.6.3.1](#)), a *traffic sign* ([3.6.3.2](#)), a *traffic light* ([3.6.3.3](#)).

### 3.6.3.1

#### **general landmark**

real-world stationary entity which can be used for localisation

Note 1 to entry: A stationary *traffic sign* ([3.6.3.2](#)) or *traffic light* ([3.6.3.3](#)) is also regarded as a general landmark.

EXAMPLE A building, a tunnel, a bridge, a sign gantry structure, a tree.

### 3.6.3.2

#### **traffic sign**

traffic relevant, authorised sign that limits, regulates, warns, guides or informs road users

Note 1 to entry: One traffic sign usually consists of one *main sign* ([3.6.3.2.1](#)) and none, one or several *supplementary signs* ([3.6.3.2.2](#)).

EXAMPLE A speed limit which is restricted for trucks.

### 3.6.3.2.1

#### **main sign**

*traffic sign* ([3.6.3.2](#)) which gives a general message, obtained by a combination of colour and geometric shape and which, by the addition of a graphical symbol or text, gives a particular message for road users

[SOURCE: ISO 3864-1:2011, 3.12, modified — The original term was "safety sign", "sign" has been replaced by "traffic sign" and the phrases "or text" and "for road users" have been added to the definition.]

**3.6.3.2.2****supplementary sign**

*traffic sign* (3.6.3.2) that is supportive of a *main sign* (3.6.3.2.1) and the main purpose of which is to provide additional clarification

[SOURCE: ISO 3864-1:2011, 3.14, modified — "traffic sign" now replaces "sign" and "main sign" replaces "traffic sign".]

**3.6.3.3****traffic light**

traffic relevant, official lights

Note 1 to entry: One traffic light consists of one or several light spots with different light colours and shapes.

EXAMPLE A pedestrian traffic light.

## 3.7 Axis and coordinate system terms

**3.7.1****reference frame**

geometric environment in which all points remain fixed with respect to each other at all times

[SOURCE: ISO 8855:2011, 2.1]

**3.7.2****axis system**

set of three orthogonal directions associated with  $X$ ,  $Y$  and  $Z$  axes

Note 1 to entry: A right-handed axis system is assumed throughout this document, where:  $\vec{Z} = \vec{X} \times \vec{Y}$ .

[SOURCE: ISO 8855:2011, 2.3, modified — Notes to entry have been adapted.]

**3.7.3****coordinate system**

numbering convention used to assign a unique ordered trio of values to each point in a *reference frame* (3.7.1) and which consists of an *axis system* (3.7.2) plus an origin point

[SOURCE: ISO 8855:2011, 2.4, modified — " $(x, y, z)$ " has been removed from the definition.]

**3.7.4****cartesian coordinate system**

set of numerical coordinates  $(x, y, z)$ , which are the signed distances to the  $YZ$ -,  $ZX$ - and  $XY$ -planes

**3.7.5****spherical coordinate system**

set of two angles and a distance vector associated with radial distance, azimuth and elevation

Note 1 to entry: The azimuth angle is the angle in  $XY$ -plane of the *axis system* (3.7.2) counted from the  $X$ -axis. The elevation angle is the angle from the azimuth direction in the  $XY$ -plane of the axis system towards the direction of the distance vector, that is  $XY$ -plane has an elevation angle = 0 rad.


Note 2 to entry: The angles of the spherical coordinate system have increasing values in counter-clockwise direction.

**3.7.6****road plane**

plane representing the *road surface* (3.6.2.3) within the front tyre contact patches and the *vehicle road-level reference point* (3.7.13)

Note 1 to entry: See [Figure 2](#).

Note 2 to entry: For tyre contact patches, see ISO 8855:2011, 4.1.5.

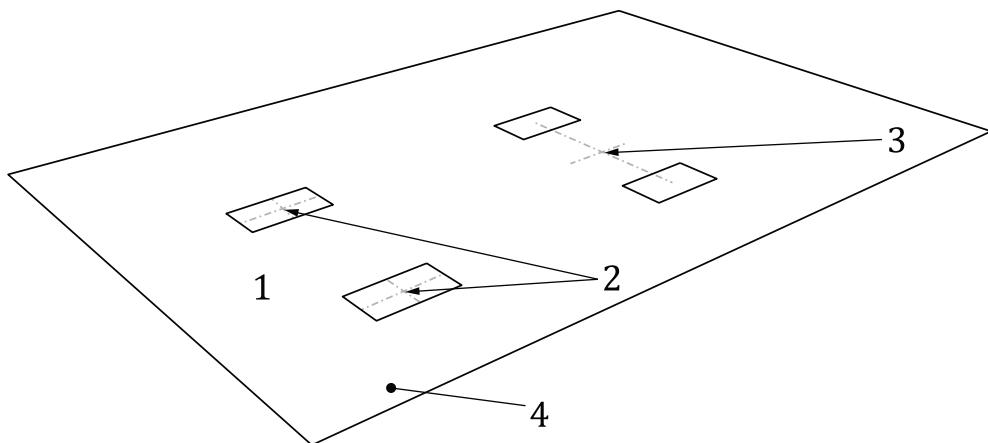**Key**

- 1 vehicle front
- 2 vehicle's front tyre contact patches
- 3 *vehicle road-level reference point* (3.7.13)
- 4 *vehicle road plane* (3.7.6)

**Figure 2 — Road plane**

[SOURCE: ISO 8855:2011, 2.7, modified — The phrase "and the vehicle road-level reference point" and the figure have been added, and the Notes to entry have been modified.]

**3.7.7****road level**

point related to a *road plane* (3.7.6)

**3.7.8****vehicle unsprung mass**

[ISO 23150:2021](#)

unsprung mass <https://standards.iteh.ai/catalog/standards/iso/318b7f5d-0813-48d4-8f06-d657645f56a9/iso-23150-2021>  
mass that is not carried by the suspension, but is supported directly by the tyres

[SOURCE: ISO 8855:2011, 4.11, modified — The term "vehicle unsprung mass" has been added.]

**3.7.9****vehicle sprung mass**

sprung mass

mass that is supported by the suspension, that is the total vehicle mass less the *vehicle unsprung mass* (3.7.8)

[SOURCE: ISO 8855:2011, 4.12, modified — The term vehicle sprung mass has been added and Note 1 to entry has been removed.]

**3.7.10****vehicle rear-axle reference point**

point fixed in the *vehicle sprung mass* (3.7.9) and located at the centre of the rear-axle

**3.7.11****vehicle sprung mass axis system**

*axis system* (3.7.2) fixed in the *reference frame* (3.7.1) of the *vehicle sprung mass* (3.7.9), so that the X-axis is substantially horizontal and forwards (with the vehicle at rest), and is parallel to the vehicle's longitudinal plane of symmetry, and the Y-axis is perpendicular to the vehicle's longitudinal plane of symmetry and points to the left with the Z-axis pointing upward