



Designation: ~~D6256/D6256M-99 (Reapproved 2005)~~ Designation: D6256/D6256M – 10

## Standard Specification for Wood-Cleated Shipping Boxes with Skidded, Load-Bearing Bases<sup>1</sup>

This standard is issued under the fixed designation D6256/D6256M; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

### 1. Scope

1.1 This specification covers the fabrication of new wood-cleated boxes with skidded, load-bearing bases. Boxes covered by this specification are designed for nonregulated domestic and overseas shipment of loads less than 2500 lb [1134 kg] and not greater than 16 ft [4877 mm] in length (see 9.1). Regulated commodities shipments may require better boxes than those specified herein (see 9.2).

1.2 The performance of wood-cleated boxes with skidded, load-bearing bases is dependent on their fabricated components; therefore, a variety of types, styles, and classes reflecting varied performance are specified. This specification, however, does not cover box performance under all atmosphere, handling, shipping and storage conditions.

1.3 If the use of other construction methods or techniques are acceptable and permitted (see 5.1.18), the resulting packaging systems shall be of equal or better performance than would result from the use of these specified materials and procedures. The appropriate distribution cycle specified in Practice D4169 can be used to develop comparative procedures and criteria.

1.4 The values stated in either inch-pound units or SI units are to be regarded separately as standard. Within the text, the SI units are shown in brackets. The values stated in each system are not exact equivalents; therefore, each system must be used independently of the other. Combining values from the two systems may result in nonconformance with the standard. See IEEE/ASTM SI 10 for conversion of units.

1.5 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of the standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

### 2. Referenced Documents

#### 2.1 ASTM Standards:<sup>2</sup>

D996 Terminology of Packaging and Distribution Environments ~~D1990 Practice for Establishing Allowable Properties for Visually-Graded Dimension Lumber from In-Grade Tests of Full-Size Specimens~~

D3951 Practice for Commercial Packaging

D3953 Specification for Strapping, Flat Steel and Seals

D4169 Practice for Performance Testing of Shipping Containers and Systems

D4675 Guide for Selection and Use of Flat Strapping Materials

D4727/D4727M Specification for Corrugated and Solid Fiberboard Sheet Stock (Container Grade) and Cut Shapes

~~D6251/D6251M Specification for Wood-Cleated Panelboard Shipping Boxes~~

D6039/D6039M Specification for Open and Covered Wood Crates

D6199 Practice for Quality of Wood Members of Containers and Pallets

D6251/D6251M Specification for Wood-Cleated Panelboard Shipping Boxes

D6253 Practice for Treatment and/or Marking of Wood Packaging Materials

F1667 Specification for Driven Fasteners: Nails, Spikes, and Staples

IEEE/ASTM SI 10 Standard for Use of the International System of Units (SI): The Modern Metric System

2.2 Federal Specifications: American Wood Protection Association (AWPA) Standard:<sup>3</sup> ~~FF-W-572 Wood Preservative: Water-Repellent~~

<sup>1</sup> This specification is under the jurisdiction of ASTM Committee D10 on Packaging and is the direct responsibility of Subcommittee D10.12 on Shipping Containers, Crates, Pallets, Skids and Related Structures.

Current edition approved April 1, 2005-2010. Published April 2005-October 2010. Originally approved in 1998. Last previous edition approved in 1999-2005 as D6256/D6256M – 99(2005). DOI: 10.1520/D6256-D6256M-99R05.10.1520/D6256\_D6256M-10.

<sup>2</sup> For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For Annual Book of ASTM Standards volume information, refer to the standard's Document Summary page on the ASTM website.

<sup>3</sup> Available from the Federal Supply Service Bureau, Specification Section, Suite 8100, 480 L'Enfant Plaza, SW, Washington, DC 20408.

PPP-B-601 Boxes, Wood, Cleated-Plywood

P36 Standard for Copper Naphthenate (CuN)

P37 Standard for Oxine Copper (Copper 8-Quinolinolate) (Cu8)

2.3 *Code of Federal Regulations*:<sup>4</sup>

CFR Parts 107–180 Title 49, Hazardous Materials Regulations

**iTeh Standards**  
**(<https://standards.itih.ai>)**  
**Document Preview**

[ASTM D6256/D6256M-10](#)

<https://standards.itih.ai/catalog/standards/sist/3dbe932f-9190-4646-b306-38839c1d9ddd/astm-d6256-d6256m-10>

---

<sup>3</sup> Available from American Wood Protection Association (AWPA), P.O. Box 361784, Birmingham, AL 35236-1784, <http://www.awpa.com>.

<sup>4</sup> Available from U.S. Government Printing Office Superintendent of Documents, 732 N. Capitol St., NW, Mail Stop: SDE, Washington, DC 20401.

2.4 ~~APA—The Engineered Wood Association Standard—National Institute of Standards and Technology (NIST) Standards: PS1-95 Construction and Industrial Plywood PS1 Voluntary Product Standard, Structural Plywood<sup>5</sup> PS2 Performance Standard for Wood-Based Structural-Use Panels<sup>6</sup> PS20 American Softwood Lumber Standard<sup>6</sup>~~

2.5 ~~American Society of Mechanical Engineers (ASME) Standards:<sup>7</sup>~~

B18.2.1 Square and Hex Bolts and Screws—Inch Series

B18.2.2 Square and Hex Nuts (Inch Series)

B18.2.3.8M Metric Hex Lag Screws

B18.2.4.2M Metric Hex Nuts, Style 2

B18.5 Round Head Bolts (Inch Series)

B18.5.2.2M Metric Round Head Square Neck Bolts

B18.22M Metric Plain Washers

B18.22.1 Plain Washers

2.6 ~~Hardwood Plywood and Veneer Association (HPVA) Standard:<sup>8</sup>~~

~~HPVA HP-1-1994 Hardwood and Decorative Plywood—ANSI/HPVA HP-1-2004 American National Standard for Hardwood and Decorative Plywood~~

2.7 ~~National Motor Freight Traffic Association (NMFTA) Standard:<sup>9</sup>~~

~~National Motor Freight Classification~~

2.8 ~~Uniform Classification Committee Standard—National Hardwood Lumber Association (NHLA) Standard:<sup>10</sup>~~

~~Uniform Freight Classification—NHLA Rules for the Measurement and Inspection of Hardwood and Cypress~~

2.9 ~~International Standard:<sup>11</sup>~~

~~ISPM Publication No. 15 Regulation of Wood Packaging Material in International Trade~~

2.10 ~~Federal Standard:<sup>12</sup>~~

~~MIL-DTL-2427H Detail Specification Box, Ammunition Packing: Wood, Nailed~~

### 3. Terminology

3.1 *Definitions*—General definitions for packaging and distribution environments are found in Terminology D996.

### 4. Classification

4.1 *Type*:

4.1.1 *Type I*—Plywood base (see Fig. 1).

4.1.2 *Type II*—Lumber base (see Fig. 1).

4.2 *Class*:

4.2.1 *Class 1*—Domestic.

4.2.2 *Class 2*—Overseas. <http://log/standards/sist/3d9e932f9190-4646-b306-38839c1d9ddd/astm-d6256-d6256m-10>

4.3 *Style*:

4.3.1 *Style A*—Regular cleating arrangement (see Fig. 2).

4.3.2 *Style B*—Lock corner cleating arrangement (see Fig. 2).

4.4 *Treatment*:

4.4.1 *Treatment A*—Without preservative treatment.

4.4.2 *Treatment B*—With preservative treatment.

<sup>6</sup> Available from APA—The Engineered Wood Association, 7011 S. 19th St., P.O. Box 11700, Tacoma, WA 98411-0700.

<sup>5</sup> Available from The Engineered Wood Association (APA), 7011 S. 19th St., Tacoma, WA 98466-5333, <http://www.apawood.org>.

<sup>6</sup> Available from American Society of Mechanical Engineers (ASME), ASME International Headquarters, Three Park Ave., New York, NY 10016-5990, American National Standard Institute (ANSI) adopted.

<sup>6</sup> Available from American Lumber Standards Committee, Inc. (ALSC), P.O. Box 210, Germantown, MD 20875-0210, <http://www.alsc.org>.

<sup>7</sup> Available from Hardwood Plywood and Veneer Association, P.O. Box 2789, Reston, VA 22090-0789, American National Standards Institute (ANSI) adopted.

<sup>7</sup> Available from American Society of Mechanical Engineers (ASME), ASME International Headquarters, Three Park Ave., New York, NY 10016-5990, American National Standard Institute (ANSI) adopted.

<sup>8</sup> Available from National Motor Freight Traffic Association, 2200 Mill Rd., Alexandria, VA 22302.

<sup>8</sup> Available from Hardwood Plywood and Veneer Association (HPVA), P.O. Box 2789, Reston, VA 22090-0789, <http://www.hpva.org>, American National Standards Institute (ANSI) adopted.

<sup>9</sup> Available from the Uniform Classification Committee, Tariff Publishing Officer, 151 Ellis St. N.E., Suite 200, Atlanta, GA 30335.

<sup>9</sup> Available from National Motor Freight Traffic Association (NMFTA), 1001 N. Fairfax St., Alexandria, VA 22314, <http://www.nmfta.org>.

<sup>10</sup> Available from the Uniform Classification Committee, Tariff Publishing Officer, 151 Ellis St. N.E., Suite 200, Atlanta, GA 30335.

<sup>11</sup> This specification is under the jurisdiction of ASTM Committee D10 on Packaging and is the direct responsibility of Subcommittee D10.12 on Shipping Containers, Crates, Pallets, Skids and Related Structures.

Current edition approved Oct. 1, 2010. Published October 2010. Originally approved in 1998. Last previous edition approved in 2005 as D6256/D6256M – 99(2005). DOI: 10.1520/D6256\_D6256M-10.

<sup>12</sup> Available from U.S. Government Printing Office Superintendent of Documents, 732 N. Capitol St., NW, Mail Stop: SDE, Washington, DC 20401, <http://www.access.gpo.gov>.

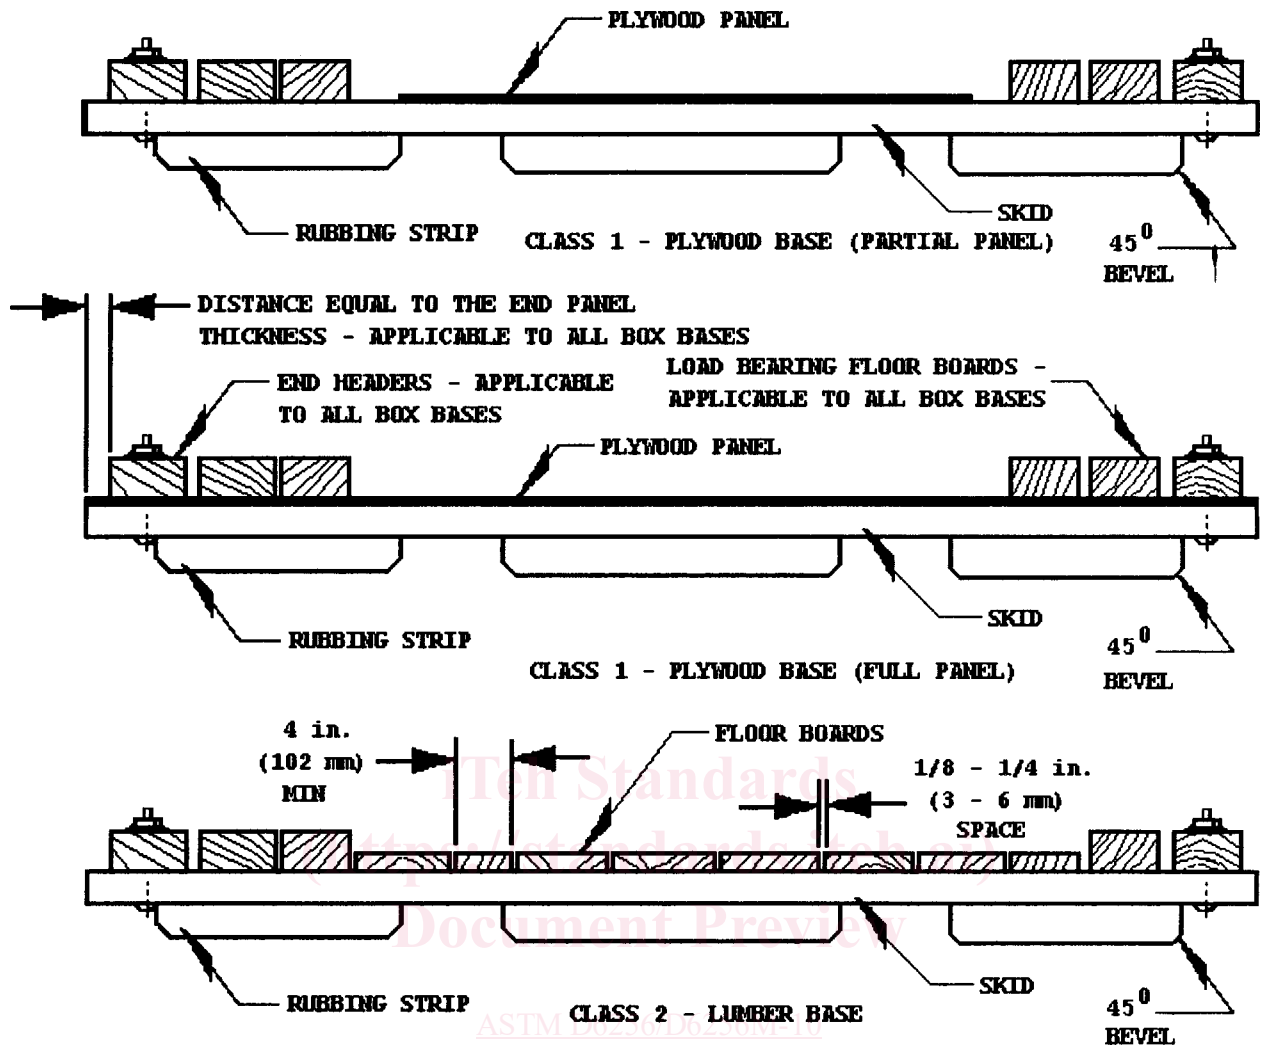


FIG. 1 Base Types

## 5. Ordering Information

5.1 Purchasers should select the preferred permitted options and include the following information in procurement documents:

- 5.1.1 Specification title, number, and date.
- 5.1.2 Box type, style, and class required (see Section 4).
- 5.1.3 Type of base flooring (see Section 4.1).
- 5.1.4 When plywood is sanded or treated (see 4.4 and 6.1.2).
- 5.1.5 If beveling of skids is required (see 6.2).
- 5.1.6 Contents weight (see Table 1).
- 5.1.7 If rubbing strips are required (see 6.2.4).
- 5.1.8 Type of superstructure (see 6.2.5).
- 5.1.9 Joist requirement (see 6.2.5.2).
- 5.1.10 Box inside dimensions specified in inches [millimeters] to the nearest 1/2 in. [13 mm] in order of length by width by height (see 7.1).
- 5.1.11 Whether boxes are to be shipped assembled or knocked-down (see 7.4.2 and 8.1).
- 5.1.12 When corner straps are required (see 7.4.2.4).
- 5.1.13 Whether ventilation holes or slots are required (see 7.5).
- 5.1.14 Whether special packing is required (see 8.3).
- 5.1.15 Whether special marking is required (see 8.3).
- 5.1.16 Load condition (see Figs. 3 and 4).
- 5.1.17 Whether a regulated materials box is required (see 9.2).

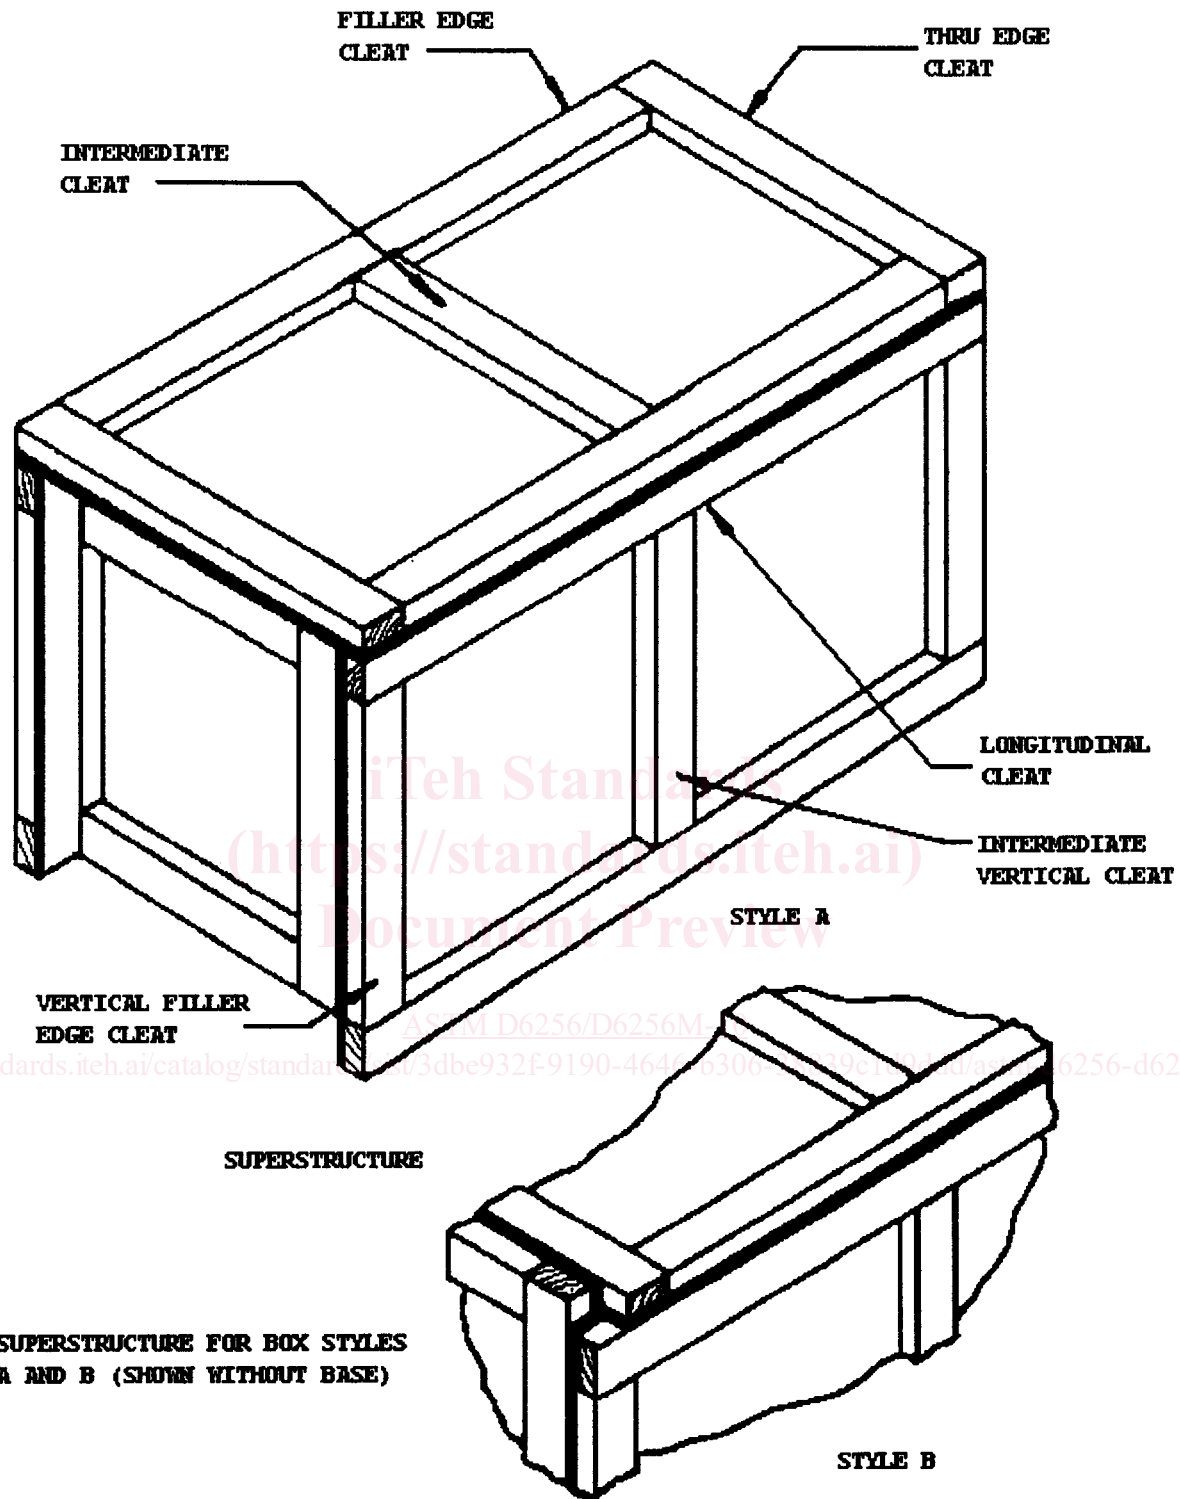


FIG. 2 Box Styles

5.1.17.1 Physical characteristics of load, including contents dimensions, weight, and density.

5.1.17.2 Whether a test report is required.

5.1.18 Whether other construction methods or techniques are acceptable and permitted (see 1.3).

5.1.18.1 Whether proof that other construction methods or techniques are acceptable (see 1.3) is required.

5.1.19 When ISPM Publication No. 15 compliance is required (see 7.8).

## 6. Materials and Manufacture

6.1 *Materials*—It is encouraged that recycled material be used when practical. All recovered, recycled, or virgin materials used



# D6256/D6256M – 10

### TABLE 1 Skid Nominal Sizes<sup>A</sup> and Maximum Lengths

Contents Weight lb [kg]	Load <sup>B</sup> Condition	Nominal Sizes <sup>A</sup> in. [mm]					
		2 by 4 [38 by 89]	2 by 6 [38 by 140]	2 by 8 [38 by 184]	4 by 4 [89 by 89]	4 by 6 [89 by 140]	6 by 6 [140 by 140]
		Skid Max Length ft [mm]					
0–100 [0–45]	A	16 [4877]	...	...	...	...	...
	B	16 [4877]	...	...	...	...	...
	C	16 [4877]	...	...	...	...	...
	D	16 [4877]	...	...	...	...	...
	E	16 [4877]	...	...	...	...	...
101–200 [45.8–90.7]	A	16 [4877]	...	...	...	...	...
	B	16 [4877]	...	...	...	...	...
	C	16 [4877]	...	...	...	...	...
	D	16 [4877]	...	...	...	...	...
	E	16 [4877]	...	...	...	...	...
201–400 [91.2–181.4]	A	11 [3353]	15 [4572]	16 [4877]	...	...	...
	B	13 [3962]	16 [4877]	...	...	...	...
	C	8 [2438]	12 [3658]	16 [4877]	...	...	...
	D	10 [3048]	15 [4572]	16 [4877]	...	...	...
	E	13 [3962]	16 [4877]	...	...	...	...
401–600 [181.9–272.2]	A	8 [2438]	11 [3353]	14 [4267]	16 [4877]	...	...
	B	9 [2743]	14 [4267]	16 [4877]	...	...	...
	C	5 [1524]	8 [2438]	11 [3353]	16 [4877]	...	...
	D	7 [2134]	10 [3048]	14 [4267]	16 [4877]	...	...
	E	9 [2743]	14 [4267]	16 [4877]	...	...	...
601–800 [272.6–363]	A	7 [2134]	9 [2743]	11 [3353]	16 [4877]	...	...
	B	7 [2134]	10 [3048]	14 [4267]	16 [4877]	...	...
	C	4 [1219]	6 [1829]	8 [2438]	16 [4877]	...	...
	D	5 [1524]	8 [2438]	10 [3048]	16 [4877]	...	...
	E	7 [2134]	10 [3048]	14 [4267]	16 [4877]	...	...
801–1000 [363.3–453.6]	A	6 [1829]	8 [2438]	10 [3048]	16 [4877]	...	...
	B	5 [1524]	8 [2438]	11 [3353]	16 [4877]	...	...
	C	3 [914]	5 [1524]	7 [2134]	16 [4877]	...	...
	D	4 [1219]	6 [1829]	8 [2438]	16 [4877]	...	...
	E	5 [1524]	8 [2438]	11 [3353]	16 [4877]	...	...