
**Textiles — Determination of index
ingredient from coloured textile —**

**Part 5:
Lac**

*Textiles — Détermination d'indicateurs d'ingrédients de textiles
colorés —*

iTeh STANDARD PREVIEW
Partie 5: Gomme-Laque
(standards.iteh.ai)

[ISO 22195-5:2021](https://standards.iteh.ai/catalog/standards/sist/b9ea79d3-3a98-4d9b-9e61-b4d875d8fdcc/iso-22195-5-2021)

[https://standards.iteh.ai/catalog/standards/sist/b9ea79d3-3a98-4d9b-9e61-
b4d875d8fdcc/iso-22195-5-2021](https://standards.iteh.ai/catalog/standards/sist/b9ea79d3-3a98-4d9b-9e61-b4d875d8fdcc/iso-22195-5-2021)



iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 22195-5:2021

<https://standards.iteh.ai/catalog/standards/sist/b9ea79d3-3a98-4d9b-9e61-b4d875d8fdcc/iso-22195-5-2021>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Principle.....	1
5 Reagents.....	2
6 Apparatus.....	2
7 Procedure.....	2
7.1 Standard preparation.....	2
7.2 Preparation of specimen.....	2
7.3 Analysis.....	3
7.4 Qualification of laccaic acid C.....	3
8 Test report.....	3
Annex A (informative) Example of test result.....	4

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 22195-5:2021](https://standards.iteh.ai/catalog/standards/sist/b9ea79d3-3a98-4d9b-9e61-b4d875d8fdcc/iso-22195-5-2021)

<https://standards.iteh.ai/catalog/standards/sist/b9ea79d3-3a98-4d9b-9e61-b4d875d8fdcc/iso-22195-5-2021>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 38, *Textiles*.

A list of all parts in the ISO 22195 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

There is no doubt that dyeing plays the most important role in expressing the colour of clothes. Until the invention of synthetic dyes capable of expressing diverse colours today, humankind used materials obtained from nature to dye fabric. Typically, colourants were obtained from plants or various materials were extracted from minerals or insects. Dyeing fabrics using materials derived from these natural substances made it necessary to identify which substances the colourant was derived from. In other words, there has been a demand to confirm whether a fabric has been dyed with a natural substance.

There are several natural dyes raw material which give similar colour tone, they have different colouring molecule and the precise colorant. But each has different environmental profile which decided Environment impact of dyestuff. Textile dyed with natural dyes is claimed for environmental benefit mainly. Identification of dye helps in knowing and verifying the claims, that will help environment to get benefit exactly in the way it is claimed with textile.

This leads to the development of a test method to determine the type of natural substances used.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 22195-5:2021](https://standards.iteh.ai/catalog/standards/sist/b9ea79d3-3a98-4d9b-9e61-b4d875d8fdcc/iso-22195-5-2021)

<https://standards.iteh.ai/catalog/standards/sist/b9ea79d3-3a98-4d9b-9e61-b4d875d8fdcc/iso-22195-5-2021>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 22195-5:2021

<https://standards.iteh.ai/catalog/standards/sist/b9ea79d3-3a98-4d9b-9e61-b4d875d8fdcc/iso-22195-5-2021>

Textiles — Determination of index ingredient from coloured textile —

Part 5: Lac

1 Scope

This document specifies a test method which identifies the index ingredient chemical included in coloured fabric with lac. Lac can be applied to both natural fibre and man-made fibre.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3696, *Water for analytical laboratory use — Specification and test methods*

3 Terms and definitions (standards.iteh.ai)

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

— ISO Online browsing platform: available at <https://www.iso.org/obp>

— IEC Electropedia: available at <https://www.electropedia.org/>

3.1

lac

scarlet resinous secretion of a number of species of lac insects, of which the most commonly cultivated is *Kerria lacca*

Note 1 to entry: Lac is the common name of insect *Kerria lacca*. Thousands of lac insects colonize the branches of the host trees and secrete the resinous pigment. The coated branches of the host trees are cut and harvested as stick lac. This stick contains shellac. The spend of shellac extract is used for extraction of lac colorant.

3.2

coloured

expressing of colours to textiles by dyeing, printing or coating

3.3

natural colourant

materials obtained from plants, wood, rocks, soil, insects or any other thing existing on earth without any chemical reaction adopted before colouring of textiles

4 Principle

The identification of natural colorant is very important in the scientific examination of the colouring sources of textiles, coloured print paintings, illuminated manuscripts and other works where natural colorants are used. Natural colorants are usually composed of several phyto chemicals. Each colorant

has a distinctive chemical which acts as a chromophore and imparts specific colour. Colorants from natural sources can be identified by chemical structure of chromophoric chemical. This chromophoric chemical can be extracted from the dyed textile and identified by chromatography.

NOTE On the other hand, if the index component laccaic acid is detected through this test method, it cannot be said that it is necessarily stained with lac alone. However, based on this principle, applying this test method to unknown coloured fabrics or textiles is useful to provide a minimum amount of information that can be used to confirm whether the fabric is coloured using lac dye.

5 Reagents

Unless otherwise specified, use only reagents of recognized analytical grade.

5.1 **Water**, distilled or grade 3 in accordance with ISO 3696.

5.2 **Acetonitrile**, HPLC Grade.

5.3 **Laccaic acid C**, with a mass fraction of 99 %.

5.4 **Dimethylformamide (DMF)**, analytical grade.

5.5 **Trifluoroacetic acid**, HPLC Grade.

6 Apparatus

iTeh STANDARD PREVIEW
(standards.iteh.ai)

6.1 **Analytical balance**, resolution at 0,001 g.

6.2 **Ultrasonic water bath**, to be set up at (30 ± 2) °C.
<https://standards.iteh.ai/catalog/standards/sist/b9ea79d3-3a98-4d9b-9e61-b4d875d81dce/iso-22195-5-2021>

6.3 **Silica borate glass container**, with a nominal volume of 50 ml.

6.4 **Membrane filter**, with 0,45 µm pore size.

6.5 **Pipette**, with a nominal volume of 20 ml.

6.6 **Disposable syringe**, with a nominal volume of 2 ml.

6.7 **High performance liquid chromatograph (HPLC) with photo diode array (PDA) detector**.

7 Procedure

7.1 Standard preparation

Stock solution of laccaic acid C (5.3) is prepared in acetonitrile (5.2) containing 1 000 mg/l.

7.2 Preparation of specimen

Cut the sample into pieces of approximately (5 mm × 5 mm). Prepared approximately 2 g of the cut sample, weigh (6.1) it to nearest 0,01 g, and then place it into the glass container (6.3).

Pipette (6.5) 20 ml of DMF (5.4) each into the other glass container (6.3) and it poured to cut sample containing glass container. Place the sample contained glass container into an ultrasonic bath (6.2) at (30 ± 2) °C for (20 ± 1) min. Afterwards, let the extract cool down to room temperature.

Filter about 1 ml of the extracted solution into a HPLC vial using disposable syringe (6.6) equipped with a membrane filter (6.4).

7.3 Analysis

The detection and qualification of laccaic acid C is conducted using HPLC with PDA detector (6.7). The recommendable chromatographic conditions are given in Annex A. Confirm that the retention time and the maximum absorption wavelength of the catechin standard match, or the spectrum matches.

7.4 Qualification of laccaic acid C

Comparison between analyses of standard and sample through 7.3 can show the result of existence of laccaic acid C in sample.

NOTE Detection of laccaic acid C can vary due to conditions of coloured sample. In this case, the amount of specimen and extraction solution can be modified and concentration of extracted solution can be adopted.

8 Test report

The test report shall include the following information:

- a) a reference to this document, i.e. ISO 22195-5:2021;
- b) identification of the sample;
- c) conditions of chromatographic analysis;
- d) test result;
- e) any deviation from the specified procedure in this document;
- f) the date of the test.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 22195-5:2021
<https://standards.iteh.ai/catalog/standards/sist/b9ea79d3-3a98-4d9b-9e61-b4d875d8fdcc/iso-22195-5-2021>

Annex A (informative)

Example of test result


A.1 Analysis of Lac colourant

Prepare 1 ml of Lac colorants solution with 1 mg/ml according to 7.1 by disposable syringe (6.6). The result of chromatogram is shown Figure A.1.

A.1.1 Chromatographic conditions for the HPLC-PDA

The HPLC-PDA analysis is adopted to find out the specified wavelength in 300 nm and its chromatographic conditions are as follows:

- Detection wavelength: 300 nm
- Column: (C-18) 250 mm, 4,6 mm, 5 μ m
- Mobile Phase: (a) Trifluoroacetic acid (5.5) (0,2 %) with water and (b) acetonitrile (5.2) (30:70)

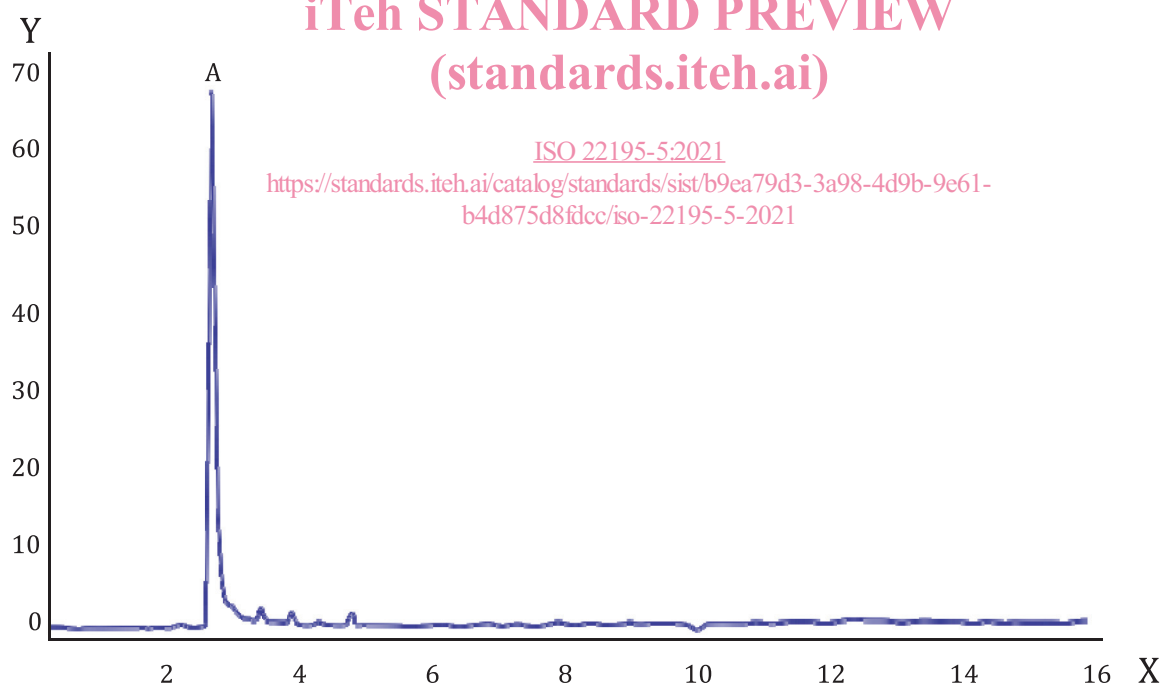

Key

- X retention time (min)
- Y absorbance (mAU)
- A peak of laccaic acid-c (at 2,828)

Figure A.1 — Chromatogram of Lac colourant by HPLC-PDA