

---

---

**Intelligent transport systems —  
Vehicle-to-vehicle intersection  
collision warning systems (VVICW) —  
Performance requirements and test  
procedures**

*Systèmes de transport intelligents — Systèmes d'alerte de collision  
aux intersections de véhicule-à-véhicule (VVICW) — Exigences de  
performance et procédures d'essai*

(<https://standards.iteh.ai>)  
Document Preview

ISO 23376:2021

<https://standards.iteh.ai/catalog/standards/iso/fa00e627-27e0-48df-9b60-7d64aa571551/iso-23376-2021>



**iTeh Standards**  
**(<https://standards.iteh.ai>)**  
**Document Preview**

ISO 23376:2021

<https://standards.iteh.ai/catalog/standards/iso/fa00e627-27e0-48df-9b60-7d64aa571551/iso-23376-2021>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

<b>Foreword</b>	<b>iv</b>
<b>Introduction</b>	<b>v</b>
<b>1 Scope</b>	<b>1</b>
<b>2 Normative references</b>	<b>1</b>
<b>3 Terms and definitions</b>	<b>1</b>
<b>4 Symbols and abbreviated terms</b>	<b>3</b>
<b>5 Requirements</b>	<b>4</b>
5.1 Minimum enable conditions	4
5.2 Minimum required VVICW scenarios	4
5.3 Necessary functions	5
5.4 State transition diagram	6
5.4.1 General	6
5.4.2 State functional description	6
<b>6 Warning provisions</b>	<b>7</b>
6.1 VVICW output	7
6.2 Warning modality	7
6.3 Warning criteria for crossing scenarios	8
6.3.1 Warning requirements	8
6.3.2 No warning provisions	10
6.4 Warning criteria for oncoming scenarios	11
6.4.1 Warning requirements	11
6.4.2 No warning requirements	11
<b>7 V2V data provisions: permissions</b>	<b>12</b>
<b>8 Testing procedures</b>	<b>12</b>
8.1 General	12
8.2 Crossing scenarios	12
8.2.1 Warning tests	12
8.2.2 No warning tests	14
8.3 Oncoming scenarios	15
8.3.1 Warning tests	15
8.3.2 No warning tests	16
<b>Bibliography</b>	<b>18</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 204, *Intelligent transport systems*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).


ISO 23376:2021

<https://standards.iteh.ai/catalog/standards/iso/fa00e627-27e0-48df-9b60-7d64aa571551/iso-23376-2021>

## Introduction

Vehicle-to-vehicle intersection collision warning systems (VVICW) warn the driver to avoid potential collisions at intersections. The VVICW warns the driver of imminent crashes with other vehicles crossing at a road junction. The system relies on relative positioning, speed and heading between vehicles determined using vehicle-to-vehicle (V2V) communication, such as dedicated short-range communication (DSRC). It is intended to be used to avoid intersection crossing crashes, the most severe crashes based on fatality counts. Due to limited field of view sensing, on-board sensor systems such as camera, lidar and radar systems cannot be used efficiently for such systems. [Figure 1](#) illustrates the functional elements of VVICW.

The VVICW is a road level system that deals with conflict scenarios between vehicles driving on two connected road segments sharing a common intersection. VVICW positioning requirements are not demanding compared to those of red light violation warning systems, for example. A comprehensive set of intersection collision scenarios can be found in Reference [1].

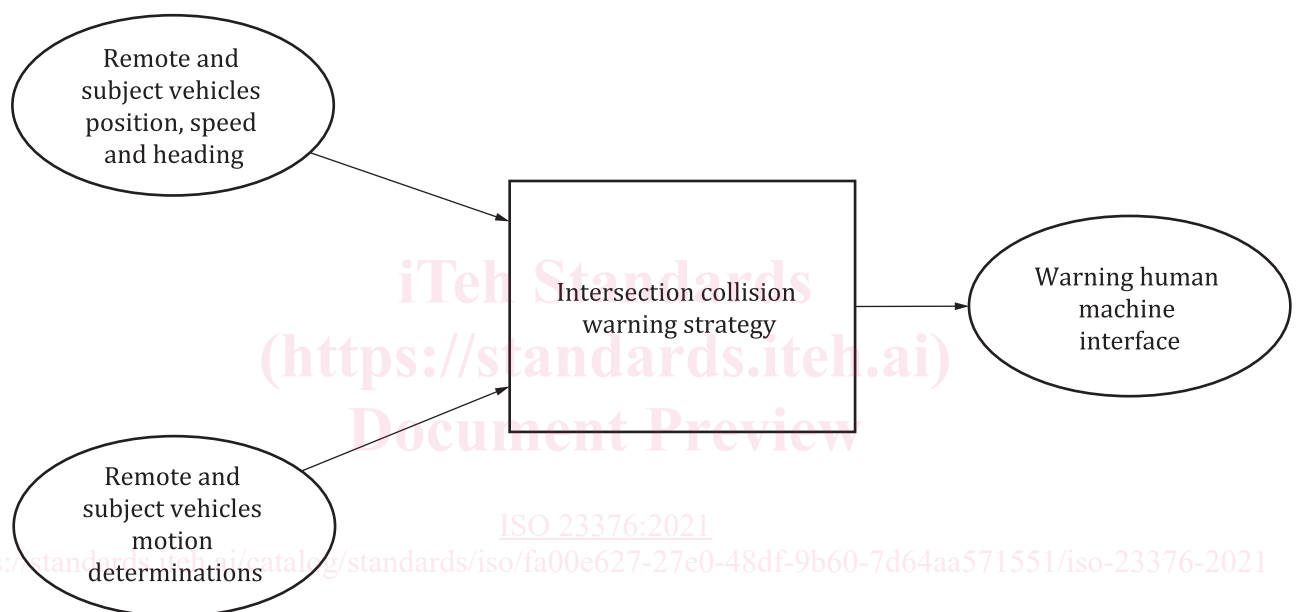

**Figure 1 — Vehicle-to-vehicle intersection collision warning systems functional elements**



# Intelligent transport systems — Vehicle-to-vehicle intersection collision warning systems (VVICW) — Performance requirements and test procedures

## 1 Scope

This document specifies performance requirements and test procedures for systems capable of warning the subject vehicle driver of a potential crossing-path collision with other vehicles at intersecting road segments.

Vehicle-to-vehicle intersection collision warning systems (VVICW) rely on vehicle-to-vehicle (V2V) communications and relative positioning between the subject vehicle and crossing-path vehicles (remote vehicles). V2V data, such as position, speed and heading are used to evaluate if an intersection collision is imminent between the subject and remote vehicles. The performance requirements laid out in this document specify the warning criteria for these systems.

In addition, VVICW operate in specified subject and remote vehicle speed ranges, road intersection geometries and target vehicle types. Moreover, the requirements for the V2V data will be specified. The scope of this document includes operations on intersecting road segments (physically intersecting roads), and motor vehicles including cars, trucks, buses and motorcycles. Responsibility for the safe operation of the vehicle remains with the driver.

## 2 Normative references

There are no normative references in this document.

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

### 3.1 subject vehicle

#### SV

motor vehicle equipped with a VVICW

Note 1 to entry: A subject vehicle can be also a remote vehicle for another subject vehicle.

### 3.2 subject vehicle speed

subject vehicle velocity in the heading direction

### 3.3 remote vehicle

#### RV

motor vehicle equipped at minimum with a V2V transmission device and localization system and that has the ability to possibly intersect the path of the subject vehicle

### 3.4

#### **remote vehicle speed**

longitudinal component of the remote vehicle velocity in the heading direction

### 3.5

#### **intersecting road segment**

physically intersecting roads that are described based on the number of road segments

Note 1 to entry: A road junction is where two or more road segments intersect.

Note 2 to entry: Roundabout, ramp/highway, street 4-way intersection and street 3-way intersection are examples of intersection road geometry.

EXAMPLE 1 A four-way intersection, or crossroads, usually involves a crossing of two streets or roads. In areas where there are rectilinear blocks and in some other cases, the crossing streets or roads are perpendicular to each other. However, two roads may cross at a different angle. In a few cases, the junction of two road segments can be offset from each other when reaching an intersection, even though both ends may be considered the same street.

EXAMPLE 2 A three-way intersection is a junction between three road segments, a T junction where two arms form one road, or a Y junction. The latter also known as a fork if approached from the stem of the Y.

### 3.6

#### **time to collision**

##### **TTC**

time that it takes a subject vehicle to collide with a remote vehicle assuming the relative velocity remains constant

Note 1 to entry: For the VVICW, TTC is the time needed for the subject vehicle to reach the collision point. TTC is therefore calculated using [Formula \(1\)](#):

$$t_c = -\frac{d_c}{v_{SV}} \quad (1)$$

where

[ISO 23376:2021](https://standards.iteh.ai/catalog/standards/iso/fa00e627-27e0-48df-9b60-7d64aa571551/iso-23376-2021)

<https://standards.iteh.ai/catalog/standards/iso/fa00e627-27e0-48df-9b60-7d64aa571551/iso-23376-2021>

$t_c$  is the time to collision;

$d_c$  is the distance of the subject vehicle from the collision point;

$v_{SV}$  is the speed of the subject vehicle.

### 3.7

#### **enhanced time to collision**

##### **ETTC**

time that it takes a subject vehicle to collide with a remote vehicle assuming the relative acceleration between the subject vehicle and the remote vehicle remains constant

Note 1 to entry: For the VVICW, ETTC is the time needed for the subject vehicle to reach the collision point and not a remote vehicle. An enhanced arrival time therefore takes into consideration the acceleration of the subject vehicle. Since the collision point is fixed at any point in time, the value of zero is substituted for  $v_{RV}$  and  $a_{RV}$ . ETTC is calculated using [Formula \(2\)](#):



$$t_{c,e} = \frac{\left[ -(v_{RV} - v_{SV}) - \sqrt{(v_{RV} - v_{SV})^2 - 2 * (a_{RV} - a_{SV}) * d_c} \right]}{(a_{RV} - a_{SV})} \quad (2)$$

where

- $t_{c,e}$  is the enhanced time to collision;
- $v_{RV}$  is the speed of the remote vehicle;
- $v_{SV}$  is the speed of the subject vehicle;
- $d_c$  is the distance of the subject vehicle from the collision point;
- $a_{RV}$  is the acceleration of the remote vehicle;
- $a_{SV}$  is the acceleration of the subject vehicle.

### 3.8

#### required deceleration

$A_{req}$

minimum deceleration that, if constant, enables the subject vehicle to stop at a defined calculated distance from the current subject vehicle position

Note 1 to entry:  $A_{req}$  is calculated using [Formula \(3\)](#):

$$A_{req} = \frac{v_{SV}^2}{2(d_{sp} - d_r)} \quad (3)$$

where

- $A_{req}$  is the required deceleration;
- $v_{SV}$  is the speed of the subject vehicle;
- $d_{sp}$  is the current distance from stopping point;
- $d_r$  is the reaction travel distance.

## 4 Symbols and abbreviated terms

$A_{req}$	required deceleration
$a_{RV}$	acceleration of the remote vehicle
$a_{SV}$	acceleration of the subject vehicle
$d_c$	distance of the subject vehicle from the collision point
$d_r$	reaction travel distance
$d_{sl,min}$	minimum required distance measured from the stop line
$d_{sp}$	current distance from stopping point
DSRC	dedicated short-range communication
GNSS	global navigation satellite system

$l_{RV}$	length of the remote vehicle
$l_{SV}$	length of the subject vehicle
$T_{(1,2, \text{etc.})}$	tolerance
$t_b$	braking system response time
$t_c$	time to collision
$t_{c,e}$	enhanced time to collision
$t_{resp}$	driver brake reaction time
$v_{SV}$	speed of the subject vehicle
$v_{RV}$	speed of the remote vehicle
$v_{RV,p}$	projected speed of the remote vehicle at the arrival time
$v_{SV,max}$	maximum subject vehicle speed for VVICW operation
$v_{SV,min}$	minimum subject vehicle speed for VVICW operation
$v_{SV,p}$	projected speed of the subject vehicle at the arrival time
V2V	vehicle-to-vehicle
VVICW	vehicle-to-vehicle intersection collision warning system

## 5 Requirements

### 5.1 Minimum enable conditions

Vehicles equipped with VVICW shall be capable of the following:

- determining if the V2V communication between the SV and RVs is available at the road junction;
- receiving valid V2V communication that provides the GNSS position, speed and heading of RVs approaching the road junction;
- determining GNSS position, speed and heading of the SV approaching the road junction.

### 5.2 Minimum required VVICW scenarios

The purpose of the VVICW is to provide the drivers of the SVs with alerts that assist them in avoiding or reducing the severity of impending collisions associated with the following scenarios:

- a) Crossing scenarios (illustrated in [Figure 2](#)):
  - 1) cross straight through an intersection, across the path of a vehicle approaching from a lateral direction;
  - 2) cross straight through an intersection, after initially being stopped, across the path of a vehicle approaching from a lateral direction.
- b) Oncoming scenarios (illustrated in [Figure 3](#)):
  - 1) turn left or right (depends on left or right driving rule) across the path of an oncoming vehicle approaching from the opposite direction;