

SLOVENSKI STANDARD

SIST EN 301 238:2001

01-september-2001

8][]HUbY]nVc`ÝUbY'VfYnj f j] bYHYY_ca i b]_UWYYfB 97 HÉ! DfcZ`dcXUh_cj b]_
għcfjhYj `fB GDŁ! -nc\ fcb]dcXUh_cj b]bcg]YWg`g`YXYb`Ya `!`fġħcfjhYj HjdU8ž
a cV]bcghifUnfYXU&L

Digital Enhanced Cordless Telecommunications (DECT); Data Services Profile (DSP);
Isochronous data bearer services with roaming mobility (service type D, mobility class 2)

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 301 238:2001](#)

Ta slovenski standard je istoveten z: [EN 301 238 Version 1.2.3](#)

ICS:

33.070.30 Öð ãæ} ^ Á à[|bzæ} ^ Digital Enhanced Cordless
à|^: c|çã} ^ Á|^{\{ ``} á æs} ^ Telecommunications (DECT)
ØÙÓVD

SIST EN 301 238:2001

en

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

SIST EN 301 238:2001

<https://standards.iteh.ai/catalog/standards/sist/d9e4a50e-b7bf-4abe-8846fea0bdaec076/sist-en-301-238-2001>

ETSI EN 301 238 V1.2.3 (2000-04)

European Standard (Telecommunications series)

**Digital Enhanced Cordless Telecommunications (DECT);
Data Services Profile (DSP);
Isochronous data bearer services with roaming mobility
(service type D, mobility class 2)**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 301 238:2001

<https://standards.iteh.ai/catalog/standards/sist/d9e4a50e-b7bf-4abe-8846fea0bdaec076/sist-en-301-238-2001>



Reference

REN/DECT-020156

Keywords

data, DECT, mobility, profile, radio, roaming

ETSI

Postal address

F-06921 Sophia Antipolis Cedex - FRANCE

iTeh STANDARD PREVIEW
Office address650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 NAF 742 C

Association à but non lucratif enregistrée à la
Sous Préfecture de Grasse (06) N° 7803/88<https://standards.etsi.org/standards/sist-en-301-238-2001/7bf-4abe-8846fea0bdaec076/sist-en-301-238-2001>

Internetsecretariat@etsi.frIndividual copies of this ETSI deliverable
can be downloaded from<http://www.etsi.org>If you find errors in the present document, send your
comment to: editor@etsi.fr

Important notice

This ETSI deliverable may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF).

In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.
All rights reserved.

ETSI

Contents

Intellectual Property Rights	6
Foreword.....	6
1 Scope	7
2 References	7
3 Definitions and abbreviations.....	9
3.1 Definitions	9
3.2 Abbreviations	9
4 Description of services	11
4.1 Reference configuration	11
4.2 Service objectives.....	11
4.2.1 General.....	11
4.2.2 32 kbit/s unprotected service	12
4.2.3 Unprotected rate adaptation service.....	12
5 Physical layer (PHL) requirements	12
6 MAC layer requirements	12
6.1 32 kbit/s unprotected service	13
6.2 Unprotected rate adaptation service	13
7 DLC layer requirements	18
7.1 C-plane requirements	18
7.2 U-plane requirements	18
7.2.1 32 kbit/s unprotected service	18
7.2.2 Unprotected rate adaptation service.....	19
8 NWK layer requirements.....	19
8.1 General	19
8.2 Requirements.....	19
9 Management entity requirements	20
10 Generic interworking conventions and procedures	20
10.1 Bit ordering	20
Annex A (normative): LU9 - Unprotected Rate Adaptation for V.series Equipment (RAVE) service.....	21
A.1 Overview	21
A.1.1 FU9 frame structure.....	21
A.1.1.1 General frame structure	21
A.1.1.1.1 Mode selection	22
A.1.1.1.2 Mode-dependent fields.....	23
A.1.1.1.3 Length Indicator (LI) and FEC.....	23
A.1.1.1.3.1 BCH Coding procedure (normative)	24
A.1.1.1.3.2 BCH Decoding procedure (Informative)	24
A.1.1.1.4 Indication of Break condition.....	25
A.1.1.2 FU9 buffering procedures.....	26
A.1.1.3 Connection handover	26
A.1.1.4 Transmission order	26
A.2 Alignment signal management.....	26
A.2.1 General	26
A.2.2 Procedures	27
A.3 CCITT Recommendation V.24 signalling.....	28
A.3.1 General	28

A.3.2	Transmitter procedures	28
A.3.3	Receiver procedures	28
A.4	Rate coding	29
A.4.1	General	29
A.4.2	Transmitter procedures	30
A.4.3	Receiver procedures	30
A.5	DIC	30
A.5.1	General	30
A.5.2	Measurement of phase differences	30
A.5.3	Compensation control rules	31
A.5.3.1	General	31
A.5.3.2	Optimizing error resilience	32
A.5.3.2.1	Procedure for conveying state changes	32
A.5.3.2.2	Procedure for executing positive and negative compensation	32
A.6	Information field	32
A.6.1	General	32
A.6.2	User data rates	33
A.6.2.1	Synchronous mode	33
A.6.2.1.1	Information field location and repetition for rates up to 9,6 kbit/s	33
A.6.2.2	Asynchronous mode	34
A.6.2.2.1	Information field location and repetition for rates up to 9,6 kbit/s	34
A.6.3	Information field filling rule	36
A.7	Primitives	37

Annex B (normative): iTuh STANDARD PREVIEW (standards.itech.ai) Specific interworking conventions.....38

B.1	Interworking to connection-oriented bearer services	38
B.1.1	Scope	38
B.1.2	Reference configuration	38
B.1.2.1	PP	39
B.1.2.2	FP	39
B.1.2.3	General configuration	40
B.1.3	PP C-plane procedures	40
B.1.4	FP C-plane procedures	40
B.1.5	Network modem interworking service using CCITT Recommendation V.24 connection	41
B.1.5.1	General	41
B.1.5.2	Reference configuration	41
B.1.5.3	TAF interworking to CCITT Recommendation V.24	41
B.1.5.3.1	General	41
B.1.5.3.2	CCITT Recommendation V.24 Interchange circuit handling rules	42
B.1.5.3.3	Call establishment signalling handling	42
B.1.5.3.4	Data transmission	42
B.1.5.4	DECT FP Interworking procedures	43
B.1.5.4.1	General	43
B.1.5.4.2	Call establishment signalling handling	43
B.1.5.4.3	CCITT Recommendation V.24 Interchange circuit handling rules	44
B.1.5.4.4	Modem selection	44
B.1.5.4.5	Data transmission	44

B.2 <<IWU-ATTRIBUTES>> coding	47	
Annex C (normative):	Service D2; PT Profile Implementation Conformance Statement (ICS) - Physical layer (PHL)	50
Annex D (normative):	Service D2; FT Profile Implementation Conformance Statement (ICS) - Physical layer (PHL)	51
Annex E (normative):	Service D2; PT Profile Implementation Conformance Statement (ICS) and PT Protocol Implementation Conformance Statement (PICS) proforma - Medium Access Control (MAC) layer	52
E.1 Service D2; PT Profile Implementation Conformance Statement (ICS) - Medium Access Control (MAC) layer	53	
E.2 Service D2; PT Protocol Implementation Conformance Statement (PICS) proforma - Medium Access Control (MAC) layer.....	54	
Annex F (normative):	Service D2; FT Profile Implementation Conformance Statement (ICS) and Protocol Implementation Conformance Statement (PICS) proforma - Medium Access Control (MAC) layer	61
F.1 Service D2; FT Profile Implementation Conformance Statement (ICS) - Medium Access Control (MAC) layer	62	
F.2 Service D2; FT Protocol Implementation Conformance Statement (PICS) proforma - Medium Access Control (MAC) layer.....	63	
Annex G (normative):	iTeh STANDARD PREVIEW Service D2; PT Profile Implementation Conformance Statement (ICS) - Data Link Control (DLC) layer	67
G.1 C-plane	67	
G.2 U-plane	67	
G.2.1 U-plane 32 kbit/s unprotected service	67	
G.2.2 U-plane unprotected rate adaptation service	67	
Annex H (normative):	Service D2; FT Profile Implementation Conformance Statement (ICS) - Data Link Control (DLC) layer	68
H.1 C-plane	68	
H.2 U-plane	68	
H.2.1 U-plane 32 kbit/s unprotected service	68	
H.2.2 U-plane unprotected rate adaptation service	68	
Annex J (normative):	Service D2; PT profile Requirement List (profile RL) and Protocol Implementation Conformance Statement (PICS) proforma - Network (NWK) layer	69
J.1 Service D2; PT profile Requirement List (profile RL) - Network (NWK) layer	69	
J.2 Service D2; PT Protocol Implementation Conformance Statement (PICS) proforma - Network (NWK) layer.....	70	
Annex K (normative):	Service D2; FT profile Requirement List (profile RL) and Protocol Implementation Conformance Statement (PICS) proforma - Network (NWK) layer	71
K.1 Service D2; FT profile Requirement List (profile RL) - Network (NWK) layer	71	
K.2 Service D2; FT Protocol Implementation Conformance Statement (PICS) proforma - Network (NWK) layer.....	72	
History	73	

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipro>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Project Digital Enhanced Cordless Telecommunications (DECT).

National transposition dates	
Date of adoption of this EN:	3 March 2000
Date of latest announcement of this EN (doa):	30 June 2000
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 December 2000
Date of withdrawal of any conflicting National Standard (dow):	31 December 2000

SIST EN 301 238:2001
<https://standards.iteh.ai/catalog/standards/sist/d9e4a50e-b7bf-4abe-8846fea0bdaec076/sist-en-301-238-2001>

1 Scope

The present document specifies a profile for Digital Enhanced Cordless Telecommunications (DECT) systems conforming to EN 300 175-1 [1], EN 300 175-2 [2], EN 300 175-3 [3], EN 300 175-4 [4], EN 300 175-5 [5], EN 300 175-6 [6] and EN 300 175-7 [7]. It is part of a family of profiles aimed at the general connection of terminals supporting non-voice services to a fixed infra-structure, private and public.

The type D service, mobility class 2, as described in the ETR 185 [9] supports Isochronous Data Bearer Services (IDBSs) with mobility and is suitable for transparent transfer of isochronous data streams. It is intended for use in private and public roaming applications. Video telephony, video conferencing and secure telephone services (end-to-end encrypted) over external networks can be considered as applications of IDBS.

Phase 1 of the present document defines an unprotected service offering an unrestricted digital 32 kbit/s data bearer service, strongly based on the Generic Access Profile (GAP) (defined in EN 300 444 [8]), and an unprotected single bearer, multi-rate, rate adaptation service to interwork to synchronous ITU-T Recommendations V.series interfaces.

In addition to the above, the current D.2 service supports an asynchronous version of the unprotected single bearer, multi-rate, rate adaptation service to interwork with asynchronous ITU-T Recommendations V.series interfaces.

Further phases of this profile may additionally provide multiple rate, multibearer support and limited error correction capability for services/applications requiring higher rates and high quality isochronous data transmission.

The present document specifies the requirements on the Physical (PHL) layer, Medium Access Control (MAC) layer, Data Link Control (DLC) layer and Network (NWK) layer of DECT. The present document also specifies Management Entity (ME) requirements and generic Interworking Conventions (IC).

iTeh STANDARD PREVIEW

2 References ([standards.iteh.ai](https://standards.iteh.ai/catalog/standards/sist/d9e4a50e-b7bf-4abe-8846-fea0bdaec076/sist-en-301-238-2001))

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

<https://standards.iteh.ai/catalog/standards/sist/d9e4a50e-b7bf-4abe-8846-fea0bdaec076/sist-en-301-238-2001>

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

- [1] ETSI EN 300 175-1: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 1: Overview".
- [2] ETSI EN 300 175-2: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 2: Physical layer (PHL)".
- [3] ETSI EN 300 175-3: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 3: Medium Access Control (MAC) layer".
- [4] ETSI EN 300 175-4: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 4: Data Link Control (DLC) layer".
- [5] ETSI EN 300 175-5: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 5: Network (NWK) layer".
- [6] ETSI EN 300 175-6: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 6: Identities and addressing".
- [7] ETSI EN 300 175-7: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 7: Security features".

- [8] ETSI EN 300 444: "Digital Enhanced Cordless Telecommunications (DECT); Generic Access Profile (GAP)".
- [9] ETSI ETR 185: "Digital Enhanced Cordless Telecommunications (DECT); Data Services Profile (DSP); Profile overview".
- [10] ETSI ETS 300 474-1: "Digital Enhanced Cordless Telecommunications (DECT); Generic Access Profile (GAP); Profile requirement list and profile specific Implementation Conformance Statement (ICS) proforma; Part 1: Portable radio Termination (PT)".
- [11] ETSI ETS 300 474-2: "Digital Enhanced Cordless Telecommunications (DECT); Generic Access Profile (GAP); Profile requirement list and profile specific Implementation Conformance Statement (ICS) proforma; Part 2: Fixed radio Termination (FT)".
- [12] ETSI EN 300 476-1: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Protocol Implementation Conformance Statement (PICS) proforma; Part 1: Network (NWK) layer - Portable radio Termination (PT)".
- [13] ETSI EN 300 476-3: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Protocol Implementation Conformance Statement (PICS) proforma; Part 3: Medium Access Control (MAC) layer - Portable radio Termination (PT)".
- [14] ETSI EN 300 476-4: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Protocol Implementation Conformance Statement (PICS) proforma; Part 4: Network (NWK) layer - Fixed radio Termination (FT)".
- [15] ETSI EN 300 476-6: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Protocol Implementation Conformance Statement (PICS) proforma; Part 6: Medium Access Control (MAC) layer - Fixed radio Termination (FT)".
- [16] ITU-T Recommendation H.324: "Terminal for low bit-rate multimedia communication".
- [17] CCITT Recommendation R.140: "Definitions of essential technical terms in the field of telegraph transmission".
SIST EN 301 238:2001
<https://standards.itech.ai/catalog/standards/sist/d9e4a50e-b7bf-4abe-8846>
- [18] CCITT Recommendation V.21: "300 bits per second duplex modem standardized for use in the general switched telephone network".
- [19] CCITT Recommendation V.22: "1 200 bits per second duplex modem standardized for use in the general switched telephone network and on point-to-point 2-wire leased telephone-type circuits".
- [20] CCITT Recommendation V.22bis: "2 400 bits per second duplex modem using the frequency division technique standardized for use on the general switched telephone network and on point-to-point 2-wire leased telephone-type circuits".
- [21] CCITT Recommendation V.23: "600/1 200-baud modem standardized for use in the general switched telephone network".
- [22] CCITT Recommendation V.24: "List of definitions for interchange circuits between data terminal equipment (DTE) and data circuit-terminating equipment (DCE)".
- [23] CCITT Recommendation V.26bis: "2 400/1 200 bits per second modem standardized for use in the general switched telephone network".
- [24] CCITT Recommendation V.26ter: "2 400 bits per second duplex modem using the echo cancellation technique standardized for use on the general switched telephone network and on point-to-point 2-wire leased telephone-type circuits".
- [25] CCITT Recommendation V.27: "4 800 bits per second modem with manual equalizer standardized for use on leased telephone-type circuits".
- [26] CCITT Recommendation V.27ter: "4 800/2 400 bits per second modem standardized for use in the general switched telephone network".

- [27] ITU-T Recommendation V.32: "A family of 2-wire, duplex modems operating at data signalling rates of up to 9 600 bit/s for use on the general switched telephone network and on leased telephone-type circuits".
 - [28] ITU-T Recommendation V.34: "A modem operating at data signalling rates of up to 33 600 bit/s for use on the general switched telephone network and on leased point-to-point 2-wire telephone-type circuits".
 - [29] ITU-T Recommendation V.110: "Support by an ISDN of data terminal equipments with V-Series type interfaces".
 - [30] ITU-T Recommendation V.120: "Support by an ISDN of data terminal equipment with V-Series type interfaces with provision for statistical multiplexing".
 - [31] ITU-T Recommendation X.21: "Interface between Data Terminal equipment and Data Circuit-terminating Equipment for synchronous operation on public data networks".
-

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

- a) the definitions in EN 300 444 [8]; and
- b) the following terms: **iTeh STANDARD PREVIEW**

bearer service: type of telecommunications service that provides the capability for the transmission of signals between user/network interfaces. For DECT systems, the Air (Radio) interface provides the bearer services between the DECT Fixed radio Termination and the DECT Portable radio Termination.

isochronous: pertaining to a signal or a time-varying phenomenon characterized by significant instants separated by time intervals having a duration theoretically equal to the duration of a unit interval or to an integral multiple of this duration (CCITT Recommendation R.140 [17]).

mobility class 1: closed user groups, for which terminals are pre-registered off-air with one or more specific Fixed Parts (FP), and establishment of service and user parameters is therefore implicit, according to a profile-defined list.

mobility class 2: private and public roaming applications for which terminals may move between FPs within a given domain and for which association of service parameters is explicit at the time of service request.

service: set of functions offered to a user by an organization.

synchronous: essential characteristics of time-scales or signals such that their corresponding significant instants occur at precisely the same average rate (not in CCITT Recommendation R.140 [17]).

synchronous transmission: transmission using isochronous signals in which the sending and receiving instruments are operating continuously in a constant time difference between corresponding significant instants (CCITT Recommendation R.140 [17]).

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AAL	ATM Adaptation Layer
ATM	Asynchronous Transfer Mode
CC	Call Control
C-plane	Control plane
CRC	Cyclic Redundancy Check
C _S	higher layer signalling Channel (slow)
DCE	Data Circuit-terminating Equipment

DIC	DECT Independent Clocking
DLC	Data Link Control
DSP	Data Services Profile
DTE	Data Terminal Equipment
FP	Fixed Part
FT	Fixed radio Termination
GAP	Generic Access Profile
GSM	Global System for Mobile communication
I	higher layer Information channel
IC	Interworking Conventions
ICS	Implementation Conformance Statement
IDBS	Isochronous Data Bearer Service
IE	Information Element
ISDN	Integrated Services Digital Network
IWF	Interworking Functions
IWU	Interworking Unit
LA	Location Area
LCE	Link Control Entity
LCN	Logical Connection Number
MAC	Medium Access Control
ME	Management Entity
MM	Mobility Management
MUX	MULTipleX
NWK	NetWorK
PHL	PHysical Layer
PHY	PHYsical
PICS	Protocol Implementation Conformance Statement
PP	Portable Part
ppm	parts per million
PSTN	Public Switched Telephone Network
PT	Portable radio Termination
RAVE	Rate Adaption for V.series Equipment
RFP	Radio Fixed Part
SAP	Service Access Point
SDU	Service Data Unit
TAF	Terminal Adaptation Functions
TDMA	Time Division Multiple Access
ULEI	U-plane Link Endpoint Identifier
U-plane	User plane

THE STANDARD PREVIEW
(standards.iteh.ai)

4 Description of services

4.1 Reference configuration

The reference configuration for this profile shall be as shown in figure 1.

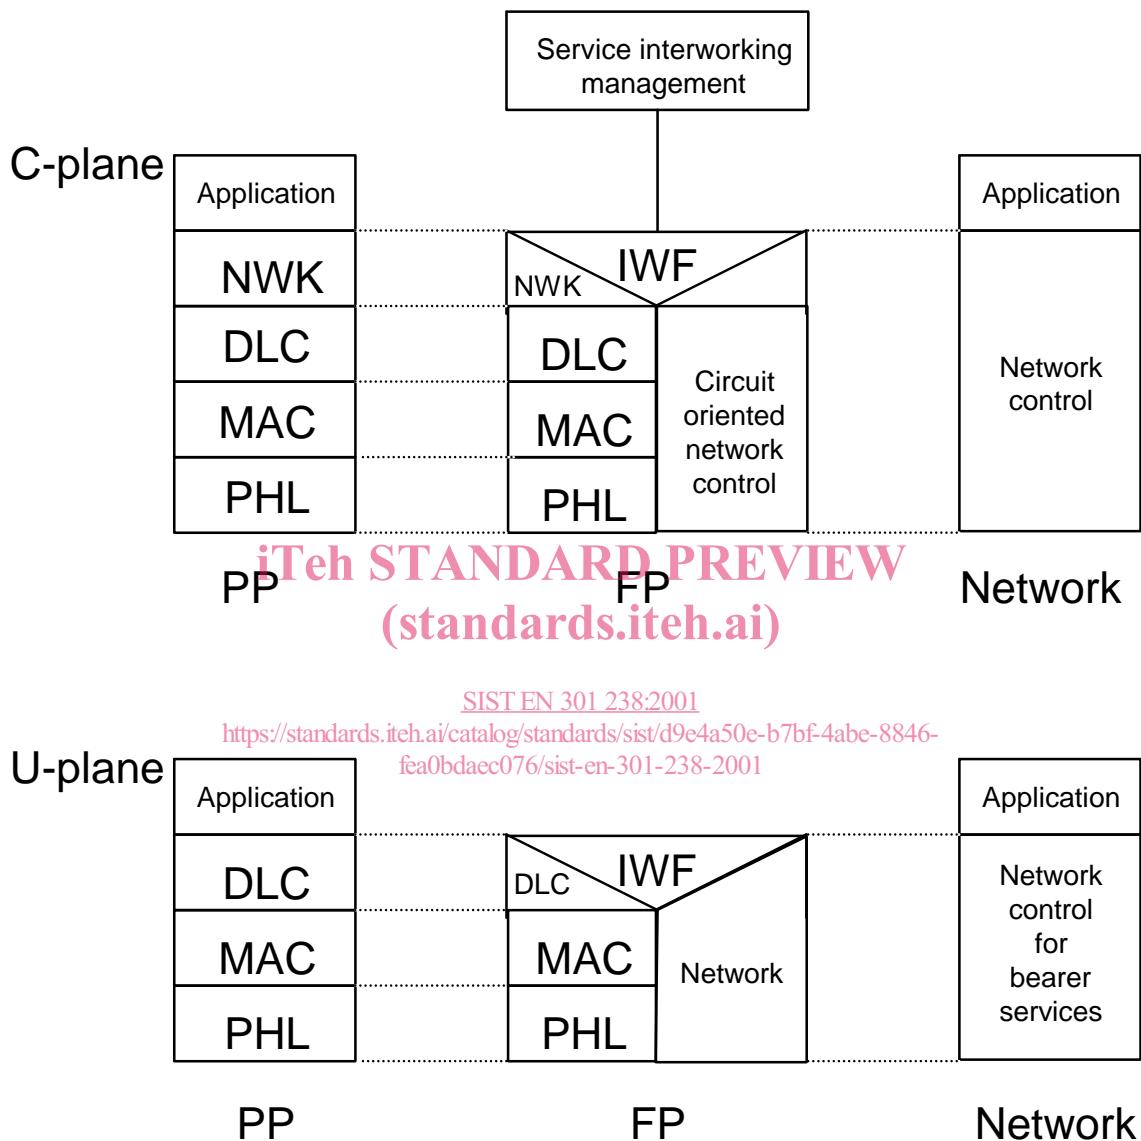


Figure 1: Profile reference configuration showing interworking to connection-oriented networks via the C-plane and U-plane

4.2 Service objectives

4.2.1 General

The service objectives for the Control plane (C-plane) are those of mobility class 2, described in subclause 6.2.2 of ETR 185 [9].

The service objectives for the User plane (U-plane) are listed in subclauses 4.2.2 and 4.2.3.

4.2.2 32 kbit/s unprotected service

The U-plane service objective for the unprotected service are detailed in table 1.

Table 1: Service objectives of the 32 kbit/s unprotected service

Transfer mode	Circuit mode
Transfer capability	Unrestricted digital
Data structure integrity	semi-octet
Continuous data rate	32 kbit/s
User data protection	none
User data delay	10 ms
Service change and negotiation	optional
Encryption support	mandatory

4.2.3 Unprotected rate adaptation service

The U-plane service objective for the unprotected rate adaptation service are detailed in table 2.

Table 2: Service objectives of the unprotected rate adaptation service

Transfer mode	Circuit mode
Transfer capability	Unrestricted digital
Data structure integrity	octet
Continuous data rate	by steps of 2,4 kbit/s up to 28,8 kbit/s, and by steps of 4 kbit/s up to 28,0 kbit/s
User data protection	none
User data delay	15 ms
Service change and negotiation	optional
Encryption support	SIST EN 301 238:2001 supported
Network independent clocking	supported
In band rate changes	supported
CCITT Recommendation V.24 [22] control signalling	optional
Asymmetric rates	supported

5 Physical layer (PHL) requirements

The requirements of the GAP, defined in EN 300 444 [8], clause 11 shall apply, with the following exception:

- in subclause 11.1, the sentence "To carry the speech information, full slots shall be used" shall be replaced by "full slots shall be used".

6 MAC layer requirements

For both the services, the following shall apply:

- a) bit a12 of the Fixed Part Capabilities message (defined in EN 300 175-3 [3], subclause 7.2.3.4) shall be set to 1; and
- b) the MAC Extended Fixed Part Capabilities message (defined in EN 300 175-3 [3], subclause 7.2.3.5) shall be used and bit a44 of Extended capabilities field shall be set to 1.

NOTE: The Extended Fixed Part Capabilities message is broadcast by a FP to indicate the support of the D profile.

6.1 32 kbit/s unprotected service

The requirements of the GAP, defined in EN 300 444 [8], clause 10 shall apply.

6.2 Unprotected rate adaptation service

The requirements of GAP, defined in EN 300 444 [8], clause 10 shall apply, with the following additions/variations (a to j):

- a) replace subclause 10.1 with the following text:

10.1 General

The FT and PT shall support In_normal_delay service as defined in EN 300 175-3 [3], subclause 10.8.3.2.

The FT and PT shall support frame format as follows:

- full slot mode defined in EN 300 175-3 [3], subclause 4.2.2;
- D-field mapping shall support the D-00 and D32 as defined in EN 300 175-3 [3], subclause 6.2.1.1.

The FT and PT shall support A-field mapping A-MAP.

The FT and PT shall understand all A field tail identifications (a0, a1 and a2) in the header field as defined in EN 300 175-3 [3], subclauses 6.2.1.2 and 7.1.2.

The FT and PT shall support the following B-field field identifications (a4, a5 and a6) as defined in EN 300 175-3 [3], subclause 7.1.4:

iTeh STANDARD PREVIEW
(standards.iteh.ai)

- U-type: In, '000'B;
- no B-field, '111' B (shall only be used for dummy bearers).

SIST EN 301 238:2001

The FT and PT shall support T-MUX as defined in EN 300 175-3 [3], subclause 6.2.2.1.8846-
fea0bdaec076/sist-en-301-238-2001

The FT and PT shall support B-field multiplex E/U MUX type U32a.

The FT and PT shall support scrambling as defined in EN 300 175-3 [3], subclause 6.2.4.

The FT and PT shall provide R-CRC generation and checking as defined in EN 300 175-3 [3], subclause 6.2.5.2. The FT and PT shall provide X-CRC generation and checking as defined in EN 300 175-3 [3], subclauses 6.2.5.3 and 6.2.5.4.

The PT shall support the normal duty cycle idle_locked mode as defined in EN 300 175-3 [3], subclauses 11.3 and 4.3.1.

The FT and PT shall support primary scan procedure as defined in EN 300 175-3 [3], subclause 11.8.