INTERNATIONAL STANDARD

ISO 14405-2

Second edition 2018-12

Geometrical product specifications (GPS) — Dimensional tolerancing —

Part 2:

Dimensions other than linear or angular sizes

iTeh ST Spécification géométrique des produits (GPS) — Tolérancement dimensionnel — Stante 2: Dimensions autres que tailles linéaires ou angulaires

ISO 14405-2:2018 https://standards.iteh.ai/catalog/standards/sist/185a75e3-537c-4b1b-9daa-8ed46dc418f9/iso-14405-2-2018



iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 14405-2:2018 https://standards.iteh.ai/catalog/standards/sist/185a75e3-537c-4b1b-9daa-8ed46dc418f9/iso-14405-2-2018



COPYRIGHT PROTECTED DOCUMENT

© ISO 2018

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office CP 401 • Ch. de Blandonnet 8 CH-1214 Vernier, Geneva Phone: +41 22 749 01 11 Fax: +41 22 749 09 47 Email: copyright@iso.org Website: www.iso.org

Published in Switzerland

ii

Con	tents	Page
Forew	ord	iv
Introd	luction	v
1	Scope	1
2	Normative references	1
3	Terms and definitions	2
4	Principles and rules for indication of dimensions and related tolerances	2
5	Units used in drawings for dimensions	
6	Indication of tolerances for linear or angular dimensions	4
7	Illustrations of ambiguous ± tolerancing vs. unambiguous geometrical specifications 7.1 General	4 6 7 8 8
8	Angular tolerancing 8.1 Examples of geometrical specifications applied to angular distance between two integral features 8.2 Angular distance between an integral feature and a derived feature	10 10
	A (informative) Explanations and examples of the ambiguity caused by using ± tolerances for dimensions other than linear size or angular size https://standards.iteh.ai/catalog/standards/sist/185a/75e3-537c-4b1b-9daa- B (informative) Relation to the GPS matrix model	13
Biblio	graphy	22

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html. (standards.iteh.ai)

This document was prepared by Technical Committee ISO/TC 213, *Dimensional and geometrical product specifications and verification*.

ISO 14405-2:2018

https://standards.iteh.ai/catalog/standards/sist/185a75e3-537c-4b1b-9daa-

This second edition cancels and replaces the first edition (ISO 14405-2:2011), which has been technically revised.

The main changes compared to the previous edition are as follows:

- the addition of angular sizes to reflect ISO 14405-3;
- clarifications around specification ambiguity and the use of geometrical tolerancing;
- a review and update of all normative references and other ISO GPS standards referenced in the text.

A list of all parts in the ISO 14405 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

This document is a geometrical product specification (GPS) standard and is to be regarded as a general GPS standard (see ISO 14638). It influences chain link A of the chain of standards on distance.

The ISO GPS Matrix model given in ISO 14638 gives an overview of the ISO GPS system of which this document is a part. The fundamental rules of ISO GPS given in ISO 8015 apply to this document and the default decision rules given in ISO 14253-1 apply to specifications made in accordance with this document, unless otherwise indicated.

For dimensions other than linear or angular sizes, the requirement is ambiguous when applied to the real workpiece. It is the presence of form and angular deviations on all real workpieces that makes these requirements ambiguous, i.e. there is a specification ambiguity.

This specification ambiguity can only be avoided for features of size toleranced in accordance with ISO 14405-1 or ISO 14405-3. For all other dimensions, geometrical specifications should be used in order to control the specification ambiguity.

For more detailed information on the relation of this document to other standards and to the GPS matrix model, see <u>Annex B</u>.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 14405-2:2018 https://standards.iteh.ai/catalog/standards/sist/185a75e3-537c-4b1b-9daa-8ed46dc418f9/iso-14405-2-2018

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 14405-2:2018 https://standards.iteh.ai/catalog/standards/sist/185a75e3-537c-4b1b-9daa-8ed46dc418f9/iso-14405-2-2018

Geometrical product specifications (GPS) — Dimensional tolerancing —

Part 2:

Dimensions other than linear or angular sizes

1 Scope

This document illustrates the ambiguity caused by the use of dimensional specifications to control properties other than linear or angular size and the benefit of using geometrical specifications instead.

Dimensional tolerancing can be indicated by ± tolerancing or geometrical specifications.

The ambiguity caused by using \pm tolerances for dimensions other than linear or angular sizes (for individual tolerances and general tolerances according to, e.g. ISO 2768-1 and ISO 8062-3) is explained in Annex A.

NOTE 1 The figures, as shown in this document, merely illustrate the text and are not intended to reflect actual usage. The figures are consequently simplified to indicate only the relevant principles.

NOTE 2 For indications of dimensional specifications, see the following:

- ISO 14405-1 for linear size;
- ISO 14405-3 for angular size;

ISO 14405-2:2018

(standards.iteh.ai)

- https://standards.iteh.ai/catalog/standards/sist/185a75e3-537c-4b1b-9daa ISO 2538-1 and ISO 2538-2 for wedges: dc418f9/iso-14405-2-2018
- ISO 3040 for cones.

NOTE 3 The rules for geometrical specifications are given in ISO 1101.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 129-1, Technical product documentation (TPD) — Presentation of dimensions and tolerances — Part 1: General principles

ISO 1101, Geometrical product specifications (GPS) — Geometrical tolerancing — Tolerances of form, orientation, location and run-out

ISO 8015, Geometrical product specifications (GPS) — Fundamentals — Concepts, principles and rules

ISO 13715, Technical product documentation — Edges of undefined shape — Indication and dimensioning

ISO 14405-1, Geometrical product specifications (GPS) — Dimensional tolerancing — Part 1: Linear sizes

ISO 14405-3, Geometrical product specifications (GPS) - Dimensional tolerancing - Part 3: Angular sizes

ISO 17450-1, Geometrical product specifications (GPS) — General concepts — Part 1: Model for geometrical specification and verification

ISO 14405-2:2018(E)

ISO 17450-2, Geometrical product specifications (GPS) — General concepts — Part 2: Basic tenets, specifications, operators, uncertainties and ambiguities

ISO 17450-3, Geometrical product specifications (GPS) — General concepts — Part 3: Toleranced features

Terms and definitions 3

For the purposes of this document, the terms and definitions given in ISO 129-1, ISO 1101, ISO 8015, ISO 13715, ISO 14405-1, ISO 14405-3, ISO 17450-1, ISO 17450-2, ISO 17450-3 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at https://www.iso.org/obp
- IEC Electropedia: available at http://www.electropedia.org/

The term "drawing" is used in this document as a synonym for the 2D drawing, the 3D model and other representations of the workpiece.

3.1

± tolerancing

tolerancing using dimension and indication of limit deviations, dimension limit values or unilateral dimension limit

Note 1 to entry: The sign ± should not be understood in a way that the limit deviations are always symmetrical to the nominal size. iTeh STANDARD PREVIEW

3.2

linear size

dimension in length units characterizing a feature of size

ISO 14405-2:2018

(standards.iteh.ai)

3.3 angular size https://standards.iteh.ai/catalog/standards/sist/185a75e3-537c-4b1b-9daa-

8ed46dc418f9/iso-14405-2-2018

dimension in angle units characterizing a feature of size

3.4

distance

dimension between two geometrical features which are not considered as a feature of size

Note 1 to entry: Distance can be between two integral features or an integral feature and a derived feature or two derived features.

Note 2 to entry: Linear distance (3.4.1) and angular distance (3.4.2) exist.

3.4.1

linear distance

distance (3.4) in length units

3.4.2

angular distance

distance (3.4) in angle units

Principles and rules for indication of dimensions and related tolerances

The general rules and principles for indicating ± tolerances given in ISO 14405-1 and ISO 14405-3 apply to this document and are the basis for tolerancing on mechanical engineering drawings. In all other cases, special rules apply.

For rules on the indication of units, see <u>Clause 5</u>.

For dimensions other than linear or angular sizes, a requirement with \pm tolerancing is ambiguous (specification ambiguity) when applied to a real workpiece. This type of specification is not recommended; see Annex A.

Specification ambiguity of dimensional specifications can be avoided for linear features of size when specified in accordance with ISO 14405-1 and for angular features of size when specified in accordance with ISO 14405-3. In order to minimize specification ambiguity, geometrical specifications shall be used for the cases illustrated in Table 1.

Unless otherwise specified, e.g. by using CZ according to ISO 1101 or [™] according to ISO 2692, tolerances on mechanical engineering drawings are independent requirements without any relationships to other requirements for the same feature(s). This is the independency principle (see ISO 8015).

Characterization, type Type of Details in and number of features dimension Radius Integral or derived 7.5, A.6, A.7 dimension One feature Integral or derived Arc length A.12 Facing Linear distance the same <u>7.2</u>, <u>A.2</u> or step height direction Integral — Facing integral Linear eh Two features the Linear distance <u>7.2</u>, <u>7.6</u>, <u>A.3</u>, <u>A.8</u> opposite dimension (standards.iteh direction (length units) Linear distance 7.3, 7.7, A.4, A.9 Integral — derived 1440 Derived — derived Linear distance 7.4, A.5 https://standards.iteh.ai/catalog/ Edge andards/sist/185a75 Chamfer Chamfer height (transi-A.11 f9/iso-14405-2-201 Dimension and angle shape tion region Integral between Round-Edge radius A.11 two integral ing shape features) 8.1 ISO 14405-3 Angular Integral — integral distance ISO 2538-1 Angular dimension Two features ISO 2538-2 (angle units) Angular Integral — derived 8.2, A.10 distance Angular Derived — derived distance

Table 1 — Types of dimensions which are not sizes

5 Units used in drawings for dimensions

The default units for dimensions are the following.

- For linear dimensions and associated tolerance limits, the unit is the millimetre (mm).
- For angular dimensions and associated tolerance limits, the unit is the degree (360°). Decimal degrees or degrees, minutes and seconds can be used.

For a linear dimension, the unit is not indicated; it is implied.

ISO 14405-2:2018(E)

For an angular dimension, the unit shall be indicated for the nominal value and for the tolerance limit indication.

If a unit other than the default is used, the unit shall be indicated in or near the title block of the drawing.

6 Indication of tolerances for linear or angular dimensions

Indication of tolerances for linear dimensions shall be in accordance with the indication rules in ISO 14405-1.

Indication of tolerances for angular dimensions shall be in accordance with the indication rules in ISO 14405-3.

7 Illustrations of ambiguous ± tolerancing vs. unambiguous geometrical specifications

7.1 General

This clause shows examples of the use of geometrical specifications for dimensions which are not linear sizes or angular sizes. Geometrical specifications can be used to avoid the ambiguity of dimensions with ± tolerances. Generally, requirements based on geometrical specifications have no, or very low, specification ambiguity.

The ambiguity caused by using ± tolerances is described in Annex A.T. V. F. W.

If geometrical specifications are used, several different solutions are normally possible. The examples in this clause show some of these possibilities.

Each example is accompanied by a figure illustrating the use of ± tolerancing, which is ambiguous and therefore has high specification ambiguity. (See Annex A for explanations and examples of the ambiguity associated with ± tolerancing for dimensions other than linear or angular sizes.)

For more details about geometrical specifications, see ISO 1101.

7.2 Linear distance between two integral features

See Figure 1.

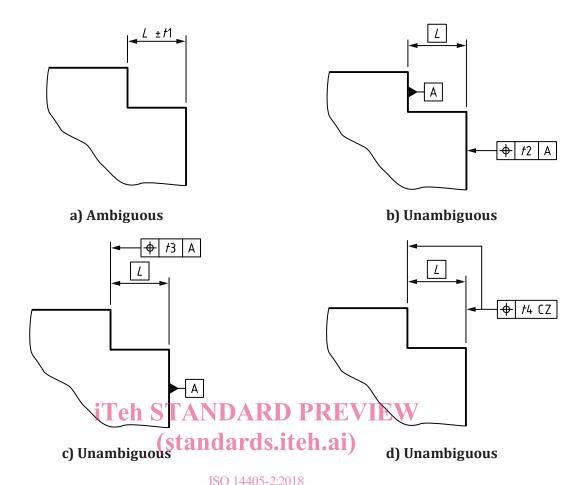


Figure 1 — Example of a linear step dimension, a) and three different solutions using geometrical specifications, b), c) and d)

NOTE 1 Figure 1 a) shows an example of the use of \pm tolerances for a dimension. This is ambiguous and can result in high specification ambiguity; see Annex A.

NOTE 2 Figure 1 b), c) and d) show different solutions using geometrical specifications. These are unambiguous and can result in no, or very low, specification ambiguity.

NOTE 3 In Figure 1 b), a datum plane A is established on datum feature A, the left-hand vertical nominal flat surface. Datum A aligns the workpiece in space. The right-hand vertical flat surface is toleranced by a position tolerance zone at a theoretically exact dimension (TED) distance *L*.

NOTE 4 In Figure 1 c), a datum plane A is established on datum feature A, the right-hand vertical nominal flat surface. Datum A aligns the workpiece in space. The left-hand vertical flat surface is toleranced by a position tolerance zone at a TED distance L.

NOTE 5 In Figure 1 d), no datum is indicated. The workpiece is aligned in space considering simultaneously the two vertical flat surfaces. The two flat surfaces are toleranced in relation to each other by position tolerance zones at a distance L apart.

<u>Figure 2</u> shows an example with two integral features facing opposite directions. However, the principle is the same as in <u>Figure 1</u>.

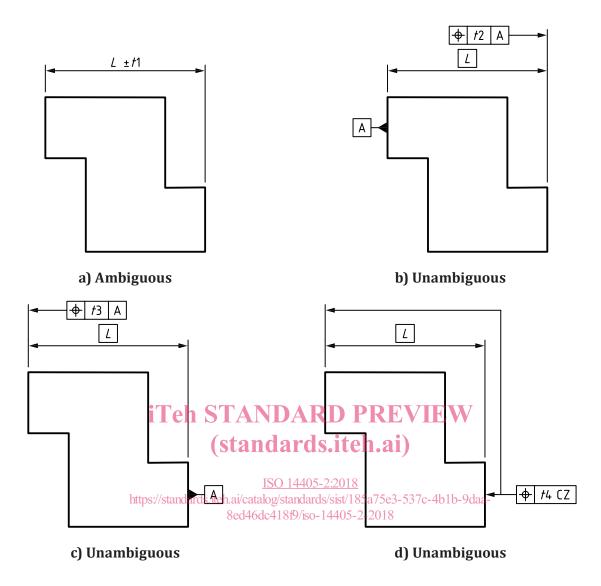


Figure 2 — Example of a linear distance between two integral features facing opposite directions – not a feature of size – a), and three different solutions using geometrical specifications, b), c) and d)

7.3 Linear distance between an integral and a derived feature

See Figure 3.