
**Rough-terrain trucks — Safety
requirements and verification —**

**Part 1:
Variable-reach trucks**

Chariots tout-terrain — Exigences de sécurité et vérification —

Partie 1: Chariots à portée variable

iteh Standards
(<https://standards.iteh.ai>)
Document Preview

ISO 10896-1:2020

<https://standards.iteh.ai/catalog/standards/iso/56165cf6-2d98-446c-ba8b-0d5f0848f5ec/iso-10896-1-2020>



iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

ISO 10896-1:2020

<https://standards.iteh.ai/catalog/standards/iso/56165cf6-2d98-446c-ba8b-0d5f0848f5ee/iso-10896-1-2020>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	vi
Introduction	vii
1 Scope	1
2 Normative references	2
3 Terms and definitions	3
4 Safety requirements and/or protective/risk reduction measures	8
4.1 General	8
4.1.1 General	8
4.1.2 Sharp edges and acute angles	8
4.1.3 Stored energy components	8
4.2 Starting/moving and stopping	8
4.2.1 Unauthorized starting	8
4.2.2 Stopping system	8
4.2.3 Unintended movement	8
4.2.4 Uncontrolled motion	9
4.2.5 Powered travel movement	9
4.2.6 Non-activation of the parking brake	9
4.2.7 Brakes	9
4.3 Electrical and electronic systems	9
4.3.1 General	9
4.3.2 Degree of protection	10
4.3.3 Electrical connections	10
4.3.4 Batteries	11
4.4 Controls	11
4.4.1 General	11
4.4.2 Multiple operating positions	13
4.4.3 Controls of trucks accessible from ground level	13
4.4.4 Inadvertent activation	13
4.4.5 Travel controls	13
4.4.6 Differential locking	15
4.4.7 Steering controls	15
4.4.8 Load-handling controls	16
4.4.9 Multi-function controls	17
4.4.10 Stabilizing device control	17
4.4.11 Sway/levelling control	17
4.4.12 Axle oscillation locking-mechanism control	17
4.4.13 Hand throttle control	17
4.5 Power systems and accessories	17
4.5.1 Exhaust systems	17
4.5.2 Cooling systems	18
4.5.3 Tanks and pressure vessels	18
4.6 Stabilizing devices	18
4.7 Design requirements for maintenance purposes	19
4.7.1 General	19
4.7.2 Tilttable cab support device	19
4.8 Systems for lifting, tilting and reaching	19
4.8.1 Chains and wire ropes	19
4.8.2 Hydraulic system	20
4.8.3 Maximum load-lowering speed	21
4.8.4 Limitation of stroke	21
4.8.5 Fork arms, attachments and attachment brackets	21
4.9 Operator's station	21
4.9.1 General requirements	21

4.9.2	Storage of operator's manual	21
4.9.3	Hot parts	21
4.9.4	Pipes and hoses	22
4.9.5	Operator's station equipped with enclosed cab	22
4.9.6	Operator's seat	24
4.9.7	Control panels and symbols on displays	25
4.9.8	Other indicating devices	25
4.10	Operator access	25
4.10.1	General requirements	25
4.10.2	Enclosed cab openings	25
4.11	Protective measures and devices	26
4.11.1	Hot parts	26
4.11.2	Protection against crushing, shearing and trapping	26
4.11.3	Guards	26
4.11.4	Engine compartment	26
4.11.5	Fenders	27
4.11.6	Roll-over protective structures (ROPS) and falling object protective structures (FOPS)	27
4.11.7	Elevating and/or tiltable operator's station	27
4.11.8	Audible warning devices	27
4.12	Stability	27
4.12.1	Stability tests on tilting platform	27
4.12.2	Longitudinal load moment control	27
4.13	Visibility	27
4.14	External lighting devices	27
4.15	Fire protection	28
4.15.1	Fire resistance	28
4.15.2	Fire extinguisher	28
4.16	Retrieval, transportation, lifting and towing	28
4.16.1	General	28
4.16.2	Retrieval	28
4.16.3	Tie-down	28
4.16.4	Lifting	28
4.16.5	Towing	28
4.17	Noise	28
4.18	Electromagnetic compatibility	29
5	Verification of requirements and safety measures	29
5.1	General	29
5.2	Functional verification	29
5.3	Structural verification	29
5.3.1	Test loads	29
5.3.2	Static test	29
5.3.3	Dynamic testing	30
5.4	Load holding verification	30
5.5	Maximum load lowering speed	30
6	Information for use	31
6.1	Instruction handbook	31
6.1.1	General	31
6.1.2	Operating and maintenance instructions	31
6.1.3	Instructions regarding the truck	32
6.1.4	Instructions regarding the operational use of the truck	32
6.1.5	Instructions regarding internal combustion engine trucks	33
6.1.6	Instructions regarding transportation and storage of trucks	33
6.1.7	Instructions regarding inspection and routine maintenance	33
6.2	Graphical symbols and warnings	34
6.2.1	Safety signs and graphical symbols	34
6.2.2	Graphical symbols lift point	34

6.2.3	Graphical symbols tie-down point	34
6.2.4	Graphical symbols of retrieval point	34
6.2.5	Graphical symbols for pneumatic tyre inflation pressures	35
6.2.6	Graphical symbol for fuel filling points	35
6.2.7	Graphical symbol for hydraulic fluid filling points	35
6.2.8	Graphical symbol for stored energy components	36
6.2.9	Graphical symbol for brake fluid filling points	36
6.2.10	Graphical symbol for battery disconnection	36
6.2.11	Warnings	36
6.3	Marking	37
6.3.1	Manufacturer plate(s)	37
6.4	Load charts	37
6.4.1	Trucks with load-carrying attachments	37
6.4.2	Trucks with non-load-carrying attachments	38
Annex A (informative) List of significant hazards		39
Annex B (normative) Attachments and attachment brackets		43
Annex C (normative) Elevating operator's stations		46
Bibliography		48

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

ISO 10896-1:2020

<https://standards.iteh.ai/catalog/standards/iso/56165cf6-2d98-446c-ba8b-0d5f0848f5ec/iso-10896-1-2020>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

This document was prepared by Technical Committee ISO/TC 110, *Industrial trucks*, Subcommittee SC 4, *Rough-terrain trucks*.

This second edition cancels and replaces the first edition (ISO 10896-1:2012), which has been technically revised.

The main changes compared to the previous edition are as follows:

- the document has been aligned with regional standards;
- a new steering test has been added;
- new requirements for the hydraulic circuit have been introduced.

A list of all parts in the ISO 10896 series can be found on the ISO website.

Introduction

This document is a type-C standard as stated in ISO 12100.

This document is of relevance, in particular, for the following stakeholder groups representing the market players with regard to machinery safety:

- machine manufacturers (small, medium and large enterprises);
- health and safety bodies (regulators, accident prevention organisations, market surveillance etc.)

Others can be affected by the level of machinery safety achieved with the means of the document by the above-mentioned stakeholder groups:

- machine users/employers (small, medium and large enterprises);
- machine users/employees (e.g. trade unions, organizations for people with special needs);
- service providers, e. g. for maintenance (small, medium and large enterprises);
- consumers (in case of machinery intended for use by consumers).

The above-mentioned stakeholder groups have been given the possibility to participate at the drafting process of this document.

The machinery concerned and the extent to which hazards, hazardous situations or hazardous events are covered are indicated in the Scope of this document.

When requirements of this type-C standard are different from those which are stated in type-A or type-B standards, the requirements of this type-C standard take precedence over the requirements of the other standards for machines that have been designed and built according to the requirements of this type-C standard.

This document has been developed in order to align as far as possible its requirements to those of the applicable regional standards in Australia, EU, USA.

<https://standards.iteh.ai/catalog/standards/iso/56165cf6-2d98-446c-ba8b-0d5f0848f5ec/iso-10896-1-2020>

Rough-terrain trucks — Safety requirements and verification —

Part 1: Variable-reach trucks

1 Scope

This document specifies general safety requirements for non-slewing, rough-terrain variable-reach trucks (referred to as trucks), with rigid chassis and equipped with a telescopic lifting means (pivoting boom) on which a load-handling device such as a carriage with fork arms is typically fitted. Fork arms and other integrated attachments are considered to be parts of the truck.

NOTE These trucks are also known as telehandlers, or telescopic handlers.

For the purpose of this document, trucks are designed to transport, lift and place loads and can be driven on unimproved terrain. They can also be equipped with a variety of attachments or interchangeable equipment (e.g. fork arms, bale spikes, mowers, sweepers) which can be both load-carrying and non-load-carrying.

Other standards, in addition to the relevant provisions of this document, can apply to the attachments.

This document is not applicable to the following:

- a) industrial variable-reach trucks covered by ISO 3691-2;
- b) machines designed primarily for earth moving, such as loaders, even if their buckets are replaced by fork arms (see ISO 20474-3);
- c) trucks with articulated chassis;
- d) machines designed primarily with variable-length load suspension elements (e.g. chain, ropes) from which the load can swing freely in all directions (mobile cranes);
- e) trucks fitted with personnel/work platforms, designed to move persons to elevated working positions;
- f) trucks designed primarily for container handling.

The significant hazards covered by this document are listed in [Annex A](#). This document does not address hazards that can occur:

- during manufacture;
- when handling suspended loads, which can swing freely (see ISO 10896-4);
- when using trucks on public roads;
- when operating in potentially explosive atmospheres;
- with a battery, LPG or hybrid as the primary power source.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 2330, *Fork-lift trucks — Fork arms — Technical characteristics and testing*

ISO 2860, *Earth-moving machinery — Minimum access dimensions*

ISO 2867:2011, *Earth-moving machinery — Access systems*

ISO 3449, *Earth-moving machinery — Falling-object protective structures — Laboratory tests and performance requirements*

ISO 3457, *Earth-moving machinery — Guards — Definitions and requirements*

ISO 3471:2008, *Earth-moving machinery — Roll-over protective structures — Laboratory tests and performance requirements*

ISO 3795, *Road vehicles, and tractors and machinery for agriculture and forestry — Determination of burning behaviour of interior materials*

ISO 3864-1, *Graphical symbols — Safety colours and safety signs — Part 1: Design principles for safety signs and safety markings*

ISO 3864-2, *Graphical symbols — Safety colours and safety signs — Part 2: Design principles for product safety labels*

ISO 5053-1, *Industrial trucks — Terminology and classification — Part 1: Types of industrial trucks*

ISO 5353, *Earth-moving machinery, and tractors and machinery for agriculture and forestry — Seat index point*

ISO 6016, *Earth-moving machinery — Methods of measuring the masses of whole machines, their equipment and components*

ISO 6292:2020, *Powered industrial trucks and tractors — Brake performance and component strength*

ISO 6682, *Earth-moving machinery — Zones of comfort and reach for controls*

ISO 6683, *Earth-moving machinery — Seat belts and seat belt anchorages — Performance requirements and tests*

ISO 7000, *Graphical symbols for use on equipment — Registered symbol*

ISO 7096, *Earth-moving machinery — Laboratory evaluation of operator seat vibration*

ISO 9533, *Earth-moving machinery — Machine-mounted audible travel alarms and forward horns — Test methods and performance criteria*

ISO 10263-3, *Earth-moving machinery — Operator enclosure environment — Part 3: Pressurization test method*

ISO 10263-4, *Earth-moving machinery — Operator enclosure environment — Part 4: Heating, ventilating and air conditioning (HVAC) test method and performance*

ISO 10896-6, *Rough-terrain trucks — Safety requirements and verification — Part 6: Tilting operator's cabs*

ISO 10896-7, *Rough-terrain trucks — Safety requirements and verification — Part 7: Longitudinal load moment systems*

ISO 11112, *Earth-moving machinery — Operator's seat — Dimensions and requirements*

ISO 12508, *Earth-moving machinery — Operator station and maintenance areas — Bluntness of edges*

ISO 13284, *Fork-lift trucks — Fork-arm extensions and telescopic fork arms — Technical characteristics and strength requirements*

ISO 13732-1, *Ergonomics of the thermal environment — Methods for the assessment of human responses to contact with surfaces — Part 1: Hot surfaces*

ISO 13766-1, *Earth-moving and building construction machinery — Electromagnetic compatibility (EMC) of machines with internal electrical power supply — Part 1: General EMC requirements under typical electromagnetic environmental conditions*

ISO 13849-1, *Safety of machinery — Safety-related parts of control systems — Part 1: General principles for design*

ISO 13850, *Safety of machinery — Emergency stop function — Principles for design*

ISO 15817, *Earth-moving machinery — Safety requirements for remote operator control systems*

ISO 15818, *Earth-moving machinery — Lifting and tying-down attachment points — Performance requirements*

ISO 18063-1, *Rough-terrain trucks — Visibility test methods and their verification — Part 1: Variable-reach trucks*

ISO 21507, *Earth-moving machinery — Performance requirements for non-metallic fuel tanks*

ISO 22915-10, *Industrial trucks — Verification of stability — Part 10: Additional stability test for trucks operating in the special condition of stacking with load laterally displaced by powered devices*

ISO 22915-14, *Industrial trucks — Verification of stability — Part 14: Rough-terrain variable-reach trucks*

ISO 22915-20, *Industrial trucks — Verification of stability — Part 20: Additional stability test for trucks operating in the special condition of offset load, offset by utilization*

ISO 19014-1, *Earth-moving machinery — Functional safety — Part 1: Methodology to determine safety-related parts of the control system and performance requirements*

ISO 4413:2010, *Hydraulic fluid power — General rules and safety requirements for systems and their components*

ISO 13857, *Safety of machinery — Safety distances to prevent hazard zones being reached by upper and lower limbs*

ISO 12100, *Safety of machinery — General principles for design — Risk assessment and risk reduction*

IEC 60529, *Degrees of protection provided by enclosures (IP Code)*

EN 12053, *Safety of industrial trucks — Test methods for measuring noise emissions*

EN 12895, *Industrial trucks — Electromagnetic compatibility*

ANSI B56.11.5, *Measurement of Sound Emitted by Low Lift, High Lift, and Rough Terrain Powered Industrial Trucks*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 5053-1 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— IEC Electropedia: available at <http://www.electropedia.org>

— ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

rough-terrain truck

truck designed for operation on unimproved natural terrain as well as the disturbed terrain of work sites

3.2

compact truck

truck having a maximum height in normal travel mode not exceeding 2 150 mm, a maximum operating mass according to ISO 6016 not exceeding 6 000 kg, and a maximum width in normal travel mode not exceeding 1 850 mm

3.3

rated capacity

Q_1
<truck> maximum load permitted by the manufacturer at the standard load centre distance that the truck is capable of lifting and transporting on *fork arms* (3.13) in normal conditions with the *boom* (3.14) fully retracted

Note 1 to entry: See [Figure 1](#).

3.4

rated capacity

<attachment> maximum load that the *attachment* (3.17) is permitted by its manufacturer to handle in normal operation under specified conditions

Note 1 to entry: The rated capacity of the *attachment* (3.17) can be associated with the load centre distance. See [Table 1](#).

3.5

actual capacity

maximum load at a specified load centre distance, established by the manufacturer based on component strength and truck stability, that the truck can carry, lift and stack to a specified *lift height* (3.7) and *reach* (3.6), in normal operation

Note 1 to entry: See [Figure 1](#).

Note 2 to entry: The actual capacity depends on the configuration of the truck in respect of variables including lift height, the reach of the *boom* (3.14), the actual load centre, load-handling devices and *stabilizing devices* (3.11).

Note 3 to entry: It defines the load-handling ability of the particular truck as equipped. Different actual capacity with removable *attachments* (3.17), where permitted, may also be established by the appropriate stability test or by calculation verified by empirical data.

3.6

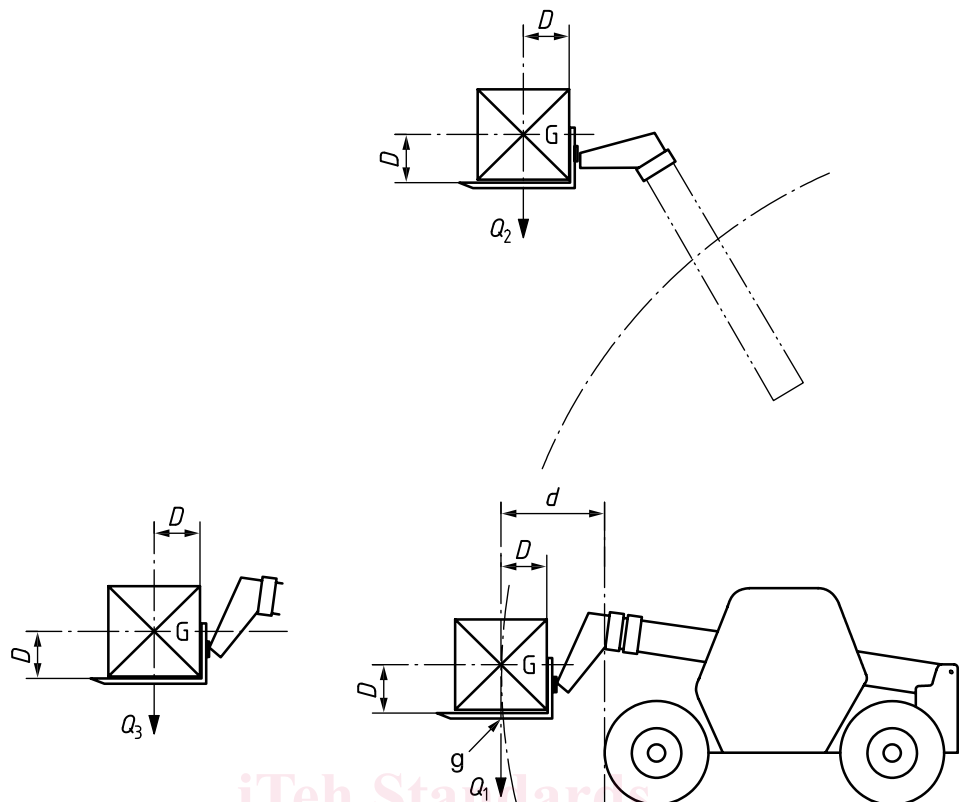
reach

d

distance between two vertical parallel planes, one plane being tangent to the front of the outside diameter of the front tyres or tracks, the other plane being tangent to the curve described by the centre of gravity of the load moving from its highest position to its lowest position

Note 1 to entry: See [Figure 1](#).

Note 2 to entry: In practice, the reach can be measured by referring to a point, g , corresponding to the vertical projection of the centre of gravity, G , of the load onto the plane of the top surface of the *fork arms* (3.13), as shown in [Figure 1](#).

**Key**

- d reach
- D standard load centre distance
- G centre of gravity of the load
- g point corresponding to vertical projection of G
- Q_1 rated capacity
- Q_2 actual capacity at maximum lift height
- Q_3 actual capacity at maximum reach

Figure 1 — Parameters for determining actual capacity of a truck with fork arms

3.7**lift height**

height from the ground to the upper face of the fork arms or underside of the load, whichever is the lower

3.8**standard load centre distance**

D

distance from the centre of gravity of the load, horizontally rearwards to the front of the fork shanks and vertically downwards to the upper faces of the *fork arms* (3.13)

Note 1 to entry: See [Figure 1](#).

Note 2 to entry: [Table 1](#) gives standard load centre distances in relation to their rated capacities.

Table 1 — Standard load centre distances and rated capacities

Rated capacity		Standard load centre distance				
Q_1 kg		D mm				
		400	500	600	900	1 200
0	<1 000	X		X ^a		
≥1 000	<5 000		X ^c	X ^b		
≥5 000	<10 000			X		
≥10 000	<20 000			X	X	X
≥20 000	<25 000				X	X
≥25 000						X

NOTE Trucks can be rated for special applications with load centres related to those applications.

^a 600 mm is typically used in the USA.

^b 600 mm is typically used in Asia, Australia and the USA.

^c 500 mm is typically used in Europe.

3.9 lost load distance

l_L
effective thickness

d_E
horizontal shift in the standard load centre that can occur when removable *attachments* (3.17) are added to a truck

3.10 axle oscillation locking-mechanism

mechanism designed to lock oscillation of an axle to improve truck stability

3.11 stabilizing device

extendable or pivoting mechanical support used to improve the stability of a truck when stationary

3.12 lateral levelling

change in the lateral inclination angle between the chassis and the ground made to ensure that the *boom* (3.14) operates in a vertical plane even when the truck is positioned on a side slope

3.13 fork arms

device comprising two or more solid fork arms, each consisting of a shank (vertical portion) and a blade, which is hook- or shaft-mounted, fitted on the carriage and usually adjusted manually

3.14 boom

pivoting support member that permits horizontal and vertical placement of the load or *attachment* (3.17)

3.15 crab steering mode

steering mode where all wheels of the truck steer in the same direction