



SLOVENSKI STANDARD
oSIST ISO/DIS 14966:2019

01-september-2019

Zunanji zrak - Določevanje numerične koncentracije anorganskih vlaknastih delcev - Metoda štetja z elektronskim mikroskopom

Ambient air - Determination of numerical concentration of inorganic fibrous particles - Scanning electron microscopy method

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Air ambient - Détermination de la concentration en nombre des particules inorganiques fibreuses - Méthode par microscopie électronique à balayage

<https://standards.iteh.ai/catalog/standards/sist/d8778f98-b739-430a-ab37-149662f/sist-14966-2019>

Ta slovenski standard je istoveten z: ISO/DIS 14966:2018

ICS:

13.040.20 Kakovost okoljskega zraka Ambient atmospheres

oSIST ISO/DIS 14966:2019

en,fr,de

DRAFT INTERNATIONAL STANDARD

ISO/DIS 14966

ISO/TC 146/SC 3

Secretariat: ANSI

Voting begins on:
2018-09-18Voting terminates on:
2018-12-11

Ambient air — Determination of numerical concentration of inorganic fibrous particles — Scanning electron microscopy method

Air ambient — Détermination de la concentration en nombre des particules inorganiques fibreuses — Méthode par microscopie électronique à balayage

ICS: 13.040.20

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO 14966:2020](https://standards.iteh.ai/catalog/standards/sist/d8778f98-b739-430a-ab37-428ed009672f/sist-iso-14966-2020)

<https://standards.iteh.ai/catalog/standards/sist/d8778f98-b739-430a-ab37-428ed009672f/sist-iso-14966-2020>

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

This document is circulated as received from the committee secretariat.



Reference number
ISO/DIS 14966:2018(E)

© ISO 2018

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST ISO 14966:2020

<https://standards.iteh.ai/catalog/standards/sist/d8778f98-b739-430a-ab37-428ed009672f/sist-iso-14966-2020>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2018

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	v
Introduction	vi
1 Scope	1
2 Terms and definitions	1
3 Abbreviated terms	4
4 Principle	4
5 Apparatus and materials	5
5.1 Air sampling.....	5
5.1.1 Sampling head.....	5
5.1.2 Sampling train.....	5
5.1.3 Sampling pump.....	5
5.1.4 Needle valve.....	6
5.1.5 Volumetric flowmeter (rotameter).....	6
5.1.6 Timer.....	7
5.1.7 Dry type gas meter (optional).....	7
5.1.8 Meteorological instruments (optional).....	7
5.1.9 Instruments for unattended sampling (optional).....	7
5.2 Preparation of filters.....	8
5.2.1 Vacuum evaporator.....	8
5.2.2 Plasma asher.....	9
5.3 Sample analysis.....	10
5.3.1 Scanning electron microscope (SEM).....	10
5.3.2 Energy-dispersive X-ray system.....	11
5.3.3 Stereo-microscope.....	11
5.3.4 Gold-coated capillary-pore polycarbonate filters.....	11
5.3.5 Backing filters.....	11
5.3.6 Disposable plastic field monitors (optional).....	11
5.3.7 Technically pure oxygen.....	11
5.3.8 Rubber connecting hoses.....	11
5.3.9 Filter containers.....	11
5.3.10 Routine electron microscopy tools and supplies.....	12
5.3.11 Sample for resolution adjustment.....	12
5.3.12 Sample for magnification calibration.....	12
6 Air sample collection and analysis	12
6.1 Measurement planning.....	12
6.2 Collection of air samples.....	12
6.3 SEM specimen preparation.....	14
6.4 Analysis in the scanning electron microscope.....	15
6.4.1 General instructions.....	15
6.4.2 Fibre-counting criteria.....	16
6.4.3 Fibre classification.....	21
6.4.4 Analysis using reference spectra and peak height ratios.....	28
6.4.5 Measurement of fibre dimensions.....	30
6.4.6 Recording of data on the fibre counting form.....	30
7 Calculation of results	30
7.1 Calculation of the mean fibre concentration.....	30
7.2 Calculation of the 95 % confidence interval.....	31
8 Performance characteristics	32
8.1 General.....	32
8.2 Measurement uncertainty.....	32
8.2.1 Systematic errors.....	32

ISO/DIS 14966:2018(E)

8.2.2	Random errors.....	32
8.2.3	Errors due to sampling.....	33
8.2.4	Errors associated with the SEM examination.....	33
8.2.5	Total error of the measurement.....	33
8.2.6	Random errors due to fibre counting.....	34
8.3	Limit of detection.....	36
9	Test report.....	37
Annex A (normative)	Preparation of filters for air sampling.....	39
Annex B (normative)	Procedures for calibration and adjustment of the SEM.....	40
Annex C (informative)	Characteristics and chemical composition of inorganic fibres.....	42
Annex D (informative)	Poisson variability as a function of fibre density on sampling filter and area of filter analysed.....	47
Annex E (informative)	Combination of the results from multiple samples.....	48
Bibliography		49

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 14966:2020

<https://standards.iteh.ai/catalog/standards/sist/d8778f98-b739-430a-ab37-428ed009672f/sist-iso-14966-2020>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 146, *Air quality*, Subcommittee SC 3, *Ambient atmospheres*.

This second edition cancels and replaces the first edition (ISO 14966:2002), which has been technically revised.

The main changes compared to the previous edition are as follows:

— xxx xxxxxxxx xxx xxx

Introduction

This International Standard describes a method for measurement of the numerical concentration of inorganic fibrous particles in ambient air using the scanning electron microscope. This International Standard is based on VDI 3492[6].

The method is also suitable for determining the numerical concentrations of inorganic fibres in the interior atmospheres of buildings, for example measurement of residual airborne fibre concentrations after the removal of asbestos-containing building materials.

Biological research has shown that the fibrogenic or carcinogenic effect of a fibre is related to its length, diameter and its resistance to dissolution in a biological environment. The point at which fibres are too short, too thick or of insufficient durability to produce a fibrogenic or carcinogenic effect is uncertain. Fibres with lengths greater than 10 µm and diameters of a few tenths of 1 µm, which also have durabilities such that they remain unchanged for many years in the body, are regarded as particularly carcinogenic. On the basis of current knowledge, fibres shorter than 5 µm are thought to have a low carcinogenic potential [7 to 10].

For the purposes of this International Standard, a fibre is defined as a particle which has a minimum length to width (aspect) ratio of 3:1. Fibres with lengths greater than 5 µm and widths extending from the lower limit of visibility up to 3 µm are counted. Fibres with diameters less than 3 µm are considered to be respirable. Since the method requires recording the lengths and widths of all fibres, the data can be re-evaluated if it is required to derive concentrations for fibres with a higher minimum aspect ratio[11].

The range of concentration to be measured extends from that found in clean air environments, in which the mean value of a large number of individual measurements of asbestos fibre concentrations has been found to be generally lower than 100 fibres/m³ (fibres longer than 5 µm), up to higher exposure scenarios in which concentrations as much as two orders of magnitude higher have been found[9,11].

This method is used to measure the numerical concentration of inorganic fibres with widths smaller than 3 µm and lengths exceeding 5 µm up to a maximum of 100 µm. Using energy-dispersive X-ray analysis (EDXA), fibres are classified as fibres with compositions consistent with those of asbestos fibres, calcium sulfate fibres and other inorganic fibres.

Calcium sulfate fibres are separated from other inorganic fibres and are not included in the final result, because on the basis of current knowledge, they do not represent any health hazard. Nevertheless, the numerical concentration of calcium sulfate fibres must be determined, since a high concentration of these fibres can negatively bias the results for probable asbestos fibres, and in some circumstances the sample may have to be rejected.[12] In addition, knowledge of the numerical concentration of calcium sulfate fibres is of importance in the interpretation of fibre concentrations in ambient atmospheres.

Detection and identification of fibres becomes progressively more uncertain as the fibre width is reduced below 0,2 µm. Identification of a fibre as a specific species is more confident if the source of emission is known or suspected, such as in a building for which bulk materials are available for analysis.

In order to facilitate the scanning electron microscope examination, organic particles collected on the filter are almost completely removed by a plasma ashing treatment.

Except in situations where fibre identification is difficult, there should be only minor differences between fibre counting results obtained by this method and those obtained using the procedures for determination of PCM-equivalent fibres in [annex E](#) of the transmission electron microscopy method ISO 10312.

Ambient air — Determination of numerical concentration of inorganic fibrous particles — Scanning electron microscopy method

1 Scope

This International Standard specifies a method using scanning electron microscopy for determination of the concentration of inorganic fibrous particles in the air. The method specifies the use of gold-coated, capillary-pore, track-etched membrane filters, through which a known volume of air has been drawn. Using energy-dispersive X-ray analysis, the method can discriminate between fibres with compositions consistent with those of the asbestos varieties (e.g. serpentine and amphibole), gypsum, and other inorganic fibres. [Annex C](#) provides a summary of fibre types which can be measured.

This International Standard is applicable to the measurement of the concentrations of inorganic fibrous particles in ambient air. The method is also applicable for determining the numerical concentrations of inorganic fibrous particles in the interior atmospheres of buildings, for example to determine the concentration of airborne inorganic fibrous particles remaining after the removal of asbestos-containing products.

The range of concentrations for fibres with lengths greater than 5 µm, in the range of widths which can be detected under standard measurement conditions (see [6.2](#)), is approximately 3 fibres to 200 fibres per square millimetre of filter area. The air concentrations, in fibres per cubic metre, represented by these values are a function of the volume of air sampled.

NOTE The ability of the method to detect and classify fibres with widths lower than 0,2 µm is limited. If airborne fibres in the atmosphere being sampled are predominantly < 0,2 µm in width, a transmission electron microscopy method such as ISO 10312 can be used to determine the smaller fibres.

2 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

2.1

acicular

shape shown by an extremely slender crystal with cross-sectional dimensions which are small relative to its length, i.e. needle-like

2.2

amphibole

any of a group of rock-forming double-chain silicate minerals, closely related in crystal form and composition, and having the nominal formula:



where

A = K, Na;

B = Fe²⁺, Mn, Mg, Ca, Na;

C = Al, Cr, Ti, Fe³⁺, Mg, Fe²⁺;

T = Si, Al, Cr, Fe³⁺, Ti.

ISO/DIS 14966:2018(E)

Note 1 to entry: See references[19] and[20].

Note 2 to entry: In some varieties of amphibole, these elements can be partially substituted by Li, Pb, or Zn. Amphibole is characterized by a cross-linked double chain of Si-O tetrahedra with a silicon : oxygen ratio of 4 : 11, by columnar or fibrous prismatic crystals and by good prismatic cleavage in two directions parallel to the crystal faces and intersecting at angles of about 56° and 124°.

2.3**amphibole asbestos**

amphibole in an asbestiform habit

2.4**analytical sensitivity**

calculated airborne fibre concentration equivalent to counting one fibre in the analysis

Note 1 to entry: The analytical sensitivity is expressed in fibres per cubic metre.

Note 2 to entry: This method does not specify a unique analytical sensitivity. The analytical sensitivity is determined by the needs of the measurement and the conditions found on the prepared sample.

2.5**asbestiform**

specific type of mineral fibrosity in which the fibres and fibrils possess high tensile strength and flexibility

2.6**asbestos**

any of a group of silicate minerals belonging to the serpentine and amphibole groups which have crystallized in the asbestiform habit, causing them to be easily separated into long, thin, flexible, strong fibres when crushed or processed

Note 1 to entry: The Chemical Abstracts Service Registry Numbers of the most common asbestos varieties are: chrysotile (12001-29-5), crocidolite (12001-28-4), grunerite asbestos (amosite) (12172-73-5), anthophyllite asbestos (77536-67-5), tremolite asbestos (77536-68-6) and actinolite asbestos (77536-66-4).

2.7**asbestos structure**

individual asbestos fibre, or any connected or overlapping grouping of asbestos fibres or bundles, with or without other particles

2.8**aspect ratio**

ratio of length of a particle to its width

2.9**blank**

fibre count made on a specimen prepared from an unused filter, to determine the background measurement

2.10**chrysotile**

fibrous variety of the mineral serpentine, which has the nominal composition:



Note 1 to entry: Most natural chrysotile deviates little from this nominal composition. In some varieties of chrysotile, minor substitution of silicon by Al^{3+} may occur. Minor substitution of magnesium by Al^{3+} , Fe^{2+} , Fe^{3+} , Ni^{2+} , Mn^{2+} and Co^{2+} may also be present. Chrysotile is the most prevalent type of asbestos.

2.11**cleavage**

breaking of a mineral along one of its crystallographic directions

2.12**cleavage fragment**

fragment of a crystal that is bounded by cleavage faces

2.13**cluster**

fibrous structure in which two or more fibres, or fibre bundles, are randomly oriented in a connected grouping

2.14**countable fibre**

any object longer than 5 μm , having a maximum width less than 3 μm and a minimum aspect ratio of 3 : 1

2.15**energy-dispersive X-ray analysis**

measurement of the energies and intensities of X-rays by use of a solid-state detector and multi-channel analyser system

2.16**field blank**

filter cassette which has been taken to the sampling site, opened and then closed, and subsequently used to determine the background fibre count for the measurement

2.17**fibre**

elongated particle which has parallel or stepped sides and a minimum aspect ratio of 3 : 1

2.18**fibre bundle**

structure composed of apparently attached, parallel fibres

Note 1 to entry: A fibre bundle may exhibit diverging fibres at one or both ends. The length is defined as equal to the maximum length of the structure, and the diameter is defined as equal to the maximum width in the compact region.

2.19**fibril**

single fibre of asbestos which cannot be further separated longitudinally into smaller components without losing its fibrous properties or appearances

2.20**fibrous structure**

fibre, or connected grouping of fibres, with or without other particles

2.21**habit**

the characteristic crystal growth form or combination of these forms of a mineral, including characteristic irregularities

2.22**image field**

the area on the filter sample which is shown on the screen

2.23**limit of detection**

calculated airborne fibre concentration equivalent to the upper 95 % confidence limit of 2,99 fibres predicted by the Poisson distribution for a count of zero fibres

Note 1 to entry: The limit of detection is expressed in fibres per cubic metre.

ISO/DIS 14966:2018(E)**2.24****magnification**

ratio of the size of the image of an object on the cathode ray tube screen to the actual size of the object

Note 1 to entry: For the purposes of this International Standard, magnification values always refer to that applicable to the observation screen.

2.25**matrix**

structure in which one or more fibres or fibre bundles touch, are attached to, or partially concealed by a single particle or connected group of non-fibrous particle

2.26**serpentine**

any of a group of common rock-forming minerals having the nominal formula:

**2.27****split fibre**

agglomeration of fibres which, at one or several points along its length, appears to be compact and undivided, whilst at other points appears to separate into separate fibres

2.28**structure**

single fibre, fibre bundle, cluster or matrix

3 Abbreviated terms

CRT	Observation screen
EDXA	Energy-dispersive X-ray analysis
FWHM	Full width, half maximum
PTFE	Polytetrafluoroethylene
SEM	Scanning electron microscope
UICC	Union Internationale Contre le Cancer

4 Principle

A sample of airborne particulate is collected by drawing a measured volume of air through a gold-coated, capillary pore track-etched membrane filter with a maximum nominal pore size of 0,8 µm, which is subsequently examined in the scanning electron microscope (SEM). Before analysis, the gold-coated filter is treated in a plasma asher to remove organic particles, to the extent that this is possible. The individual fibrous particles and constituent fibres in a randomly-selected area of the filter are then counted at a magnification of approximately 2 000 ×. If a fibre is detected at the magnification of approximately 2 000 ×, it is examined at a higher magnification of approximately 10 000 × to measure its dimensions. At the higher magnification of approximately 10 000 ×, energy-dispersive X-ray analysis (EDXA) is used to classify the fibre according to the chemical composition.

The limit of detection for this method is defined as the numerical fibre concentration below which, with 95 % confidence, the actual concentration lies when no fibres are found during the SEM examination. The limit of detection theoretically can be lowered indefinitely by filtration of progressively larger volumes of air and by examination of a larger area of the specimen in the SEM. In practice, the lowest

achievable limit of detection for a particular area of SEM specimen examined is controlled by the total suspended particulate concentration remaining after the plasma ashing step.

A limit of detection of approximately 300 fibres/m³ is obtained if an air volume of 1 m³ per square centimetre of filter surface area passes through the filter, and an area of 1 mm² of the filter area is examined in the SEM. This corresponds to an evaluated sample air volume of 0,01 m³.

5 Apparatus and materials

5.1 Air sampling

5.1.1 Sampling head

A disposable, 3-piece, conductive plastic field monitor cassette may be used as the sampling head, provided that the design is such that significant leakage around the filter does not occur. A re-usable unit may also be used as the sampling head, consisting of a cylindrical cowl and a filter holder with backing filter. [Figure 1](#) shows an example of a suitable sampling head. The cowl and the filter holder should be made from a corrosion-resistant material. The filter must be clamped in such a manner that significant leaks around the filter do not occur at differential pressures up to approximately 50 kPa (see [B.4](#)). The length of the cowl should be 0,5 to 2,5 times the effective filter diameter (the diameter of the exposed circular filter area through which the air is drawn). If it is possible that wind velocities greater than 5 m/s could occur during sampling, use a long cowl with a ratio of length to effective diameter of 2,5.


5.1.2 Sampling train

[Figure 2](#) shows an example of a suitable sampling train. Control of the volumetric flowrate may be achieved either by the use of a throttle valve (3) or a volumetric flow controller (8) in conjunction with a regulator valve (4).

5.1.3 Sampling pump

Pulse-free or pulsation-damped, capable of maintaining, at a pressure differential across the filter of at least 50 kPa, a volumetric flow of between 8 l/min and 30 l/min, depending on the diameter of filter used.

In order to achieve the required analytical sensitivity, a flowrate of 8 l/min is required if a 25 mm diameter filter is used. This flowrate is equivalent to a filter face velocity of approximately 35 cm/s. The sampling pump shall be capable of maintaining the intended flowrate within $\pm 10\%$ throughout the whole sampling period.

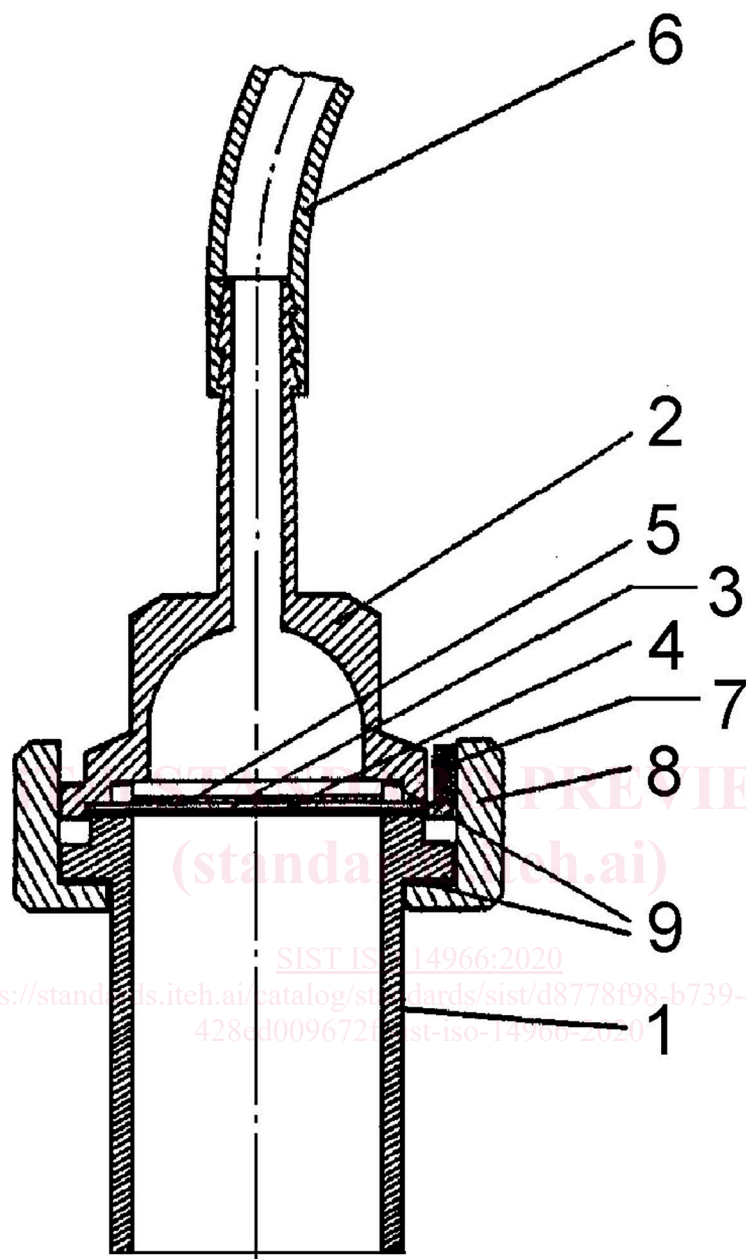

Key

- | | | | |
|---|------------------------------|---|-----------------|
| 1 | Cowl | 6 | Suction hose |
| 2 | Filter holder | 7 | Clamping roller |
| 3 | Backing filter | 8 | Clamping ring |
| 4 | Track-etched membrane filter | 9 | PTFE gaskets |
| 5 | Supporting mesh | | |

Figure 1 — Example of design of sampling head

5.1.4 Needle valve

With a fine adjustment mechanism, for setting the volumetric flowrate.

5.1.5 Volumetric flowmeter (rotameter)

For measuring the volumetric flowrate.

5.1.6 Timer

For measuring the sampling time.

5.1.7 Dry type gas meter (optional)

For volumetric measurement, calibrated, designed for a maximum volumetric flowrate of 2 m³/h.

5.1.8 Meteorological instruments (optional)

For recording of meteorological conditions during sampling. Instruments such as a thermometer, a hygrometer, a barometer and a wind speed and direction recorder will be required.

5.1.9 Instruments for unattended sampling (optional)

For unattended sampling, a volumetric flow controller is required for regulation of the flowrate to within ± 10 % of the nominal rate, with an automatic switch to turn off the sampling pump if the flowrate exceeds or falls below the pre-set tolerance band. The flow controller can be integrated into the suction unit.

A programmable switch is required for pre-setting the air sampling cycle. A pressure gauge which incorporates a switching contact is required to switch off the sampling pump if the pressure differential across the sampling filter increases to a pre-set value.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO 14966:2020](https://standards.iteh.ai/catalog/standards/sist/d8778f98-b739-430a-ab37-428ed009672f/sist-iso-14966-2020)

<https://standards.iteh.ai/catalog/standards/sist/d8778f98-b739-430a-ab37-428ed009672f/sist-iso-14966-2020>