
**Ships and marine technology —
Guidelines for the design and
manufacture of the hub cap with fins
for a fixed-pitch marine propeller**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 23453:2022

<https://standards.iteh.ai/catalog/standards/sist/cf8c1879-a6fa-4995-824b-7d43a122ab06/iso-23453-2022>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 23453:2022

<https://standards.iteh.ai/catalog/standards/sist/cf8c1879-a6fa-4995-824b-7d43a122ab06/iso-23453-2022>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2022

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Guidelines for HCWF design and manufacture.....	2
4.1 Hydrodynamic performance and energy-saving effect evaluation.....	2
4.2 Manufacture.....	2
4.3 Tightness test.....	3
4.4 Accessibility.....	3
5 Hydrodynamic design procedure of HCWF.....	3
5.1 Applicability analysis.....	3
5.2 Preliminary principle dimensions and main parameters.....	3
5.3 Pitch and camber distribution.....	3
5.4 Verification with open water testing.....	3
5.5 Verification using full-scale tests.....	5
6 Strength check of HCWF.....	5
6.1 Strength check method of HCWF.....	5
6.2 Strength check method of connecting bolts between HCWF and propeller.....	6
Bibliography.....	7

(standards.iteh.ai)

ISO 23453:2022

<https://standards.iteh.ai/catalog/standards/sist/cf8c1879-a6fa-4995-824b-7d43a122ab06/iso-23453-2022>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 8, *Ships and marine technology*, Subcommittee SC 8, *Ship design*.

ISO 23453:2022

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

A hub cap with fins is an energy-saving device installed behind a propeller instead of a propeller hub cap. It rotates together with the propeller to increase the propulsion efficiency of the ship by decreasing the energy losses caused by hub vortex. To save energy and reduce underwater noise, propeller hub caps with fins are installed on a wide variety of ships.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 23453:2022

<https://standards.iteh.ai/catalog/standards/sist/cf8c1879-a6fa-4995-824b-7d43a122ab06/iso-23453-2022>

Ships and marine technology — Guidelines for the design and manufacture of the hub cap with fins for a fixed-pitch marine propeller

1 Scope

This document provides general guidelines for design and manufacture of a hub vortex energy-saving device for a fixed-pitch marine propeller. This document can also apply to the design and manufacture of hub vortex energy-saving device for other types of marine propellers.

According to the specific geometrical shape of the propeller and other specifications, it is suggested that hub cap with fins is used in merchant ships.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

hub cap with fins

HCWF

device mounted behind a propeller that replaces the propeller hub cap which rotates with the propeller

Note 1 to entry: The device saves energy by reducing the energy losses of propeller hub vortices. [Figure 1](#) shows the sketch of a propeller and a HCWF geometry.

3.2

axial distance between propeller disc and hub cap with fins

L

axial distance from propeller disc to *hub cap with fins (HCWF)* ([3.1](#)) disc

Note 1 to entry: [Figure 1](#) illustrates the axial distance between propeller and HCWF.


3.3

circumferential phase angle

ψ

angle between propeller generator line and hub cap with fins generator line

Note 1 to entry: [Figure 1](#) shows the circumferential phase angle.

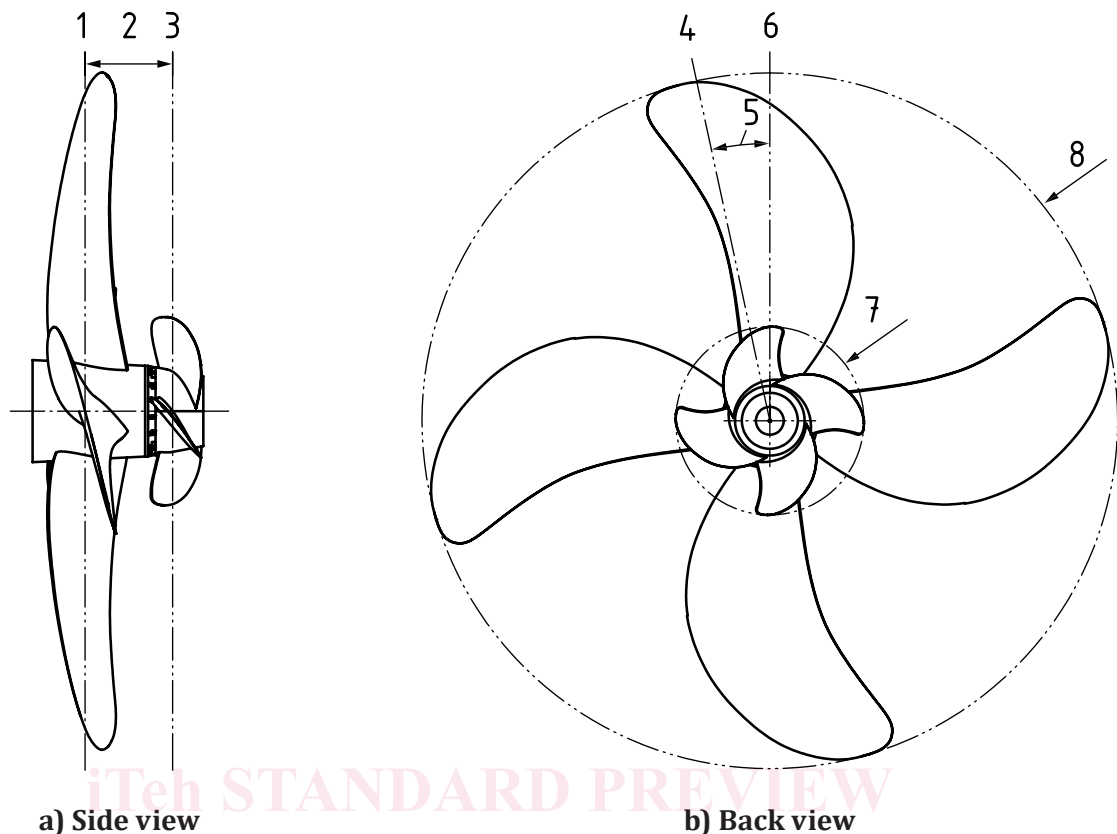

Key

- 1 propeller disc
- 2 axial distance between propeller disc and HCWF disc, *L*_{453:2022}
- 3 HCWF disc standards.iteh.ai/catalog/standards/sist/cf8c1879-a6fa-4995-824b-7d43a122ab06/iso-23453-2022
- 4 generator line of HCWF fin
- 5 circumferential phase angle, ψ
- 6 generator line of propeller blade
- 7 diameter of HCWF, D_F
- 8 diameter of propeller, D

Figure 1 — Sketch of a propeller and a HCWF geometry

4 Guidelines for HCWF design and manufacture

4.1 Hydrodynamic performance and energy-saving effect evaluation

The hydrodynamic performance of a propeller with HCWF and its energy-saving effect should be evaluated by Computational Fluid Dynamics (CFD) methods or model tests. In the case where CFD is used, verification such as comparisons of model tests, full scale trials and monitoring, and other methods are essential.

4.2 Manufacture

4.2.1 The HCWF material should be the same as the propeller material and should comply with the relevant requirements of IACS UR W24^[1].

4.2.2 It is recommended that the surface finish and dimensional tolerance conform to the relevant requirements of ISO 484-1^[2] or ISO 484-2^[3] as appropriate.

4.3 Tightness test

The inner chamber of the HCWF should be tested under hydrostatic or air pressure greater than 0,2 MPa for more than 30 min. During the test, the pressure should be maintained at more than 90 % of the given pressure and no leakage should occur from the chamber to ensure the tightness of HCWF during service life.

4.4 Accessibility

The HCWF should be easily accessible for installation and maintenance.

5 Hydrodynamic design procedure of HCWF

5.1 Applicability analysis

HCWF is suitable for the fixed pitch propeller, especially for the propeller with a high loading at root. If the load on the propeller root is small, the energy-saving effect of installed HCWF is also small. Applicability analysis is determined by the designer's experience.

5.2 Preliminary principle dimensions and main parameters

The following two parts of parameters should be selected at the beginning of design according to the experience of the designer:

- a) the parameters about relative position relations between HCWF and propeller including axial distance and circumferential phase angle;
- b) the geometry parameters of HCWF including diameter, number of fins, chord length of fins, thickness of fins, rake distribution and skew distribution.

5.3 Pitch and camber distribution

Pitch and camber distribution are two important geometric parameters that affect the energy-saving effect of HCWF. Pitch and camber distribution of HCWF are designed according to potential flow theory coupling with viscous flow theory, CFD or other adequate methods.

5.4 Verification with open water testing

The total propulsive efficiency of a vessel can be expressed by [Formula \(1\)](#):

$$\eta_d = \eta_0 \cdot \eta_h \cdot \eta_r = \eta_0 \cdot \frac{1-t}{1-w} \cdot \eta_r \quad (1)$$

where

η_0 is the open water efficiency of the propeller;


η_h is the hull efficiency, $\eta_h = \frac{1-t}{1-w}$;

t is the thrust deduction;

w is the wake fraction;

η_r is the relative rotational efficiency.

HCWF is generally considered to improve the efficiency of the propeller. Therefore, this energy-saving effect can be verified by model test or numerical calculation method. In the case of model test, the energy-saving effect can be verified by using the reverse propeller open-water test method as shown in [Figure 2](#), or other methods.

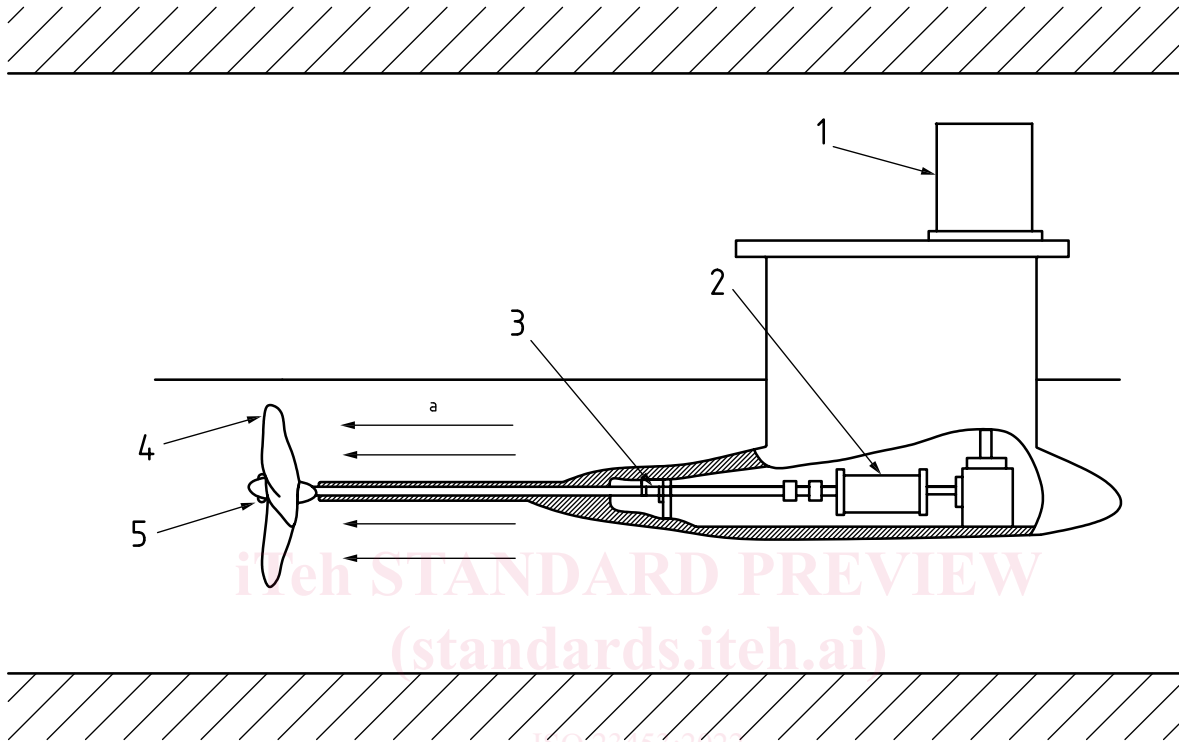

- Key**
- 1 motor
 - 2 torque sensor
 - 3 thrust sensor
 - 4 propeller
 - 5 HCWF
 - a Flow direction.

Figure 2 — Reverse propeller open-water test set up (Reverse POT)

Model tests can be carried out in a cavitation tunnel, circulating water channel and towing tank. The test should be performed on a propeller with HCWF and a propeller with a conventional cap, respectively.

In order to compare the performance of the propeller hydrodynamic when HCWF is installed and when HCWF is not installed, three parameters are defined as shown in [Formula \(2\)](#), [Formula \(3\)](#) and [Formula \(4\)](#).

$$K_{t,\delta} = \frac{K_{t,HCWF_R}}{K_{t,0_R}} \tag{2}$$

$$K_{q,\delta} = \frac{K_{q,HCWF_R}}{K_{q,0_R}} \tag{3}$$