
Natural gas — Energy determination

Gaz naturel — Détermination de l'énergie

iTeh Standards
(<https://standards.itih.ai>)
Document Preview

[ISO 15112:2018](https://standards.itih.ai/catalog/standards/iso/5d2d7042-c9cf-44cc-9a06-9781d17c5b87/iso-15112-2018)

<https://standards.itih.ai/catalog/standards/iso/5d2d7042-c9cf-44cc-9a06-9781d17c5b87/iso-15112-2018>



iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ISO 15112:2018](https://standards.iteh.ai/catalog/standards/iso/5d2d7042-c9cf-44cc-9a06-9781d17c5b87/iso-15112-2018)

<https://standards.iteh.ai/catalog/standards/iso/5d2d7042-c9cf-44cc-9a06-9781d17c5b87/iso-15112-2018>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2018

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	v
Introduction	vi
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Symbols and units	6
5 General Principles	7
6 Gas measurement	8
6.1 General.....	8
6.2 Volume measurement.....	9
6.3 Calorific value measurement.....	9
6.3.1 Measurement techniques and sampling.....	9
6.3.2 Direct measurement — Calorimetry.....	10
6.3.3 Inferential measurement.....	10
6.3.4 Correlation techniques.....	10
6.3.5 Pressure and temperature.....	10
6.3.6 Gas quality tracking.....	10
6.4 Volume conversion.....	10
6.4.1 General.....	10
6.4.2 Density.....	11
6.4.3 Compression factor.....	11
6.5 Calibration.....	11
6.6 Data storage and transmission.....	11
7 Energy determination	12
7.1 Interfaces.....	12
7.2 Methods of energy determination.....	14
7.2.1 Direct determination of energy.....	14
7.2.2 Indirect determination of energy.....	14
8 Strategy and procedures	16
8.1 General.....	16
8.2 Strategies for energy determination.....	17
8.2.1 Strategies for single interfaces.....	18
8.3 Plausibility checks.....	22
9 Assignment methods	23
9.1 Fixed assignment.....	23
9.1.1 Fixed assignment of a measured calorific value.....	23
9.1.2 Fixed assignment of a declared calorific value.....	24
9.2 Variable assignment.....	25
9.2.1 Input at two or more different stations with zero floating point.....	25
9.2.2 Input at two or more different stations with comingled gas flows.....	26
9.3 Determination of the representative calorific value.....	27
9.3.1 Arithmetically averaged calorific value.....	27
9.3.2 Quantity-weighted average calorific value.....	27
9.3.3 Gas quality tracking.....	27
10 Calculation of energy quantities	30
10.1 General formulae for energy.....	30
10.2 Calculation of averaged values — Calculation from average calorific values and cumulative volumes.....	31
10.2.1 Arithmetic average of the calorific value.....	31
10.2.2 Quantity-weighted average of the calorific value.....	32

ISO 15112:2018(E)

10.3	Volume and volume-to-mass conversions.....	32
10.4	Energy determination on the basis of declared calorific values	32
11	Accuracy on calculated energy.....	32
11.1	Accuracy.....	32
11.2	Calculation of uncertainty.....	33
11.3	Bias.....	34
12	Quality control and quality assurance.....	35
12.1	General.....	35
12.2	Check of the course of the measuring data.....	35
12.3	Traceability	36
12.4	Substitute values	36
Annex A	(informative) Main instruments and energy-determination techniques.....	38
Annex B	(informative) Different possible patterns in the change of the calorific value.....	42
Annex C	(informative) Volume conversion and volume-to-mass conversion.....	45
Annex D	(informative) Incremental energy determination	46
Annex E	(informative) Practical examples for volume conversion and energy quantity calculation.....	48
Annex F	(informative) Practical examples for averaging the calorific value due to different delivery situations.....	52
Annex G	(informative) Ways of determining substitute values.....	57
Annex H	(informative) Plausibility check graphical example.....	59
Annex I	(informative) Uncorrected data, bias correction and final result graphical example.....	60
Annex J	(informative) Single-reservoir calorific value determination.....	62
Annex K	(informative)	64
Bibliography	70

[ISO 15112:2018](https://standards.iteh.ai/catalog/standards/iso/5d2d7042-c9cf-44cc-9a06-9781d17c5b87/iso-15112-2018)

<https://standards.iteh.ai/catalog/standards/iso/5d2d7042-c9cf-44cc-9a06-9781d17c5b87/iso-15112-2018>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 193, *Natural gas*.

This third edition cancels and replaces the second edition (ISO 15112:2011), which has been technically revised.

The main changes compared to the previous edition are as follows:

- [Figures 7](#) and [8](#) have been redrafted;
- [Clause 9](#) has been updated;
- [Annex K](#) has been added.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

Since the early 1800s, it has been general practice for manufactured gas and, subsequently, natural gas to be bought and sold on a volumetric basis. Much time and effort has therefore been devoted to developing the means of flow measurement.

Because of the increasing value of energy and variations in gas quality, billing on the basis of thermal energy has now become essential between contracting partners and the need to determine calorific value by measurement or calculation has led to a number of techniques. However, the manner in which calorific value data are applied to flow volume data to produce the energy content of a given volume of natural gas has been far from a standardized procedure.

Energy determination is frequently a necessary factor wherever and whenever natural gas is metered, from production and processing operations through to end-user consumption. This document has been developed to cover aspects related to production/transmission and distribution/end user. It provides guidance to users of how energy units for billing purposes are derived, based on either measurement or calculation or both, to increase confidence in results for contracting partners.

Other standards relating to natural gas, flow measurement, calorific value measurement, calculation procedures and data handling with regard to gas production, transmission and distribution involving purchase, sales or commodity transfer of natural gas can be relevant to this document.

This document contains eleven informative annexes.

iTeh Standards
(<https://standards.itih.ai>)
Document Preview

[ISO 15112:2018](https://standards.itih.ai/catalog/standards/iso/5d2d7042-c9cf-44cc-9a06-9781d17c5b87/iso-15112-2018)

<https://standards.itih.ai/catalog/standards/iso/5d2d7042-c9cf-44cc-9a06-9781d17c5b87/iso-15112-2018>

Natural gas — Energy determination

1 Scope

This document provides the means for energy determination of natural gas by measurement or by calculation, and describes the related techniques and measures that are necessary to take. The calculation of thermal energy is based on the separate measurement of the quantity, either by mass or by volume, of gas transferred and its measured or calculated calorific value. The general means of calculating uncertainties are also given.

Only systems currently in use are described.

NOTE Use of such systems in commercial or official trade can require the approval of national authorization agencies, and compliance with legal regulations is required.

This document applies to any gas-measuring station from domestic to very large high-pressure transmission.

New techniques are not excluded, provided their proven performance is equivalent to, or better than, that of those techniques referred to in this document.

Gas-measuring systems are not the subject of this document.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 6976, *Natural gas — Calculation of calorific values, density, relative density and Wobbe index from composition*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

accuracy of measurement

closeness of the agreement between the result of a measurement and a true value of the measurand

[SOURCE: ISO/Guide 98-3:2008, definition B.2.14]

3.2

adjustment

<of a measuring instrument> of bringing a measuring instrument into a state of performance suitable for its use

Note 1 to entry: Adjustment may be automatic, semi-automatic or manual.

3.3

assignment method

<energy determination> method to derive a calorific value to be applied to the gas passing specified interfaces having only volume measurements

3.4

availability

probability, at any time, that the measuring system, or a measuring instrument forming part of the measuring system, is functioning according to specifications

[SOURCE: EN 1776:1998]

3.5

bias

systematic difference between the true energy and the actual energy determined of the gas passing a gas-measuring station

3.6

calibration

set of operations that establish, under specified conditions, the relationship between values of quantities indicated by a measuring instrument or measuring system, or values represented by a material measure or a reference material, and the corresponding values obtained using working standards

[SOURCE: ISO 14532:2014, definition 2.5.1.1, modified — Definition has been slightly changed and Notes to entry have been removed.]

3.7

superior calorific value

energy released as heat by the complete combustion in air of a specified quantity of gas, in such a way that the pressure, p_1 , at which the reaction takes place remains constant, and all the products of combustion are returned to the same specified temperature, T_1 , as that of the reactants, all of these products being in the gaseous state except for water formed by combustion, which is condensed to the liquid state at T_1

[SOURCE: ISO 14532:2014, definition 2.6.4.1, modified — Definition has been slightly reworded and Notes to entry have been removed.]

3.8

inferior calorific value

energy released as heat by the complete combustion in air of a specified quantity of gas, in such a way that the pressure, p_1 , at which the reaction takes place remains constant, and all the products of combustion are returned to the same specified temperature, T_1 , as that of the reactants, all of these products being in the gaseous state

[SOURCE: ISO 14532:2014, definition 2.6.4.2, modified — Definition has been slightly reworded and Notes to entry have been removed.]

3.9

calorific value station

installation comprising the equipment necessary for the determination of the calorific value of the natural gas in the pipeline

3.10

adjusted calorific value

calorific value measured at a measuring station compensated for the time taken for the gas to travel to the respective volume-measuring station

3.11

corrected calorific value

result of correcting a measurement to compensate for systematic error

3.12**declared calorific value**

calorific value that is notified in advance of its application to interfaces for the purpose of energy determination

3.13**representative calorific value**

calorific value which is accepted to sufficiently approximate the actual calorific value at an interface

3.14**charging area**

set of interfaces where the same method of energy determination is used

3.15**conversion**

determination of the volume under reference conditions from the volume under operating conditions

3.16**correction**

value added algebraically to the uncorrected result of a measurement to compensate for systematic error

Note 1 to entry: The correction is equal to the negative of the estimated systematic error.

Note 2 to entry: Since the systematic error cannot be known perfectly, the correction cannot be complete, see [Annex I](#).

3.17**correction factor**

numerical factor by which the uncorrected result of a measurement is multiplied to compensate for a systematic-error object

Note 1 to entry: Since the systematic error cannot be known perfectly, the correction cannot be complete, see [Annex I](#).

3.18**determination**

set of operations that are carried out on an object in order to provide qualitative or quantitative information about this object

Note 1 to entry: In this document, the term “determination” is only used quantitatively.

3.19**direct measurement**

measurement of a property from quantities which, in principle, define the property

Note 1 to entry: For example, the determination of the calorific value of a gas using the thermoelectric measurement of the energy released in the form of heat during the combustion of a known amount of gas.

[SOURCE: ISO 14532:2014, definition 2.2.1.2, modified — The word “that” has been replaced by “which” in the definition.]

3.20**energy**

product of gas quantity (mass or volume) and calorific value under given conditions

Note 1 to entry: The energy may be called energy amount.

Note 2 to entry: Energy is usually expressed in units of megajoules.

3.21

energy determination

quantitative determination of the amount of energy of a quantity of gas based either on measurement or calculation using measured values

3.22

energy flow rate

energy of gas passing through a cross-section divided by time

Note 1 to entry: Energy flow rate is usually expressed in units of megajoules per second.

3.23

fixed assignment

application without modification of the calorific value measured at one specific calorific-value-measuring station, or the calorific value declared in advance, to the gas passing one, or more, interfaces

3.24

gas transporter

company that conveys gas from one place to another through pipelines

3.25

gas quality tracking

determination of gas quality properties (e. g. the calorific value) at the exit points of a gas grid based on flow calculation; the calculation requires topology data, gas quality data at entry points, volume data at entry and exit points and grid pressures as input information

3.26

interface

place on a pipe used for the transportation or supply of gas at which there is a change of ownership or physical custody of gas

Note 1 to entry: Generally, an interface has an associated measuring station.

3.27

local distribution company

company that delivers gas to industrial, commercial and/or residential customers

3.28

measuring station

installation comprising all the equipment, including the inlet and outlet pipework as far as the isolating valves and structure within which the equipment is housed, used for gas measurement in custody transfer

[SOURCE: EN 1776:1998]

3.29

measuring system

complete set of measuring instruments and auxiliary equipment assembled to carry out specified measurements

[SOURCE: ISO/IEC Guide 99:2007, definition 3.2, modified — Definition has been slightly reworded.]

3.30

measuring instrument

device intended to be used for making measurements, alone or in conjunction with one or more supplementary devices

[SOURCE: ISO/IEC Guide 99:2007, definition 3.1, modified — Definition has been slightly reworded.]

3.31**plausibility**

property of a value to be within reasonable limits

3.32**producer**

company that extracts raw natural gas from reservoirs which, after processing and (fiscal) measurement, is supplied as dry natural gas to the transportation system

3.33**regional distributor**

company that conveys gas to local distribution companies and/or industrial, commercial or residential customers

3.34**residential customer**

person whose occupied premises are supplied with gas, wholly or in part, such gas not being used for any business purpose, commercial or industrial

3.35**systematic error**

mean that would result from an infinitive number of measurements of the same measurand carried out under repeatability conditions minus a true value of the measurand

3.36**traceability**

property of the result of a measurement or the value of a standard whereby it can be related to stated references, usually national or International Standards, through an unbroken chain of comparisons all having stated uncertainties

Note 1 to entry: This chain of comparisons is called a traceability chain.

3.37**uncertainty**

parameter, associated with the result of a measurement, that characterizes the dispersion of the values that could reasonably be attributed to the measurand

3.38**variable assignment**

application of a calorific value for an assignment procedure based on measurement(s) at calorific value station(s) to the gas passing one, or more, interfaces

Note 1 to entry: That applied calorific value may take into account the time taken for the gas to travel from the calorific value station to the respective volume-measuring stations and other factors, to derive an average calorific value for a network, a state reconstruction of the variation of calorific values through a network, etc.

3.39**zero floating point**

position in a grid conveying gas where there is a boundary with different gas qualities on either side

3.40**non-plausible data**

measurement data that are obviously wrong taking into account the measurement situation at a measuring station and the gas flow situation

3.41**grid node**

connection of two or more pipes in a gas grid, grid nodes typically exist at interfaces (entry/exit) or at points where the pipe geometry changes

**3.42
standard load profile
SLP**

standard load profile (SLP) is a model to predict the expected hourly or daily energy consumption of customers where the reading is taken only periodically (e.g. once per year)

4 Symbols and units

Symbol	Meaning	SI unit	Customer unit
<i>E</i>	energy	MJ	kWh
<i>e</i>	energy flow rate	MJ/s	kWh/h
<i>H</i>	calorific value	MJ/m ³ ; MJ/kg	kWh/m ³

NOTE 1 Where the calorific value is in megajoules per cubic metre and the gas volume is in cubic metres, or where the calorific value is in megajoules per kilogram and the gas mass is in kilograms, then the calculated energy is in megajoules.

Where the calorific value is in kilowatt-hours per cubic metre and the gas volume is in cubic metres, or where the calorific value is in kilowatt-hours per kilogram and the gas mass is in kilograms, then the calculated energy is in kilowatt-hours.

To convert the number of megajoules to the number of kilowatt-hours, divide the number by 3,6.

<i>M</i>	mass	kg	t
<i>p</i>	pressure (absolute)	Pa, kPa	bar, mbar
<i>Q</i>	quantity of gas	m ³ , kg	ft ³

NOTE 2 When the quantity is given in cubic metres, it is necessary that it should be qualified by temperature and pressure.

<i>sq_v</i>	volume flow rate	m ³ /h, m ³ /s	
<i>q_m</i>	mass flow rate	kg/s, kg/h	
<i>T</i>	temperature (absolute)	K	
<i>t</i>	time	s, h, d	s, h, d
<i>V</i>	volume (gas)	m ³	
<i>Z</i>	compression factor		
<i>ρ</i>	density	kg/m ³	
<i>θ</i>	temperature	°C	°F

Subscripts

<i>i</i>	inferior calorific value
<i>j</i>	number of time intervals

- n normal reference conditions (273,15 K; 101,325 kPa)
- r ISO-recommended standard reference conditions (288,15 K; 101,325 kPa)
- s superior calorific value

5 General Principles

The quantity of energy, E , contained in a given quantity of gas, Q , is given by the multiplication of the calorific value, H , by the respective quantity of gas.

Energy may be either measured directly (see [Figure 1](#)) or calculated from the quantity and the calorific value of the gas (see [Figure 2](#)).

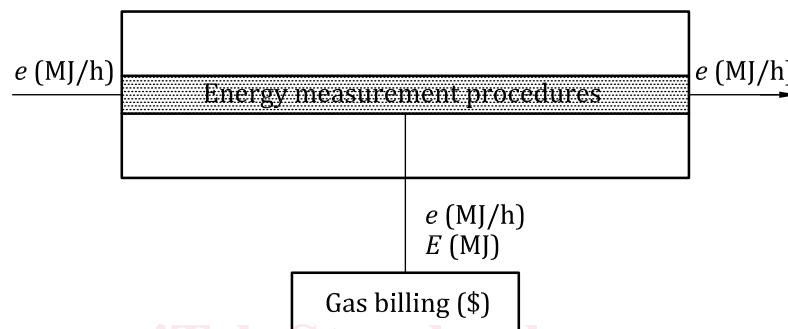


Figure 1 — Energy-measurement scheme

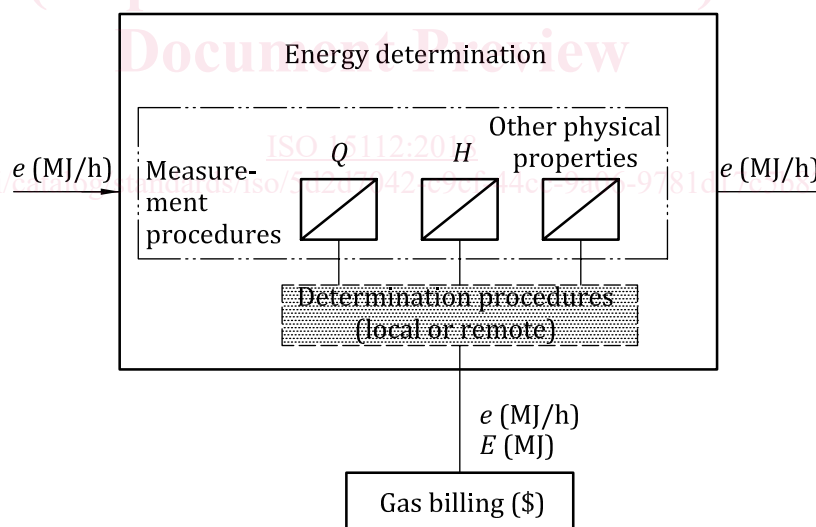


Figure 2 — Energy-determination scheme

Generally, the quantity of gas is expressed as a volume and the calorific value is on a volumetric basis. In order to achieve accurate determinations of energy, it is necessary that both the gas volume and calorific value be under the same reference conditions. The determination of energy is based either on the accumulation over time of calculation results from consecutive sets of calorific values and the concurrent flow rate values, or on the multiplication of the total volume and the representative (assigned) calorific value for that period.

Especially in situations of varying calorific values and when flow rates are determined at a place different from that of the (representative) calorific value, the effect on the accuracy caused by the

difference in time between the determination of the flow rate and the calorific value shall be considered (see [Clause 11](#)).

The gas volume may either be measured and reported as the volume under the ISO-recommended standard reference conditions or be measured under some other conditions and converted to an equivalent volume under the ISO-recommended standard reference conditions, using an appropriate method of volume conversion. The method of volume conversion used at a specific gas-volume-measuring station may require gas quality data determined at other places. For the purpose of this document, the ISO-recommended standard reference conditions of 288,15 K and 101,325 kPa, as defined in ISO 13443, should be used.

NOTE For the gas supply, other conditions can be used, corresponding to national standards or laws. Methods for conversion between different conditions for dry natural gases are given in ISO 13443.

The calorific value may be measured at the gas-measuring station or at some other representative point and assigned to the gas-measuring station. It is also possible for the quantity of gas and the calorific value to be expressed on a mass basis.

This general principle of energy determination is extended in [Clause 10](#) to those cases when the quantity of gas is expressed on either a volumetric or a mass basis.

To achieve the calculation of the quantity of energy of the gas passing a gas-measuring station over a period of time, the methods of energy determination in [Clauses 7](#) to [10](#) are used. Such methods involve an integration over the time period; that integration may be

- of the energy flow, or
- of the gas flow rate over time to obtain the quantity of gas, which is then multiplied by the representative calorific value.

The method of integration may depend on contractual agreements or national legislation.

The general principles of energy determination in [Clauses 7](#) to [10](#) are independent of the method with which the integrations are carried out. The method of integration influences the uncertainty of the determined energy; these effects are considered in [Clause 11](#).

<https://standards.iteh.ai/catalog/standards/iso/5d2d7042-c9cf-44cc-9a06-9781d17c5b87/iso-15112-2018>

6 Gas measurement

6.1 General

The types of measuring devices and methods used in real measuring stations depend among other things on

- the respective national requirements,
- the flow rate,
- the commercial value of the gas,
- the gas quality variations,
- the need for redundancy, and
- the instrument specification.

Only proven methods and measuring devices/products used at the respective interfaces should be used. An overview of the techniques and procedures currently used in different countries is shown in [Annex A](#).