



Designation: E 795 – 00

## Standard Practices for Mounting Test Specimens During Sound Absorption Tests<sup>1</sup>

This standard is issued under the fixed designation E 795; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

### 1. Scope

1.1 These practices cover test specimen mountings to be used during sound absorption tests performed in accordance with Test Method C 423.

1.2 The values stated in SI units are to be regarded as the standard. The values given in parentheses are for information only.

### 2. Referenced Documents

#### 2.1 ASTM Standards:

C 423 Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method<sup>2</sup>

C 634 Terminology Relating to Environmental Acoustics<sup>2</sup>

#### 2.2 ISO Standard:

ISO 354 Measurement of Sound Absorption in a Reverberation Room<sup>3</sup>

### 3. Terminology

#### 3.1 Definitions of Terms Specific to This Standard:

3.1.1 Except as noted in 4.2, the terms used in these practices are defined in Terminology C 634.

3.2 The following terms have the meaning noted for these practices only:

3.2.1 *sound-absorbing units* — consists of test specimens that are in direct contact with or suspended from ceilings, walls, or other room surfaces. Sound-absorbing units include, but are not limited to, baffles, draperies, space absorbers, volume absorbers (bass traps), and other three-dimensional objects.

3.2.2 *test surface*—any hard surface over which the test specimen or test specimen mounting is placed for testing in accordance with Test Method C 423. The surface shall satisfy

the room construction requirements of Test Method C 423. In most cases, the surface will be the floor of the reverberation room.

### 4. Significance and Use

4.1 The sound absorption of a material that covers a flat surface depends not only on the physical properties of the material but also on the way in which the material is mounted over the surface. The mountings specified in these practices are intended to simulate in the laboratory conditions that exist in normal use.

4.2 Some of the specified mountings require special fixtures or minor deviations from normal practice. These fixtures or deviations are to be used only during laboratory tests and should not be specified for practical installations. They are noted in the specifications for the mountings in question by the phrase “for laboratory testing only.”

4.3 Test reports may refer to these mountings by type designation instead of providing a detailed description of the mounting used.

### 5. Classification

5.1 The mountings are designated as follows:

5.1.1 *Type A Mounting*—Test specimen laid directly against the test surface (described in detail in Section 6).

5.1.2 *Type B Mounting*—Test specimen cemented to gypsum board and laid directly against the test surface (described in detail in Section 7).

5.1.3 *Type C Mounting*—Test specimen comprising sound-absorptive material behind a perforated, expanded, open facing or other porous material (described in detail in Section 8).

5.1.4 *Type D Mounting*—Test specimen mounted on wood furring strips (described in detail in Section 9).

5.1.5 *Type E Mounting*—Test specimen mounted with an air space behind it (described in detail in Section 10).

5.1.6 *Type G Mounting*—Test specimen is a drapery, window shade, or blind hung parallel to the test surface (described in detail in Section 11).

5.1.7 *Type H Mounting*—Test specimen is a drapery suspended away from any vertical surface (described in detail in Section 12).

<sup>1</sup> These practices are under the jurisdiction of ASTM Committee E-33 on Environmental Acoustics and are the direct responsibility of Subcommittee E33.01 on Sound Absorption.

Current edition approved May 10, 2000. Published August 2000. Originally published as E 795 – 81. Last previous edition E 795 – 93.

<sup>2</sup> *Annual Book of ASTM Standards*, Vol 04.06.

<sup>3</sup> Available from American National Standards Institute, 11 W. 42nd St., 13th Floor, New York, NY 10036.

5.1.8 *Type I Mounting*—The specimen is a spray- or trowel-applied material on an acoustically hard substrate (described in detail in Section 13).

5.1.9 *Type J Mounting*—The specimen is a sound-absorbing unit or set of sound-absorbing units (described in detail in Section 14).

5.1.10 *Type K Mounting*—Test specimen is an office screen (described in detail in Section 15).

5.1.11 *Type L Mounting*—This mounting is for use with concrete blocks or block-like specimens that are normally assembled using mortar (described in detail in Section 16).

5.2 Type C, D, E, and G mountings are further designated by a numerical suffix which indicates the distance (in millimetres) from the specimen to the test surface rounded to the nearest integral multiple of 5 mm. For example, a Type E-400 mounting is a plenum mounting in which the face of the test specimen is 400 mm (15¾ in.) away from the test surface. The distances specified by the suffixes are as follows:

5.2.1 *For a Type C Mounting*—The thickness of the furring strips.

5.2.2 *For a Type D Mounting*—The thickness of the furring strips.

5.2.3 *For a Type E Mounting*—The distance from the exposed face of the test specimen to the test surface.

5.2.4 *For a Type G Mounting*—The distance from the centerline of the hangers to the test surface.

## 6. Type A Mounting

6.1 Lay the test specimen directly against the test surface as shown in Fig. 1.

6.2 Do not use an adhesive that is likely to leave a thin air space behind the test specimen. However, mechanical fasteners, carpet tape, or contact cement may be used to hold the specimen against a vertical or overhead surface or to keep the specimen in contact with the floor.

6.3 If two or more pieces of material (or separate panels) are butted together to form the test specimen, it may be advisable to cover the joints between adjacent pieces with tape, caulking compound, or other material that is not sound absorptive. If the joints are sealed in this manner, the test report shall describe the method of sealing.

6.4 *Perimeter Seals for Laboratory Testing Only*—If the perimeter edges of the test specimen are not exposed in normal use, seal them by one of the following two methods:

6.4.1 Cover with tape, caulking compound, or a similar product as shown in Fig. 2.

6.4.2 Cover with a wood or metal frame so that the top surface of the frame is flush with the front face of the test specimen as shown in Fig. 2. Minimize air spaces between the frame and the perimeter edge of the test specimen. Air gaps

between the bottom of the frame and the test surface shall be sealed with duct tape or caulking.

NOTE 1—The Type A mounting is intended to simulate normal use where a product, such as carpet, wall panels, or ceiling tile is either laid directly on the floor or attached to a wall or ceiling with adhesive or mechanical fasteners. Panels or tile may be arranged in a pattern that simulates their actual installation, but the arrangement shall be explicitly noted and described in the report.

## 7. Type B Mounting

7.1 Adhere the test specimen to gypsum board laid directly against the test surface as shown in Fig. 3. The thickness of the gypsum board is not critical.

7.2 Apply the adhesive in accordance with the manufacturer's instructions. If there are no specific instructions, apply four daubs of adhesive to the back of each piece of the test specimen.

7.3 *For Laboratory Testing Only*—Place 3 by 25 by 25-mm (¼ by 1 by 1-in.) hardboard shims between the test specimen and the gypsum board at the four corners of each piece of test specimen.

7.4 *Perimeter Seals, for Laboratory Testing Only*—Seal the perimeter edges of the test specimen by one of the following methods:

7.4.1 Cover with tape, caulking compound, or a similar product as shown in Fig. 2.

7.4.2 Cover with a wood or metal frame so that the top surface of the frame is flush with the front face of the test specimen as shown in Fig. 2. Minimize air spaces between the frame and the perimeter edge of the test specimen. Air gaps between the bottom of the frame and the test surface shall be sealed with duct tape or caulking.

NOTE 2—The Type B mounting is intended to simulate acoustical ceiling tiles or other sound-absorptive products adhered to a hard surface with an adhesive. In normal use, this method of application leaves a thin air space between the product and the surface to which it is adhered. The 3-mm (⅛-in.) thick hardboard shims are used to control the depth of the air space during laboratory tests and should not be included in a normal installation.

## 8. Type C Mounting

8.1 The test specimen shall comprise sound-absorptive material behind a perforated, expanded, open facing, or other porous material attached to wood furring strips spaced 600 mm (24 in.) on centers and laid directly against the test surface as shown in Fig. 4. The suffix of the mounting designation shall be the actual thickness of the furring strips rounded to the nearest integral multiple of 5 mm.

8.1.1 The length of the furring strips described in 8.1 shall be shorter than the length of the test specimen by an amount equal to twice the width of the furring strips. This will allow


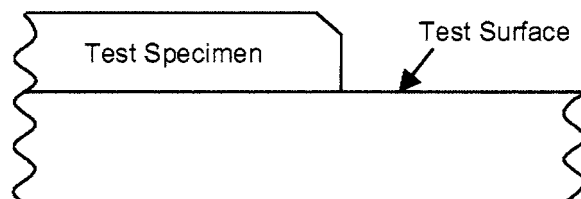


FIG. 1 Type A Mounting

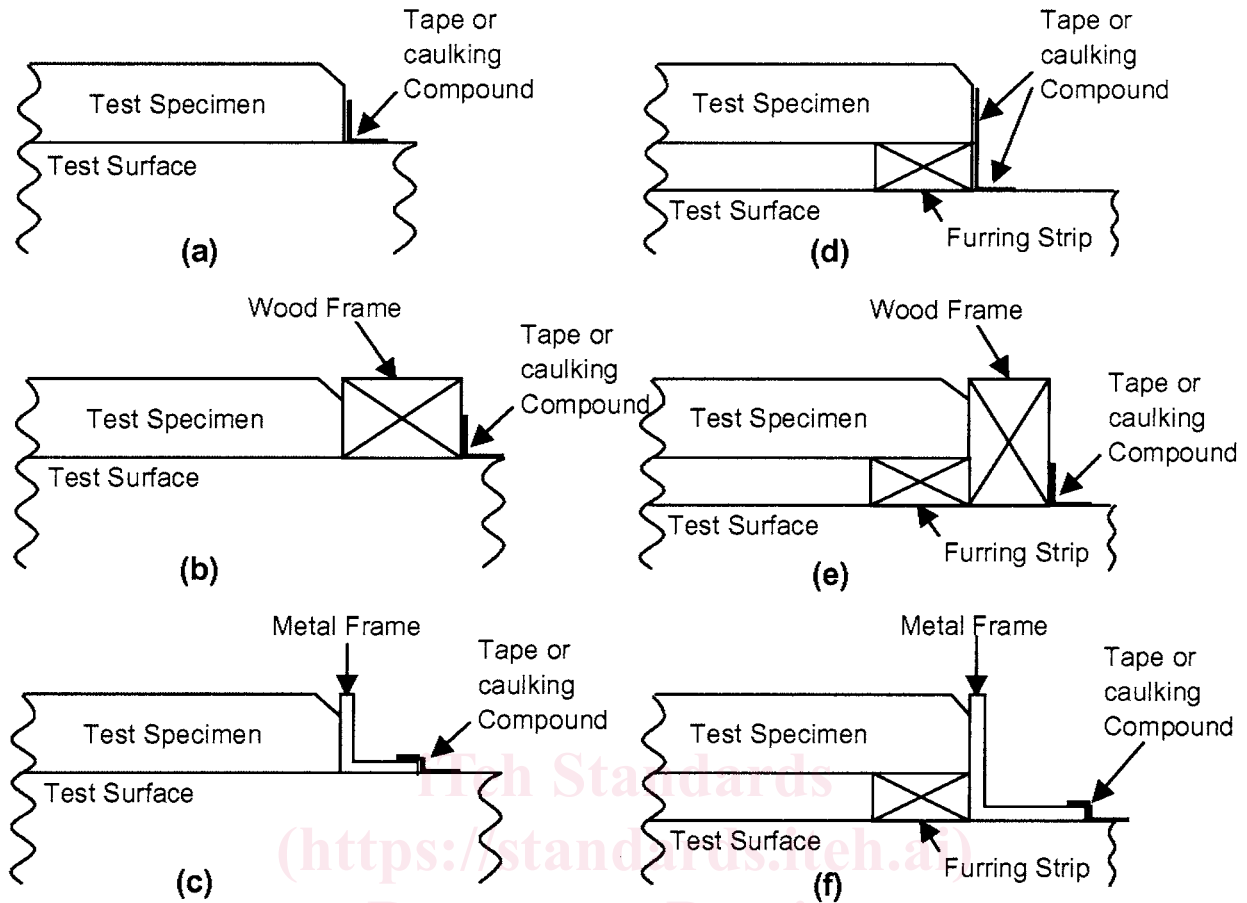

- (a) Tape or caulking compound used to seal a Type A or Type B mounting.
- (b) Wood frame used to seal a Type A or Type B mounting.
- (c) Metal angle frame used to seal Type A or Type B mounting.
- (d) Tape or caulking compound used to seal a Type D mounting.
- (e) Wood frame used to seal a Type D mounting.
- (f) Metal angle frame used to seal a Type D mounting.

FIG. 2 Typical Edge Seals

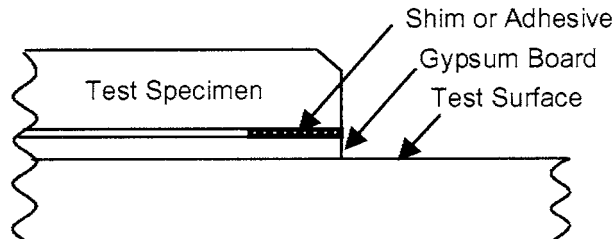


FIG. 3 Type B Mounting

the placement of a furring strip at each end of the system to act as an “end cap” and completely enclose the airspace below the test specimen.

8.2 *Perimeter Seals, for Laboratory Testing Only*—The perimeter furring strips of the test specimen shall be sealed to the test surface with tape or caulking compound.

NOTE 3—The preferred sizes for furring strips are 20 by 40 mm (¾ by

1½ in.) or 40 by 40 mm (1½ by 1½ in.), which corresponds to a C-20 or C-40 mounting.

### 9. Type D Mounting

9.1 Attach the test specimen to wood furring strips spaced at 300 mm (12 in.) on centers and laid directly against the test surface as shown in Fig. 5. The suffix of the mounting

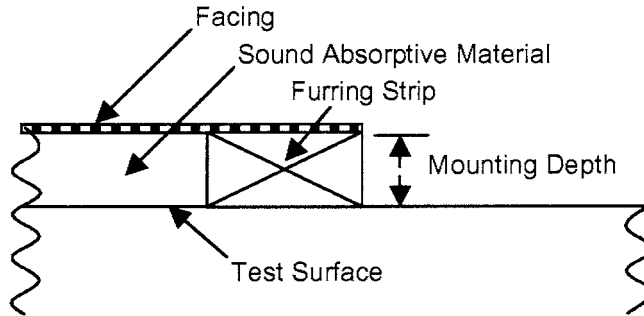


FIG. 4 Type C Mounting

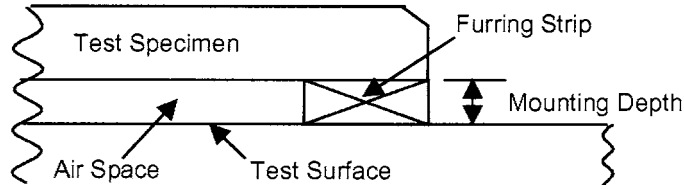


FIG. 5 Type D Mounting

designation shall be the actual thickness of the furring strips rounded to the nearest integral multiple of 5 mm.

9.1.1 The length of the furring strips described in 9.1 shall be shorter than the length of the test specimen by an amount equal to twice the width of the furring strips. This will allow the placement of a furring strip at each end of the system to act as an “end cap” and completely enclose the airspace below the test specimen.

9.2 *Perimeter Seals, for Laboratory Testing Only*—Seal the perimeter edges of the test specimen by one of the following methods:

9.2.1 Cover with tape, caulking compound, or a similar product as shown in Fig. 2.

9.2.2 Cover with a wood or metal frame so that the top surface of the frame is flush with the front face of the test specimen as shown in Fig. 2. Minimize air spaces between the

frame and the perimeter edge of the test specimen. Air gaps between the bottom of the frame and the test surface shall be sealed with duct tape or caulking.

NOTE 4—The preferred size for furring strips is 20 by 40 mm (¾ by 1½ in.). This is a D-20 mounting.

## 10. Type E Mounting

10.1 Mount the test specimen in a fixture that supports the exposed face of the specimen at a designated distance from the test surface as shown in Fig. 6. The suffix of the mounting designation shall be the distance between the exposed face of the specimen and the test surface rounded to the nearest integral multiple of 5 mm.

10.2 *Mounting Fixture for Laboratory Testing Only*—The mounting fixture shall satisfy the following requirements:

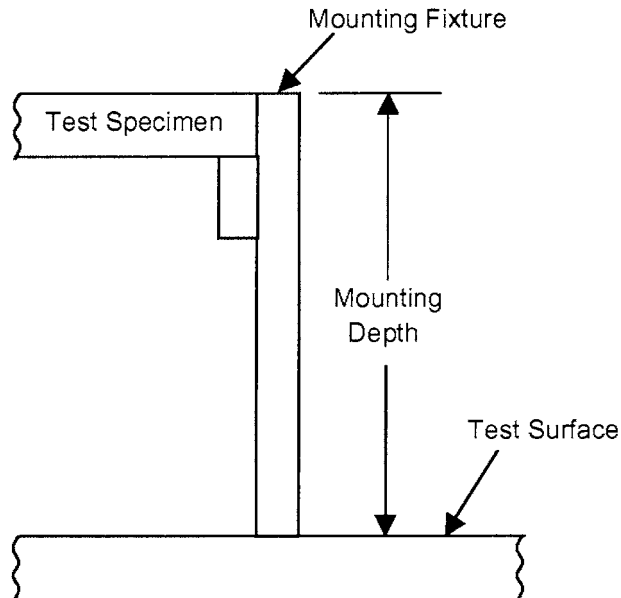


FIG. 6 Type E Mounting