
**Information technology — High
efficiency coding and media delivery
in heterogeneous environments —**

**Part 13:
MMT implementation guidance**

ITeH STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/08e5ccc4-501-4bfc-bac7-e5f1e0f6c0bf/iso-iec-prf-tr-23008-13>

PROOF / ÉPREUVE



ITeH STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/08e5ccba-0501-4bfc-bac7-e5f1e0f6c0bf/iso-iec-prf-tr-23008-13>



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	vii
Introduction	ix
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 General overview of MPEG media transport	1
4.1 System overview.....	1
4.2 Tools specified in ISO/IEC 23008-1.....	2
5 MMT function deployments	3
5.1 General.....	3
5.2 Object reconstruction.....	3
5.2.1 General.....	3
5.2.2 Recovery in MPU mode.....	4
5.2.3 Recovery in GFD mode.....	6
5.3 Default assets.....	6
5.4 Low-delay live streaming.....	7
5.5 Parallel processing in MMT sending and receiving entities.....	9
5.5.1 Processing in MMT sending entity.....	9
5.5.2 Processing in MMT receiving entity.....	11
5.6 MPU streaming for live services.....	13
5.6.1 MPU packetization.....	13
5.6.2 Sending of MPU and signalling message.....	16
5.6.3 MPU generation for SHVC-encoded video in real-time streaming.....	17
5.7 Fast MMT session acquisition.....	19
5.8 Referencing and processing non-timed data.....	20
5.8.1 General.....	20
5.8.2 Resource grouping and referencing.....	20
5.8.3 Receiver handling.....	21
5.9 Media adaptation for quality control in MMTP.....	21
5.9.1 General.....	21
5.9.2 Parameters for media adaptation.....	21
5.9.3 Adaptation operation of MMT entity.....	21
5.10 Hybrid delivery in MMT.....	22
5.10.1 General.....	22
5.10.2 Classification of hybrid delivery.....	22
5.10.3 Technical elements for hybrid delivery.....	23
5.11 Example of detailed implementation of MMT.....	24
5.11.1 Use case: Combination of MMT and MPEG-2 TS for synchronized presentation.....	24
5.11.2 Use case: Combination of MMT and HTTP streaming for synchronized decoding.....	24
5.11.3 Use case: Content request in advance for synchronized play-out.....	25
5.12 HRBM signalling for hybrid delivery.....	26
5.12.1 Hybrid delivery from the single MMT sending entity.....	26
5.12.2 Hybrid delivery from the multiple MMT sending entities.....	27
5.13 Error resilience in MMT protocol.....	29
5.14 Delay constrained ARQ.....	30
5.14.1 General.....	30
5.14.2 Delivery-time constrained ARQ.....	30
5.14.3 Arrival-deadline constrained ARQ.....	31
5.15 Delivery of encrypted MPUs.....	33
5.16 HRBM message updating.....	33
5.16.1 General.....	33

5.16.2	HRBM message sending schedule.....	34
5.16.3	Use case.....	34
5.16.4	HRBM buffer operation in unicast environment.....	35
5.17	MMTP packet with padded data.....	37
5.18	Constraints on signalling splicing points.....	39
5.18.1	General.....	39
5.18.2	Constraints on Case 1 – Asset change at the start of MPU.....	39
5.18.3	Constraints on Case 2 – Asset change at a point in MPU.....	39
5.18.4	Signal the splicing point for target assets in Case 1 and Case 2.....	40
6	Use cases for MMT deployment.....	40
6.1	General.....	40
6.2	Delivery of DASH presentations using MMT.....	40
6.2.1	General.....	40
6.2.2	Delivery of the MPD.....	41
6.2.3	Delivery of the data segments.....	41
6.3	Client operation for DASH service delivered through MMT protocol.....	42
6.3.1	Delivery of MPD with MMTP.....	42
6.3.2	Delivery and consumption of DASH segments with MMTP.....	42
6.4	Hybrid of MMT and DASH over heterogeneous network.....	44
6.5	MMT caching for effective bandwidth utilization.....	45
6.5.1	Overview of MMT caching middlebox architecture.....	45
6.5.2	Content-based caching of MMT media.....	46
6.5.3	MPU sync protocol between server and caching middlebox.....	48
6.5.4	MMT cache manifest.....	53
6.6	Usage of ADC signalling message.....	55
6.6.1	General.....	55
6.6.2	Operation in MMT sending entity.....	55
6.6.3	Operation in MANE router.....	55
6.6.4	Example operation in MMT-receiving entities.....	55
6.6.5	QoE multiplexing gain and bottleneck coordination.....	55
6.7	MMT deployment in Japanese broadcasting systems.....	58
6.7.1	General.....	58
6.7.2	Broadcasting systems using MMT.....	59
6.7.3	Media transport protocol.....	61
6.7.4	Signalling information.....	66
6.7.5	Start-up procedure of broadcasting service.....	74
6.7.6	Actual packet structure.....	77
6.8	MMT deployment in ATSC 3.0 systems.....	79
6.9	Implementation of MMT based on D-TMB in China.....	81
6.9.1	Background.....	81
6.9.2	MMT over legacy DTMB infrastructure.....	81
6.9.3	Use cases.....	81
6.10	Conversion of MMTP stream to MPEG-2 TS.....	83
6.10.1	Overview of conversion operation.....	83
6.10.2	Restrictions to MMTP packets.....	83
6.10.3	Calculation of PTS, DTS.....	83
6.10.4	Restriction related to MPEG-2 T-STD.....	84
6.10.5	Packet field conversion rule.....	85
6.10.6	PSI Conversion rule.....	86
6.11	MMT service provisioning at conventional broadcast environment.....	87
6.12	Usage of multimedia configuration for interface switching management.....	89
6.13	MMT signalling for multiple timed text assets.....	89
6.13.1	Multiple timed text assets within an MMT presentation.....	89
6.13.2	Selective spatial assignment for multiple timed text assets.....	90
6.13.3	Example of multiple timed text assets signalling in MMT.....	92
6.13.4	Carriage of TTML based timed text in MMT.....	92
6.14	Viewport-dependent baseline media profile with packed streaming for VR.....	94

7	Application layer forward error correction (AL-FEC)	97
7.1	FEC decoding method for ssbg_mode2.....	97
7.1.1	General.....	97
7.1.2	Source symbol block format for ssbg_mode2.....	97
7.1.3	Regionalization of source symbol Block for FEC decoding.....	98
7.1.4	How to choose a proper unit of data for FEC decoding.....	102
7.2	Usage of two stage FEC coding structure.....	102
7.2.1	General.....	102
7.2.2	Use case: Hybrid content delivery.....	103
7.2.3	Use case: Streaming multicasting (or broadcasting) to two different end-user groups which is under two different channel conditions each other.....	104
7.3	Usage of layer-aware FEC coding structure.....	104
7.3.1	General.....	104
7.3.2	Use case 1: Layered multicast streaming.....	105
7.3.3	Use case 2: Hybrid delivery.....	106
7.3.4	Use case 3: Fast zapping with long time interleaving (LA-FEC UI).....	107
7.3.5	Use case 4: Prioritized transmission.....	107
7.4	MPU mapping to source packet block.....	108
7.4.1	General.....	108
7.4.2	Aligned MPU mapping method to source packet block.....	108
7.5	FEC for hybrid service.....	109
7.6	Usage of rate-adaptive AL-FEC.....	111
7.6.1	General.....	111
7.6.2	AL-FEC rate control.....	112
7.7	FEC scheme for interleaved source symbol block.....	115
7.7.1	General.....	115
7.7.2	Re-order buffer for interleaved source symbol block.....	115
8	MMT developments in mobile environments	115
8.1	True realtime video streaming over a lossy channel.....	115
8.1.1	General.....	115
8.1.2	Main features.....	115
8.1.3	Ring buffer in the client.....	116
8.1.4	FEC/deFEC performance and delay.....	116
8.1.5	Characteristics of UDP based multi-path and multi-session transmitting for true real-time video streaming.....	116
8.2	Dynamic asset change.....	119
8.3	Media adaptation for quality control.....	121
8.3.1	Use cases of QoS management for adaptive video service.....	121
8.3.2	Advanced adaptation operation of MMT entity: selective transmission.....	125
8.4	Transition time decision using MTR and MTN.....	129
8.5	Usage of DRI and DSI message.....	130
8.5.1	Overview.....	130
8.5.2	Operation in MMT sending entity or MANE.....	130
8.5.3	Operation in MMT receiving entity.....	131
8.6	Usage of dynamic media resource identification information update.....	131
8.6.1	General.....	131
8.6.2	Classification of dynamic media resource allocation.....	131
8.6.3	Operation in MMT sending entity.....	131
8.6.4	Operation in MMT receiving entity.....	132
8.6.5	Example operation in MANE proxy.....	132
8.7	MMT service list.....	134
8.8	Usage of DNS message for MMT URL resolution.....	135
8.8.1	General.....	135
8.8.2	Example on DNS resolution procedure.....	135
8.9	Usage of guide information for dynamic media resource allocation.....	137
8.9.1	General.....	137
8.9.2	Classification of guide information.....	137
8.9.3	Classification of dynamic media resource allocation.....	137

8.9.4	Operation in MANEs	138
8.9.5	Operation in MMT sending entity	138
8.9.6	Example of dynamic media resource allocation using guide information	138
8.10	Usage of DARI for supporting DNS in MMT	139
8.10.1	General	139
8.10.2	Classification of DARI proxy	139
8.10.3	Operation in MANE DNS or DNS	140
8.10.4	Operation in DARI proxy	140
8.10.5	Relation between the media resource identification in MMT and DNS message	140
Bibliography		142

ITeH STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/08e5ccba-0501-4bfc-bac7-e5f1e0f6c0bf/iso-iec-prf-tr-23008-13>

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents) or the IEC list of patent declarations received (see <http://patents.iec.ch>).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 29, *Coding of audio, picture, multimedia and hypermedia information*.

This third edition cancels and replaces the second edition (ISO/IEC 23008-13:2017), which has been technically revised. The main changes compared to the previous edition are as follows:

- Guidance added to show how the MMT protocol can transmit media streams adaptively to environment changes such as network congestions, while also minimizing service quality degradation.
- Guidance added to describe the scenario in which MMT and MPEG-2 TS are used as transport schemes in broadband networks and broadcast channels, respectively.
- Guidance added for constraints on signalling splicing points that are specified for changing points or splicing points on MMT assets.
- Application Layer Forward Error Correction (AL-FEC) guidance added to describe the usage of Rate-Adaptive AL-FEC, Layer-Aware (LA) FEC coding structure and FEC scheme for interleaved source symbol block.
- Broadcasting MMT deployment guidance added to describe the implementation of MMT based on D-TMB in China and MMT Deployment in ATSC 3.0 systems.
- MMT deployment guidance added to show the usage of MMT signalling for multiple timed text assets and for the viewport-dependent baseline media profile with packed streaming for VR.
- MMT developments in mobile environments guidance added to describe the usage of true real time video streaming over lossy channels, dynamic asset change, and media adaptation for quality control.
- MMT developments in mobile environments guidance added to describe the usage of signalling messages for supporting Package retransmission and dynamic media resource allocation.

A list of all parts in the ISO/IEC 23008 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/08e5ccba-0501-4bfc-bac7-e5f1e0f6c0bf/iso-iec-prf-tr-23008-13>

Introduction

This document provides guidance for implementation and deployment of multimedia systems based on ISO/IEC 23008-1. These document include the following:

- Guidance on usage of MMT functions;
- Guidance on deployment use cases designed based on ISO/IEC 23008-1.

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/08e5ccba-0501-4bfc-bac7-e5f1e0f6c0bf/iso-iec-prf-tr-23008-13>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Full standard:
<https://standards.iteh.ai/catalog/standards/sist/08e5ccba-0501-4bfc-bac7-e5f1e0f6c0bf/iso-iec-prf-tr-23008-13>

Information technology — High efficiency coding and media delivery in heterogeneous environments —

Part 13: MMT implementation guidance

1 Scope

This document provides guidance for implementing and deploying systems based on ISO/IEC 23008-1.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 23008-1:2017, *Information technology — High efficiency coding and media delivery in heterogeneous environments — Part 1: MPEG media transport (MMT)*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 23008-1 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

4 General overview of MPEG media transport

4.1 System overview

This clause describes the exemplary but typical system overview of MPEG media transport (MMT) as shown in [Figure 1](#).

The media origin provides A/V media or generic files to MMT sending entity in the form of packages or assets which are defined in ISO/IEC 23008-1. A package is comprised of assets, presentation information and transparent characteristics, etc. physically, an asset is a group of MPUs or generic files.

The MMT sending entity fragments MPU/generic files and generates MMTP packets to deliver A/V media data itself. Concurrently, it also generates signalling message for the successful delivery and presentation of A/V media included on that MMTP packet flow.

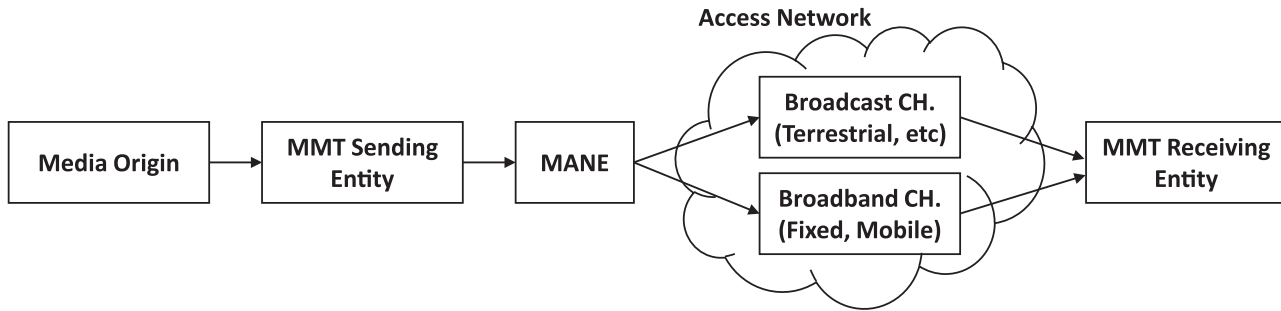


Figure 1 — Example of MMT-based media distribution chain

The MMT aware network element (MANE) may be any network element, such as, media caches and routers, that aware of MMTP and has augmented functions for its own purposes to utilize tools from MMT.

Then, MMTP packets can be transmitted through either or both of broadcast channel and broadband channel at its own environment and scenarios.

The CI information provides presentation information, such as the location of media objects as well as the timing and relation of the media objects that the MMT receiving entity has to follow. This information is provided by the MMT sending entity and also pushes related MMTP packet flow to the MMT receiving entity. It means it fully controls the media streaming session, i.e., it manages the on-time delivery, playback and temporal/spatial presentation information of the media.

4.2 Tools specified in ISO/IEC 23008-1

ISO/IEC 23008-1 specifies a set of tools to enable advanced media transport and delivery services. Figure 2 depicts the end-to-end architecture and illustrates the different functional tools and their relationships. Moreover, it shows interfaces between existing protocols and standards defined by ISO/IEC 23008-1 and those defined in other specifications. The tools spread over three different functional areas: media processing unit (MPU) format; delivery; and signalling defined in ISO/IEC 23008-1 as follows:

- The media processing unit (MPU) defines the logical structure of media content format of the data units to be processed by an MMT entity and their instantiation with ISO base media file format as specified in ISO/IEC 14496-12.
- The delivery function defines an application layer transport protocol and a payload format. The MMTP transport protocol provides enhanced features for delivery of multimedia data, e.g., multiplexing and support of mixed use of streaming and download delivery in a single packet flow. The payload format is defined to enable the carriage of encoded media data which is agnostic to media types and encoding methods.
- The signalling function defines formats of signalling messages to manage delivery and consumption of media data.

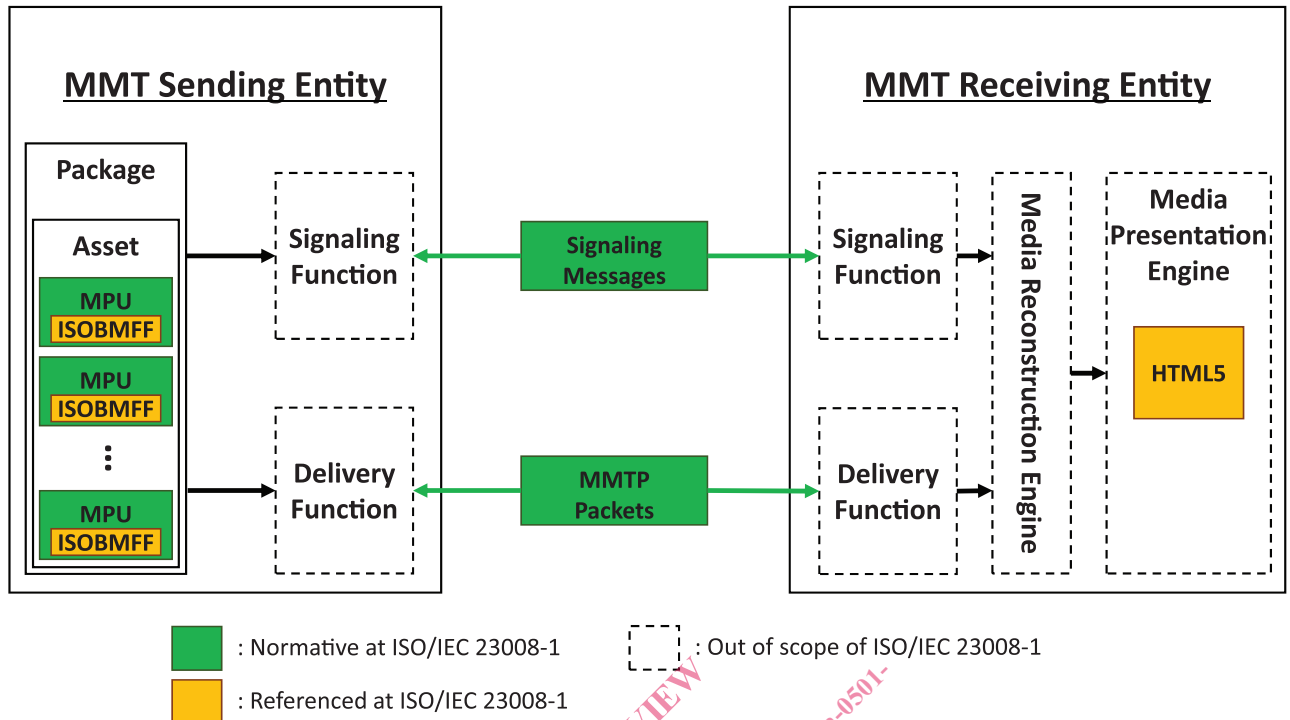


Figure 2 — MMT functions deployment

Other aspects, such as client implementations for media reconstruction and presentation itself are not defined in ISO/IEC 23008-1.

5 MMT function deployments

5.1 General

This clause gives implementation guidance on general MMT deployment based on basic functionalities provided by ISO/IEC 23008-1. In particular, it provides guidance on how to make best use of ISO/IEC 23008-1 for the basic topics such as, but not limited to;

- low delay media consumption;
- media adaptation;
- hybrid delivery;
- error recovery.

5.2 Object reconstruction

5.2.1 General

MMTP is designed to deliver object flows that may be multiplexed together in the same MMTP flow. The objects of an object flow are usually related to each other, meaning that the application is likely to consume all objects of an object flow, if the flow or one of its objects is of interest to that application.

Depending on the delivery mode, the recovery of the object may differ. The GFD mode usually requires that the full object is recovered prior to its delivery to the application. However, the application may request that correctly received contiguous byte ranges of the object are forwarded to the application.