



SLOVENSKI STANDARD
oSIST prEN ISO 13473-5:2024
01-junij-2024

Karakterizacija teksture vozišča z uporabo profilov površine - 5. del: Ugotavljanje megateksture (ISO/DIS 13473-5:2024)

Characterization of pavement texture by use of surface profiles - Part 5: Determination of megatexture (ISO/DIS 13473-5:2024)

Charakterisierung der Textur von Fahrbahnbelägen unter Verwendung von Oberflächenprofilen - Teil 5: Bestimmung der Megatextur (ISO/DIS 13473-5:2024)

Caractérisation de la texture d'un revêtement de chaussée à partir de relevés de profils de la surface - Partie 5: Détermination de la mégatexture (ISO/DIS 13473-5:2024)

Ta slovenski standard je istoveten z: prEN ISO 13473-5

[oSIST prEN ISO 13473-5:2024](https://standards.sist.net/catalog/standards/sist/13473-5-2024/pr-en-iso-13473-5-2024)

ICS:

17.140.30	Emisija hrupa transportnih sredstev	Noise emitted by means of transport
93.080.20	Materiali za gradnjo cest	Road construction materials

oSIST prEN ISO 13473-5:2024

en,fr,de



DRAFT International Standard

ISO/DIS 13473-5

Characterization of pavement texture by use of surface profiles —

Part 5: Determination of megatexture

*Caractérisation de la texture d'un revêtement de chaussée à
partir de relevés de profils de la surface —*

Partie 5: Détermination de la mégatexture

ICS: 17.140.30; 93.080.20

ISO/TC 43/SC 1

Secretariat: DIN

Voting begins on:
2024-04-11

Voting terminates on:
2024-07-04

Document Preview

[oSIST prEN ISO 13473-5:2024](https://standards.iteh.ai/catalog/standards/sist/13001b8e-9d6c-4d81-a105-dd8c6b5fca1c/osist-pren-iso-13473-5-2024)

<https://standards.iteh.ai/catalog/standards/sist/13001b8e-9d6c-4d81-a105-dd8c6b5fca1c/osist-pren-iso-13473-5-2024>

This document is circulated as received from the committee secretariat.

ISO/CEN PARALLEL PROCESSING

Reference number
ISO/DIS 13473-5:2024(en)

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENTS AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

© ISO 2024

ISO/DIS 13473-5:2024(en)

iTeh Standards (<https://standards.iteh.ai>) Document Preview

[oSIST prEN ISO 13473-5:2024](https://standards.iteh.ai/catalog/standards/sist/13001b8e-9d6c-4d81-a105-dd8c6b5fca1c/osist-pren-iso-13473-5-2024)

<https://standards.iteh.ai/catalog/standards/sist/13001b8e-9d6c-4d81-a105-dd8c6b5fca1c/osist-pren-iso-13473-5-2024>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2024

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

© ISO 2024 – All rights reserved

ISO/DIS 13473-5:2024(en)

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
3.1 General terms.....	2
3.2 Ranges of texture.....	3
3.3 Megatexture measurement method.....	5
4 Measurement instruments	6
4.1 Instruments in general.....	6
4.1.1 Performance check.....	6
4.1.2 Indication of invalid readings (drop-outs).....	6
5 Test surface considerations	7
5.1 General.....	7
5.2 Test lengths.....	7
6 Measurement method	8
6.1 General.....	8
6.2 Sensitivity to vertical motion of the vehicle.....	8
6.3 Calibration.....	8
6.4 Measuring speed.....	9
6.5 Measurement of the texture profile.....	9
7 Data processing	9
7.1 General.....	9
7.2 Preprocessing: drop-out rate and validity of measurements.....	9
7.3 Resampling to a certain spatial resolution.....	10
7.4 Spike identification and reshaping the profile.....	11
7.5 Filtering of the profile.....	11
7.6 Calculation of RMS_{Me}	11
7.7 Averaging.....	11
7.8 Longitudinal standard deviation (informative).....	11
7.9 Singularities.....	12
8 Measurement uncertainty	12
9 Safety considerations during measurements	14
10 Test report	14
Annex A (normative) Spike removal procedure	16
Annex B (informative) Example of test report and graphical presentations	19
Annex C (informative) Measurement uncertainty	24
Annex D (normative) Megatexture digital filters	27
Annex E (informative) Megatexture reference program code	29
Annex F (informative) Procedure for sampling of measurement sections if the whole area of interest cannot be measured	30
Annex G (normative) Profile conditioning before filtering	33
Annex H (Informative) Guidelines for choosing a suitable Calculation Length	36
Bibliography	38

ISO/DIS 13473-5:2024(en)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 43, *Acoustics*, Subcommittee SC 1, *Noise*.

This second edition cancels and replaces the first edition (ISO 13473-5:2009), which has been technically revised.

The major improvements are:

- default measure RMS_{Me} in mm instead of L_{me} in dB;
- use the same pre-processing procedures as in ISO 13473-1 (drop-out and spikes);
- use digital filters to calculate megatexture, earlier done by spectral analysis;
- improvements of the uncertainty description of megatexture calculations;
- informative annex with reference program and reference calculations, available at the www.erpug.org homepage. A list of all parts in the ISO 13473 series can be found on the ISO website.

ISO 13473 consists of the following parts, under the general title *Characterization of pavement texture by use of surface profiles*:

- *Part 1: Determination of Mean Profile Depth*
- *Part 2: Terminology and basic requirements related to pavement texture profile analysis*
- *Part 3: Specification and classification of profilometers*
- *Part 4: Spectral analysis of surface profiles* [Technical Specification]
- *Part 5: Determination of megatexture*
- *Part 6: Verification of the performance of laser profilometers used for pavement texture measurements* [Publicly Available Specification]

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

ISO/DIS 13473-5:2024(en)

Introduction

Pavement surface texture largely influences factors such as noise emission caused by tyre/road interaction (Reference [6]), tyre/pavement friction (Reference [7]), and comfort, as well as rolling resistance (Reference [11]) and wear of tyres. Reliable methods of measuring and characterizing texture are therefore essential. Texture is subdivided into micro-, macro- and megatexture according to ISO 13473-2. A method for measurement and calculation of a macrotexture indicator based on a profile measurement is specified in ISO 13473-1[12]. A procedure for measuring macrotexture by the volumetric patch method is described in EN 13036-1:2010.[4] Currently, no reliable and practical method of measuring pavement microtexture *in situ* is available. This document aims to provide means of measuring and calculating a megatexture indicator useful for pavement surface characterization.

Megatexture is an important texture range lying between macrotexture and unevenness. This type of texture has wavelengths of the same order of magnitude as a tyre/road interface and is often a result of potholes or 'washboarding'. Some common types of singularities, such as a single depressed (e.g. a pothole) or protruding (e.g. caused by tree roots) spot on the pavement, will also show up in a texture profile spectrum as megatexture. Although some pavements, such as paving stones, possess an intrinsic megatexture, it is usually an unwanted characteristic resulting from defects in the surface. Megatexture is an undesirable feature, the higher the value, the worse the road is perceived: megatexture is known to increase tyre/road noise by inducing tyre vibrations. At the same time, these tyre vibrations cause energy dissipation in the tyre. The rolling resistance increases and this leads to highly unwanted fuel consumption and CO₂ emission (see also [clause 3.2](#)).

The scope of ISO 13473 (all parts) does not include profile analysis of road unevenness, which is dealt with in ISO 8608[1].

iTeh Standards (<https://standards.iteh.ai>) Document Preview

[oSIST prEN ISO 13473-5:2024](https://standards.iteh.ai/catalog/standards/sist/13001b8e-9d6c-4d81-a105-dd8c6b5fca1c/osist-pren-iso-13473-5-2024)

<https://standards.iteh.ai/catalog/standards/sist/13001b8e-9d6c-4d81-a105-dd8c6b5fca1c/osist-pren-iso-13473-5-2024>

Characterization of pavement texture by use of surface profiles —

Part 5: Determination of megatexture

1 Scope

This document specifies a procedure for determining the magnitude of pavement surface megatexture by measuring the surface profile and calculating a megatexture descriptor from this profile. The technique is designed to give meaningful and accurate measurements and descriptions of pavement megatexture for various purposes, such as for the prediction of the acoustic quality of the pavement or the assessment of the rolling resistance.

Since there is an overlap between megatexture and the surrounding ranges, megatexture descriptors unavoidably have a certain correlation with corresponding measures in those ranges. This document specifies measurements and procedures which are in relevant parts compatible with those in ISO 13473-1^[16], ISO 8608^[4] and EN 13036-5^[5].

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 13473-2, *Characterization of pavement texture by use of surface profiles — Part 2: Terminology and basic requirements related to pavement texture profile analysis*

ISO 13473-3, *Characterization of pavement texture by use of surface profiles — Part 3: Specification and classification of profilometers*

ISO/PAS 13473-6, *Characterization of pavement texture by use of surface profiles — Part 6: Verification of the performance of laser profilometers used for pavement texture measurements*

ISO/IEC NP Guide 98-3, *Uncertainty of measurement — Part 3: Guide to the expression of uncertainty in measurement (GUM)*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 13473-2 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

ISO/DIS 13473-5:2024(en)

3.1 General terms

3.1.1

texture wavelength

λ

quantity describing the horizontal dimension of the irregularities of a *texture profile* (3.1.3)

Note 1 to entry: Texture wavelength is normally expressed in metres (m) or millimetres (mm).

Note 2 to entry: Texture wavelength is a descriptor of the wavelength components of the profile and is related to the concept of the Fourier Transform of a series regularly sampled measurement points along a spatial axis. Vertical displacement (height) has an arbitrary reference.

3.1.2

pavement texture texture

deviation of a pavement surface from a true planar surface, with a *texture wavelength* (3.1.1) less than 0,5 m

Note 1 to entry: It is divided into micro-, macro- and megatexture according to 3.2.

3.1.3

surface profile texture profile


upper contour of a vertical cross-section through a pavement

Note 1 to entry: the surface profile (texture profile) is further indicated with its mathematical descriptor $Z(X)$.

Note 2 to entry: A typical profile recording of a pavement surface is illustrated in Figure 1 (vertical scale exaggerated), including the terms profile, distance, vertical displacement and wavelength. "Wavelength" in the figure is an illustration of a component of the profile related to the wavelength concept but it is not correct from a strictly mathematical point of view. Furthermore, the reference (bottom) line is arbitrary.

Note 3 to entry: The profile of the surface is described by two coordinates: one in the surface plane, called distance (the abscissa), and the other in a direction normal to the surface plane, called vertical displacement (the ordinate). An example is given in Figure 1. The distance may be in the longitudinal or lateral (transverse) directions in relation to the travel direction on a pavement, or in any other direction between these extremes.

Note 4 to entry: Texture profile is similar to surface profile but limited to the texture range.

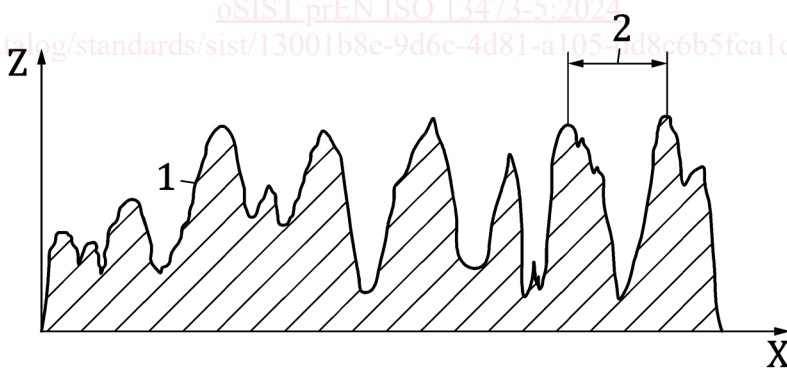

Key

- X distance
- Z vertical displacement
- 1 surface profile
- 2 texture wavelength

Figure 1 — Illustration of some basic terms describing pavement surface texture

ISO/DIS 13473-5:2024(en)

3.1.4

drop-out

data in the measured texture profile indicated by the sensor as invalid

3.1.5

spike

unusually high and sharply defined peak in the measured texture profile, which is not part of the true texture profile and is not indicated as invalid by the sensor

Note 1 to entry: See [Annex A](#) for a quantitative definition of a spike.

3.1.6

profilometer


device used for measuring the texture profile of pavement surface

Note 1 to entry: Current designs of profilometers used in pavement engineering include, but are not limited to, sensors based on laser, light sectioning, needle tracer and ultrasonics technologies.

Note 2 to entry: Specifications for profilometers are dealt with in ISO 13473-3.

3.2 Ranges of texture

Based on physical relations between texture and friction, noise, etc., the World Road Association (PIARC) has defined the ranges of micro-, macro- and megatexture earlier; see Reference [10]. [Figure 2](#) illustrates how these definitions cover certain ranges of surface texture wavelength and spatial frequency, and how various characteristics are influenced within these ranges.

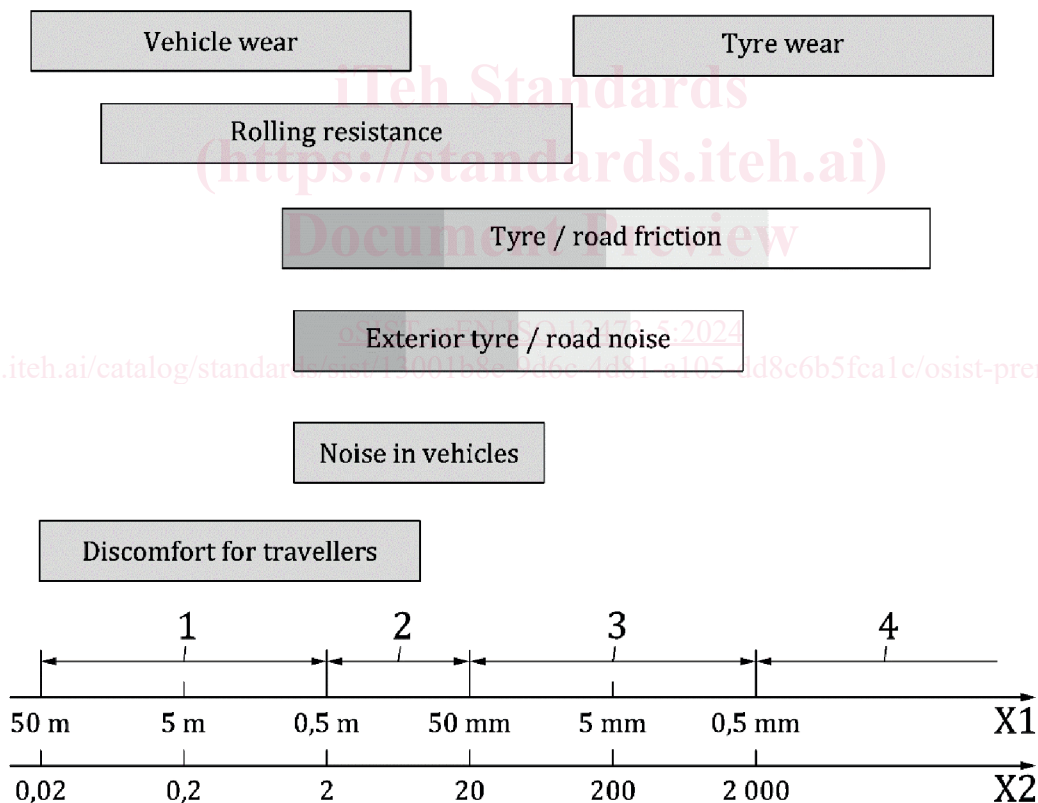

Key

- X1 wavelength
- X2 spatial frequency [1/m]
- 1 unevenness

ISO/DIS 13473-5:2024(en)

- 2 megatexture
- 3 macrotexture
- 4 microtexture

NOTE A lighter shade indicates a favourable effect over this range and a darker shade indicates an unfavourable effect.

Figure 2 — Ranges in terms of wavelength and spatial frequency of texture and unevenness and their most significant, anticipated effects^[10]

3.2.1

microtexture

pavement microtexture

deviation of a pavement surface from a true planar surface with the characteristic dimensions along the surface of less than 0,5 mm, corresponding to texture wavelengths up to 0,5 mm expressed as one-third-octave centre wavelengths

Note 1 to entry: Peak-to-peak amplitudes normally vary in the range 0,001 mm to 0,5 mm. This type of texture is the texture which makes the surface feel more or less harsh but which is usually too small to be observed by the eye. It is produced by the surface properties (sharpness and harshness) of the individual aggregate or other particles of the surface which come in direct contact with the tyres.

3.2.2

macrotexture

pavement macrotexture

deviation of a pavement surface from a true planar surface with the characteristic dimensions along the surface of 0,5 mm to 50 mm, corresponding to texture wavelengths with one-third-octave bands including the range 0,63 mm to 50 mm of centre wavelengths

Note 1 to entry: Peak-to-peak amplitudes may normally vary in the range 0,1 mm to 20 mm. This type of texture is the texture which has wavelengths of the same order of size as tyre tread elements in the tyre/road interface. Surfaces are normally designed with a sufficient macrotexture to obtain a suitable water drainage in the tyre/road interface. The macrotexture is obtained by suitable proportioning of the aggregate and mortar of the mix or by surface finishing techniques. The size of the macrotexture has a positive correlation with the stone size of the pavement.

3.2.3

megatexture

pavement megatexture

deviation of a pavement surface from a true planar surface with the characteristic dimensions along the surface of 50 mm to 500 mm, corresponding to texture wavelengths with one-third-octave bands including the range 63 mm to 500 mm of centre wavelengths

Note 1 to entry: Peak-to-peak amplitudes normally vary in the range 0,1 mm to 50 mm. This type of texture is composed of wavelengths with the same order of size as a typical tyre/road interface and is often created by potholes or ripples in the surface. It is usually an unwanted characteristic resulting from defects in the surface, but it can as well be intrinsic to the pavement (e.g. cobble stones). Surface roughness with longer wavelengths than megatexture is referred to as unevenness and typically takes the form of undulations in the surface.

3.2.4

unevenness

pavement unevenness

deviation of a pavement surface from a true planar surface with the characteristic dimensions along the surface of 0,5 m to 50 m, corresponding to wavelengths with one-third-octave bands including the range 0,63 m to 50 m of centre wavelengths

Note 1 to entry: Pavement characteristics at wavelengths longer than 0,5 m are considered to be above that of texture and are referred to here as "unevenness". For airfield applications, even wavelengths longer than 50 m would be considered.