



SLOVENSKI STANDARD
oSIST prEN 15338:2023
01-junij-2023

Pohištveno okovje - Trdnost in trajnost izvlečnih elementov in njihovih sestavnih delov

Hardware for furniture - Strength and durability of extension elements and their components

Möbelbeschläge - Festigkeit und Dauerhaltbarkeit von Auszügen und deren Komponenten

Quincaillerie d'ameublement - Résistance mécanique et endurance des éléments extractibles et de leurs composants

Ta slovenski standard je istoveten z: prEN 15338

ICS:

97.140 Pohištvo Furniture

oSIST prEN 15338:2023 **en,fr,de**

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

DRAFT
prEN 15338

April 2023

ICS 97.140

Will supersede EN 15338:2007+A1:2010

English Version

Hardware for furniture - Strength and durability of extension elements and their components

Quincaillerie d'ameublement - Résistance mécanique et
endurance des éléments extractibles et de leurs
composants

Möbelbeschläge - Festigkeit und Dauerhaltbarkeit von
Auszügen und deren Komponenten

This draft European Standard is submitted to CEN members for enquiry. It has been drawn up by the Technical Committee CEN/TC 207.

If this draft becomes a European Standard, CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

This draft European Standard was established by CEN in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Warning : This document is not a European Standard. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a European Standard.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

Contents

	Page
European foreword.....	4
Introduction	5
1 Scope.....	6
2 Normative references.....	6
3 Terms and definitions	6
4 General test conditions	7
4.1 Preliminary preparation	7
4.2 Test equipment.....	7
4.3 Application of forces	8
4.4 Tolerances	8
4.5 Sequence of testing.....	8
4.6 Inspection and assessment of results	8
5 Test apparatus.....	8
5.1 Loading pad.....	8
5.2 Apparatus for slam-shut/open tests	8
5.3 Masses	9
5.4 Glass marbles.....	9
5.5 Loads for filing pockets.....	9
5.6 Test frame and test drawer	9
5.7 Particle board properties.....	10
5.8 Wood component	11
6 Test procedures and requirements.....	11
6.1 General.....	11
6.2 Overload tests.....	11
6.2.1 General.....	11
6.2.2 Vertical downwards static overload	11
6.2.3 Horizontal sideways static overload.....	11
6.2.4 Outwards static overload	12
6.2.5 Slam-shut/open	12
6.3 Functional tests.....	13
6.3.1 General.....	13
6.3.2 Deflection of extension element bottoms.....	13
6.3.3 Deformation of front and back.....	13
6.3.4 Operating forces	14
6.3.5 First vertical downwards static load test	14
6.3.6 First horizontal sideways static load	15
6.3.7 Determination of reference point for the deflection of front.....	15
6.3.8 Durability	15
6.3.9 Deflection of front.....	16
6.3.10 Second vertical downwards static load.....	16
6.3.11 Second horizontal sideways static load	16
6.3.12 Operating forces	17
6.3.13 Slam-shut/open	17
6.4 Corrosion resistance.....	17

6.5	Test report	17
Annex A (normative)	Product information system	18
Annex B (normative)	Apparatus for slam-shut/open of extension elements.....	19
Annex C (normative)	Test parameters.....	23

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[oSIST prEN 15338:2023](https://standards.iteh.ai/catalog/standards/sist/b805a43d-9727-4702-9a12-abb92ab7547e/osist-pren-15338-2023)

<https://standards.iteh.ai/catalog/standards/sist/b805a43d-9727-4702-9a12-abb92ab7547e/osist-pren-15338-2023>

prEN 15338:2023 (E)

European foreword

This document (prEN 15338:2023) has been prepared by Technical Committee CEN/TC 207 “Furniture”, the secretariat of which is held by UNI.

This document is currently submitted to the CEN Enquiry.

This document will supersede EN 15338:2007+A1:2010.

The main changes compared to the previous edition are listed below:

- updating of normative references;
- revision of 6.4 “Corrosion resistance”;
- deletion of A.6 “Corrosion test”;
- editorial revision of the entire document.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/b805a43d-9727-4702-9a12-abb92ab7547e/osist-pren-15338-2023>

Introduction

The aim of this document is to provide furniture manufacturers, designers and developers with comparable information regarding the performance of extension elements and drawers.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[oSIST prEN 15338:2023](https://standards.iteh.ai/catalog/standards/sist/b805a43d-9727-4702-9a12-abb92ab7547e/osist-pren-15338-2023)

<https://standards.iteh.ai/catalog/standards/sist/b805a43d-9727-4702-9a12-abb92ab7547e/osist-pren-15338-2023>

1 Scope

This document specifies test methods and requirements for the strength and durability of all types of extension elements and their components for all fields of application, except table extensions.

The tests consist of the application of loads, forces and velocities simulating normal functional use, as well as misuse, that can reasonably be expected to occur.

With the exception of the corrosion test in 6.4, the tests are designed to evaluate properties without regard to materials, design/construction or manufacturing processes.

The strength and durability tests only relate to the extension elements and the parts used for the attachment, e.g. screws.

The strength and durability tests are carried out in a test frame with specified properties. The test results can only be used as a guide to the performance of a piece of furniture.

The test results are only valid for the extension element tested. These results may be used to represent the performance of production models provided that the tested model is representative of the production model.

Ageing and influences of heat and humidity are not included.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 320, *Particleboards and fibreboards - Determination of resistance to axial withdrawal of screws*

EN 323, *Wood-based panels - Determination of density*

EN 17737, *Hardware for furniture - Test and evaluation methods for the corrosion resistance of furniture fittings*

EN ISO 6270-2, *Paints and varnishes - Determination of resistance to humidity - Part 2: Condensation (in-cabinet exposure with heated water reservoir) (ISO 6270-2)*

EN ISO 10289, *Methods for corrosion testing of metallic and other inorganic coatings on metallic substrates - Rating of test specimens and manufactured articles subjected to corrosion tests (ISO 10289)*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.1 catch device
device which keeps or pulls an extension element in place, but does not require a second action in order to release it

EXAMPLES A magnetic catch or a self-closing or self-opening mechanism.

3.2

extension element

components that can be pulled out and pushed in

EXAMPLES Drawers, suspended pocket files, keyboard trays.

3.3

loading capacity

M

mass in kg, as specified by the manufacturer, for which the extension element will fulfil the strength and durability requirements

Note 1 to entry: The loading capacity includes the extension element and the load in/on the extension element. In other EN standards, this is referred to as total mass.

3.4

damper

mechanism which gently brings the extension element to a stop

4 General test conditions

4.1 Preliminary preparation

The extension element shall be assembled/mounted according to the instructions supplied with it.

If mounting or assembly instructions are not supplied, the most adverse configuration shall be used and the mounting or assembly method shall be recorded in the test report. Fittings shall be tightened before testing and shall not be re-tightened unless specifically required in the manufacturer's instructions. If the configuration needs to be changed to produce the worst-case conditions, this shall be recorded in the test report.

For testing a range of related extension elements, only worst case(s) need to be tested.

The tests shall be carried out in indoor ambient conditions at a temperature between 15 °C and 25 °C. If during a test the temperature is outside of the range of 15 °C to 25 °C, the maximum and/or minimum temperature shall be recorded in the test report.

Extension elements which include structural hardware parts made of hygroscopic plastic materials, e.g. polyamide shall be conditioned at (23 ± 5) °C and a relative humidity of (50 ± 5) % for at least 7 days before testing.

In the case of designs not addressed in the test procedures, the test shall be carried out as far as possible as described, and deviations from the test procedure recorded in the test report.

Before beginning the testing, visually inspect the extension element thoroughly. Record any defects so that they are not assumed to have been caused by the tests. Carry out measurements when specified.

4.2 Test equipment

Unless otherwise specified, the tests may be applied by any suitable device, because results are not dependent upon the apparatus.

The equipment shall not inhibit deformation of the extension element, i.e. it shall be able to move so that it can follow the deformation of the extension element during testing.

All loading pads shall be capable of pivoting in relation to the direction of the applied force. The pivot point shall be as close as practically possible to the load surface.

prEN 15338:2023 (E)**4.3 Application of forces**

The forces in the static load tests shall be applied sufficiently slowly to ensure that negligible dynamic force is applied. Unless otherwise specified, each force shall be maintained for not less than 10 s and not more than 15 s.

The forces in durability tests shall be applied at a rate to ensure that excessive heating does not occur.

The forces may be replaced by masses. The relation $10 N = 1 \text{ kg}$ may be used for this purpose.

4.4 Tolerances

Unless otherwise stated, the following tolerances are applicable:

Forces: $\pm 5 \%$ of the nominal force;

Velocities: $\pm 5 \%$ of the nominal velocity;

Masses: $\pm 1 \%$ of the nominal mass;

Dimensions: $\pm 1 \text{ mm}$ of the nominal dimension;

Angles: $\pm 2^\circ$ of the nominal angle;

The accuracy for the positioning of loading pads shall be $\pm 5 \text{ mm}$.

4.5 Sequence of testing

The tests shall be carried out in the same sequence as the clauses are numbered in this document. If the clause sequence is not followed, the sequence shall be recorded in the test report.

4.6 Inspection and assessment of results

Before and after completion of each test, carry out the inspection as specified, after using adjustment devices, if available.

Before any measurements are taken, the loaded extension shall be moved 10 times over the total extension length.

Record any changes that have taken place since the initial inspection. The inspection shall include at least the following:

- a) the fracture of any component or joint;
- b) the loosening of any joint intended to be rigid, which can be demonstrated by hand pressure;
- c) the deformation or wear of any part or component such that its functioning is impaired;
- d) the loosening of any means of fixing components;
- e) any impaired function of a component or part.

5 Test apparatus**5.1 Loading pad**

Rigid disc 100 mm in diameter (or 50 mm to be used in limited space), with a flat face and a 12 mm front edge blend radius.

5.2 Apparatus for slam-shut/open tests

Two examples for suitable apparatus as well as calibration instructions are given in Annex B.

5.3 Masses

Masses shall be designed so that they do not reinforce the structure or re-distribute the stresses.

5.4 Glass marbles


Marbles made of solid glass with 10 mm to 15 mm diameter. They shall be in a flexible bag large enough to allow them to move in the bag during the test.

In cases where the volume of the glass marbles is greater than the volume of the extension element, steel marbles shall be used. This shall be noted in the test report.

5.5 Loads for filing pockets

Suspended filing pockets shall be loaded with typing paper or an equivalent alternative as shown in Figure 1.

In cases where it is not possible to achieve the loading capacity with paper, the additional mass shall be steel and shall be positioned as the spacing material. This shall be noted in the test report.

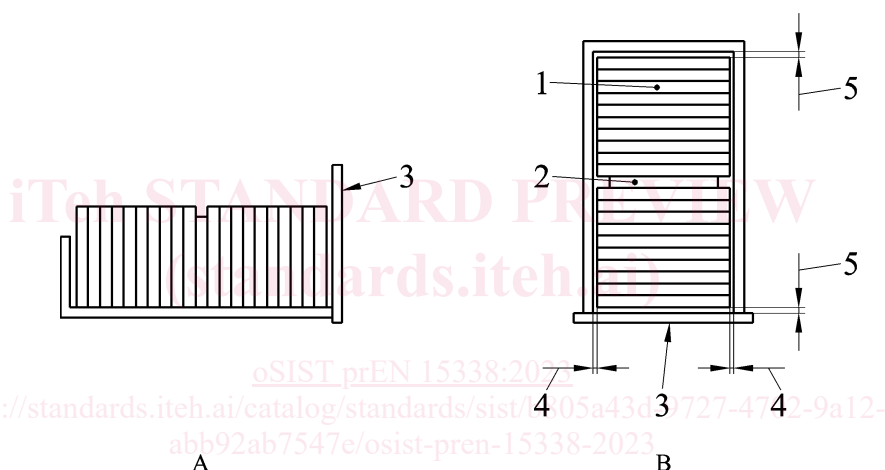

Key

- 1 typing paper
- 2 spacing material (for example polystyrene) in the middle of the extension element
- 3 front of extension element
- 4 air gap (will be determined by the size of the paper)
- 5 air gap (25 ± 6) mm
- A side view
- B top view

Figure 1 — Loading of suspended filing pockets with typing paper

5.6 Test frame and test drawer

The tests specified in 6.2 and 6.3 shall be carried out in a test frame (Figure 2, which is so constructed that the deformation under the applied load is no more than 1 mm).

Unless otherwise specified by the manufacturer, the extensions shall be mounted on particle board sides, see 5.7.

The distance between the outer surfaces of the particle board shall be specified by the manufacturer. If it is not specified, the distance (Figure 2, key 11) shall be (590 ± 10) mm.