
**Assistive products for blind and
vision-impaired persons — Tactile
walking surface indicators**

*Produits d'assistance pour personnes aveugles ou visuellement
affaiblies — Indicateurs tactiles de surfaces de marche*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 23599:2019](https://standards.iteh.ai/catalog/standards/sist/f7955b65-3c3b-4a77-b671-5fd3bfl3979/iso-23599-2019)

[https://standards.iteh.ai/catalog/standards/sist/f7955b65-3c3b-4a77-b671-
5fd3bfl3979/iso-23599-2019](https://standards.iteh.ai/catalog/standards/sist/f7955b65-3c3b-4a77-b671-5fd3bfl3979/iso-23599-2019)



iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 23599:2019

<https://standards.iteh.ai/catalog/standards/sist/f7955b65-3c3b-4a77-b671-5f1d3bfl3979/iso-23599-2019>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 General provisions	3
4.1 General principles.....	3
4.2 Detecting and distinguishing TWSIs.....	4
4.2.1 General.....	4
4.2.2 Tactile contrast.....	4
4.2.3 Visual contrast.....	4
4.2.4 Design for prevention of tripping.....	4
5 Requirements and recommendations	4
5.1 Specifications for shape and dimensions of TWSIs.....	4
5.1.1 General.....	4
5.1.2 Attention patterns.....	5
5.1.3 Guiding patterns.....	6
5.2 Surrounding or adjacent surfaces.....	10
5.3 Visual contrast.....	10
5.3.1 General.....	10
5.3.2 Luminance contrast.....	10
5.3.3 Calculation of the luminance contrast value.....	11
5.3.4 Maintenance of minimum luminance contrast.....	11
5.3.5 Measurement condition.....	11
5.3.6 Difference in colour or tone.....	11
5.3.7 Illumination.....	11
5.4 Materials.....	11
5.5 Installation.....	12
5.5.1 General.....	12
5.5.2 Principles for installation of TWSIs.....	12
5.5.3 Principles for installation of attention patterns.....	12
5.5.4 Principles for installation of guiding patterns.....	13
Annex A (informative) Luminance contrast	14
Annex B (informative) Examples of installations of TWSIs in specific situations	17
Bibliography	38

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 173 *Assistive products*.

This second edition cancels and replaces the first edition (ISO 23599:2012), of which it constitutes a minor revision. The changes compared to the previous edition are as follows:

- Correction of Weber's formula in Table A.1;
- Correction of Reference [18] in the Bibliography.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The purpose of this document is to create requirements for Tactile Walking Surface Indicators (TWSIs) for blind or vision-impaired persons.

When blind or vision-impaired persons travel alone, they might encounter problems and hazards in various situations. In order to obtain information for wayfinding, these pedestrians use information available from the natural and built environment, including tactual, acoustic and visual information. However, environmental information is not always reliable and it is for this reason that TWSIs perceived through use of a long white cane, through the soles of shoes and through the use of residual vision have been developed.

TWSIs were invented in Japan in 1965. They are now used around the world to help blind or vision-impaired persons travel independently. At present, TWSI patterns and installation methods vary from country to country. This document aims to provide a basis for a common approach for TWSIs at the international level, while acknowledging that some differences might be necessary at the local level to accommodate climatic, geographical, cultural or other issues that might exist.

TWSIs should be designed and installed based on a simple, logical and consistent layout. This will enable tactile indicators to facilitate not only the independent travel of blind or vision-impaired persons in places they frequently travel, but also to support their independent travel in places they visit for the first time.

Currently, there are several forms of TWSIs, but the ability to detect differences in tactile patterns through the soles of the shoes or the long white cane varies depending on individual differences. Therefore, the consolidated findings of science, technology and experience were employed to define the characteristics of TWSIs that can be detected and recognized by potential users. Additionally, in order to ensure that TWSIs achieve maximum effect in conveying information, it is important that they be installed in or on a smooth surface where blind or vision-impaired persons can identify them without interference from an irregular walking surface.

It is also necessary to ensure that TWSIs can be effectively used by vision-impaired persons as well as people who are blind. For this purpose, TWSIs should be easily detectable through use of residual vision. This is achieved through visual contrast between TWSIs and the surrounding or adjacent surface. Visual contrast is influenced primarily by luminance contrast, and secondarily by difference in colour or tone. In order to have good visibility, it is necessary to have sufficient illumination without glare and it is important to maintain the visual contrast between TWSIs and the surrounding or adjacent surface.

While TWSIs should be effective for blind or vision-impaired persons, attention should also be paid to their surface structure and materials in order to ensure that all pedestrians, including those with impaired mobility, can safely and effectively negotiate them.

TWSIs are installed in public facilities, buildings used by many people, railway stations and on sidewalks and other walking surfaces. Attention patterns may be installed in the vicinity of pedestrian crossings, at-grade kerbs, railway platforms, stairs, ramps, escalators, travelators, elevators, etc. Guiding patterns may be used alone or in combination with attention patterns in order to indicate the walking route from one place to another.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 23599:2019

<https://standards.iteh.ai/catalog/standards/sist/f7955b65-3c3b-4a77-b671-5fd3bf13979/iso-23599-2019>

Assistive products for blind and vision-impaired persons — Tactile walking surface indicators

1 Scope

This document provides product specifications for tactile walking surface indicators (TWSIs) and recommendations for their installation in order to assist in the safe and independent mobility of blind or vision-impaired persons.

This document specifies two types of TWSIs: attention patterns and guiding patterns. Both types can be used indoors and outdoors throughout the built environment where there are insufficient cues for wayfinding, or at specific hazards.

NOTE Some countries have adopted other designs of TWSIs based on the consolidated findings of science, technology and experience, ensuring that they can be detected and distinguished by most users.

This document is not intended to replace requirements and recommendations contained in such national standards, regulations or guidelines.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

3.1

attention pattern

TWSI (3.16) design, calling attention to a *hazard* (3.9) only, or to hazards and *decision points* (3.4)

Note 1 to entry: Attention patterns can be installed in the vicinity of pedestrian crossings, *at-grade kerbs* (3.2), railway platforms, stairs, ramps, escalators, travelators, elevators, etc.

3.2

at-grade kerb

flush kerb

kerb whereby the edge of the walkway is at the same level as adjoining vehicular ways

Note 1 to entry: See [Figures B.10](#) and [B.11](#).

3.3

CIE Y value

tristimulus value Y of the CIE 1931 standard colorimetric system for reflecting objects

Note 1 to entry: The CIE Y value equals the percentage value of the luminous reflectance.

Note 2 to entry: $Y = 0$ denotes the *reflectance* (3.15) of an absolutely black object (no light is reflected). $Y = 100$ denotes the reflectance of a perfectly white object (no light is absorbed or transmitted).

**3.4
decision point**

intersection or change of direction along a path of travel defined by *TWSIs* (3.16)

**3.5
discrete units**

individual domes, cones or elongated bars that are embedded into the ground or floor surfaces

**3.6
effective depth**

distance between the detectable edges of the *TWSIs* (3.16) when measured in the principal direction of travel

Note 1 to entry: See [Figure 1](#).

**3.7
effective width**

distance between the detectable edges of the *TWSIs* (3.16) when measured perpendicular to the principal direction of travel

Note 1 to entry: See [Figure 1](#) and [Figure 2](#).

**3.8
guiding pattern**

TWSI design, indicating a direction of travel or a landmark

Note 1 to entry: Guiding patterns can be used alone or in combination with *attention patterns* (3.1) in order to indicate the walking route from one place to another.

**3.9
hazard**

any area or element in, or adjacent to, a direction of travel, which potentially places people at risk of injury

**3.10
illuminance**

amount of luminous flux to a surface per unit area

Note 1 to entry: The SI unit for illuminance is lux (lx).

Note 2 to entry: See Reference [6] for further details.

**3.11
integrated units**

domes, cones or elongated bars on a base surface or plate, incorporated as a single unit

**3.12
luminance**

amount of light reflected or emitted from a surface in a given direction

Note 1 to entry: The SI unit for luminance is candela per square metre (cd/m²).

Note 2 to entry: See Reference [6] for further details.

**3.13
luminance contrast**

value of comparison of the *luminance* (3.12) of two surfaces

3.14**LRV****light reflectance value**

proportion of visible light reflected by a surface at all wavelengths and directions when illuminated by a light source

Note 1 to entry: LRV is also known as the luminance reflectance factor.

Note 2 to entry: LRV is expressed on a scale of 0 to 100, with a value of 0 points for pure black and a value of 100 points for pure white.

3.15**reflectance**

ratio of light reflected in a given direction by a surface

Note 1 to entry: See Reference [6] for further details.

3.16**TWSI****tactile walking surface indicator**

standardized walking surface used for information by blind or vision-impaired persons

3.17**truncated domes or cones**

type of *attention pattern* (3.1) also referred to as flat-topped domes or cones

iTeh STANDARD PREVIEW
(standards.iteh.ai)

4 General provisions**4.1 General principles**

ISO 23599:2019

Wayfinding and mobility can be achieved through good design of facilities, including clear accessible paths of travel with built and natural guiding elements, such as edges and surfaces that can be followed tactually and visually. TWSIs should not be a substitute for poor design.

TWSIs shall be installed where no built or natural guiding elements can be provided.

Though TWSIs are used by blind or vision-impaired persons, the design and installation of TWSIs shall take into consideration the needs of people with mobility impairments.

All TWSIs shall

- be easily detectable from the surrounding or adjacent surface by raised tactile profiles and visual contrast,
- maintain detectability throughout their lives,
- be designed to prevent tripping,
- be slip-resistant,
- be used in a logical and sequential manner,
- be installed consistently to enable them to be interpreted by users, and
- be of sufficient depth in the direction of travel to provide adequate detectability and appropriate response by the users, such as stopping and turning.

Attention TWSIs shall

- a) be distinguishable from guiding TWSIs, and

- b) extend across the full width of an accessible path of travel and perpendicular to the direction of travel when approaching a hazard.

4.2 Detecting and distinguishing TWSIs

4.2.1 General

TWSIs shall be easily detectable from the surrounding or adjacent surface by raised tactile profiles and visual contrast. TWSIs shall be distinguishable from each other.

4.2.2 Tactile contrast

TWSIs shall be detectable by blind or vision-impaired persons through the soles of their shoes and by a long white cane.

When attention patterns and guiding patterns are combined, blind or vision-impaired persons shall be able to distinguish clearly between them, identify both and remember the meaning of each one.

Surrounding or adjacent surfaces shall be smooth to enable TWSIs to be detected and distinguished (see [5.2](#)).

4.2.3 Visual contrast

TWSIs shall be readily detectable and distinguishable from the surrounding or adjacent surfaces by visually impaired people. Perception of visual contrast is enhanced by high illumination (see [5.3](#) and [Annex A](#)).

4.2.4 Design for prevention of tripping

Truncated domes or cones and elongated bars shall have bevelled or rounded edges to decrease the likelihood of tripping and to enhance safety and negotiability for people with mobility impairments.

5 Requirements and recommendations

5.1 Specifications for shape and dimensions of TWSIs


5.1.1 General

TWSIs shall be easily detectable from the surrounding or adjacent surface by raised tactile profiles. This can be achieved by conforming to the shape and dimensions specified below.

5.1.2 Attention patterns

5.1.2.1 Arrangements

Truncated domes or cones should be arranged in a square grid, parallel or diagonal at 45° to the principal direction of travel (see [Figure 1](#)).

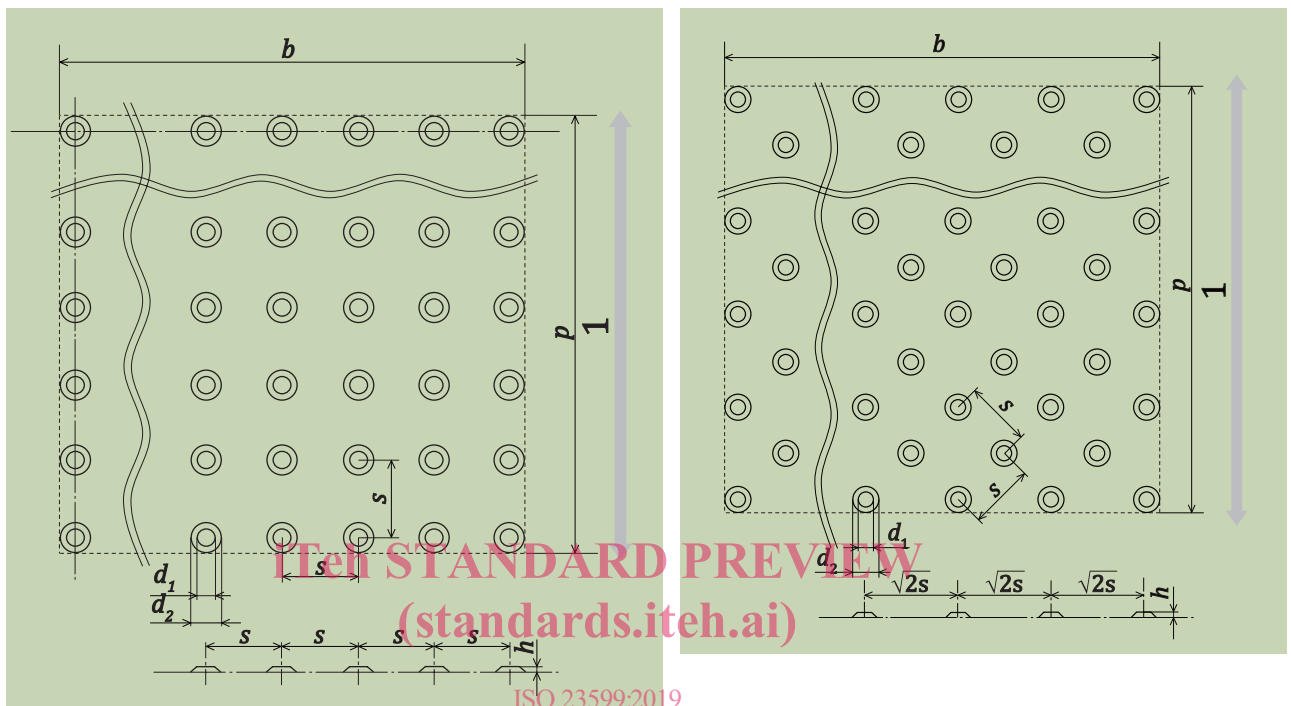

a) Parallel to the principal direction of travel b) Diagonal at 45° to the principal direction of travel

Key

- 1 principal direction of travel
- s spacing between the centres of adjacent truncated domes or cones
- d_1 top diameter of truncated domes or cones
- d_2 bottom diameter of truncated domes or cones
- h height of truncated domes or cones
- b effective width
- p effective depth

Figure 1 — Spacing and dimensions of truncated domes or cones

5.1.2.2 Height

The height of truncated domes or cones shall be 4 mm to 5 mm (see [Figure 1](#)).

In indoor environments with exceptionally smooth surfaces, the minimum height of 4 mm might be preferable.

NOTE When truncated domes or cones are surrounded by exceptionally smooth surfaces, such as terrazzo, plastic or rubber, they can be detected more easily than when they are surrounded by rougher surfaces, such as brushed concrete, bricks or manufactured pavers. A height that is more than what is necessary for reliable detection can cause tripping.

5.1.2.3 Diameter

The top diameter of truncated domes or cones shall range from 12 mm to 25 mm, as shown in [Table 1](#), and the bottom diameter of truncated domes or cones shall be (10 ± 1) mm greater than the top diameter (see [Figure 1](#)).

NOTE Systematic research[32][33] carried out on truncated domes or cones of various dimensions indicates that a top diameter of 12 mm is the optimal size for blind or vision-impaired persons to detect and distinguish through the soles of their shoes. Experiences indicate that the optimal top diameter for other groups within the community could be greater.

5.1.2.4 Spacing

The spacing refers to the shortest distance between the centres of two adjacent truncated domes or cones which can be parallel or diagonal at 45° to the direction of travel. The spacing shall be within the ranges shown in relation to the top diameter in [Table 1](#). The tolerance of the top diameter shall be ± 1 mm.

Table 1 — Top diameter and corresponding spacing of truncated domes or cones

Top diameter of truncated domes or cones mm	Spacing mm
12	42 to 61
15	45 to 63
18	48 to 65
20	50 to 68
25	55 to 70

iTeh STANDARD PREVIEW
(standards.iteh.ai)


ISO 23599:2019

5.1.3 Guiding patterns <https://standards.iteh.ai/catalog/standards/sist/f7955b65-3c3b-4a77-b671-5f1d3bf13979/iso-23599-2019>

5.1.3.1 Arrangements

A guiding pattern shall be constructed of parallel flat-topped elongated bars (see [Figure 2](#)) or sinusoidal ribs (see [Figure 3](#)).

NOTE Flat-topped elongated bars are the most commonly used guiding pattern, though sinusoidal rib patterns are used in geographic areas where snow is common. Sinusoidal patterns are less easily damaged by snow ploughs than flat-topped bars.

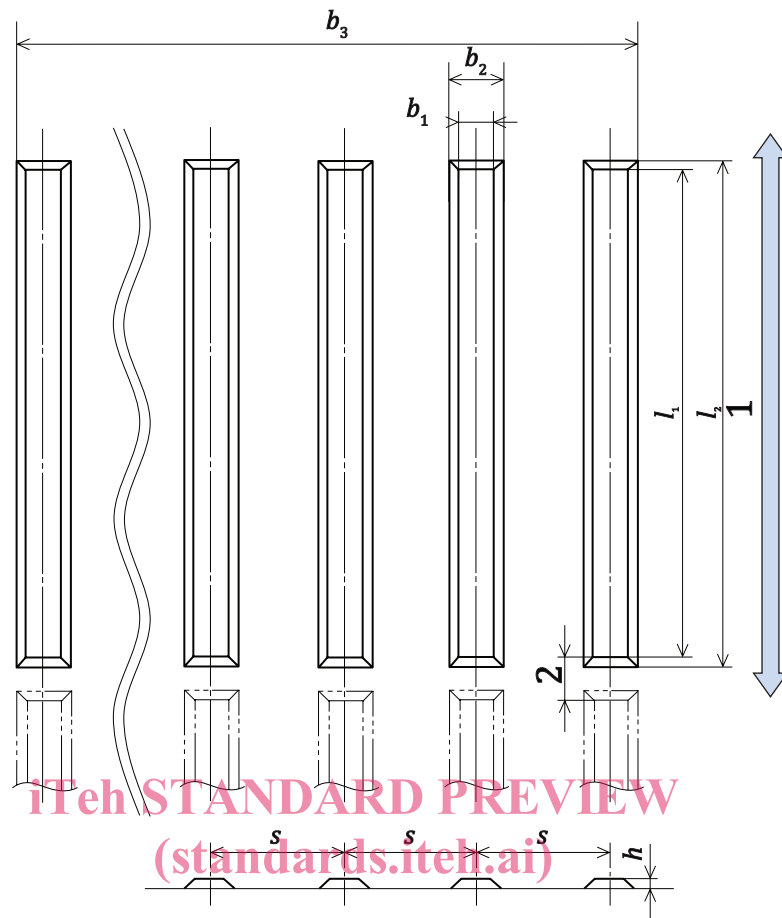

ISO 23599:2019

Key

- <https://standards.itech.ai/catalog/standards/sist/f7955b65-3c3b-4a77-b671-5f1d3bfl3979/iso-23599-2019>
- 1 principal direction of travel
 - 2 drainage gap between the top of flat-topped elongated bars
 - b_1 top width of flat-topped elongated bars
 - b_2 bottom width of flat-topped elongated bars
 - s spacing between the axes of adjacent flat-topped elongated bars
 - h height of flat-topped elongated bars
 - l_1 length of the top of flat-topped elongated bars
 - l_2 length of the base of flat-topped elongated bars
 - b_3 effective width

Figure 2 — Spacing and dimensions of flat-topped elongated bars