

DRAFT INTERNATIONAL STANDARD

ISO/DIS 23693-1

ISO/TC 92/SC 2

Secretariat: ANSI

Voting begins on:
2019-06-20

Voting terminates on:
2019-09-12

Determination of the resistance to gas explosions of passive fire protection materials —

Part 1: General Requirements

ICS: 13.220.50

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/DIS 23693-1](#)

<https://standards.iteh.ai/catalog/standards/sist/5e9e4658-a093-4c2b-9a7c-b8b04b5184a8/iso-dis-23693-1>

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

This document is circulated as received from the committee secretariat.



Reference number
ISO/DIS 23693-1:2019(E)

© ISO 2019

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/DIS 23693-1

<https://standards.iteh.ai/catalog/standards/sist/5e9e4658-a093-4c2b-9a7c-b8b04b5184a8/iso-dis-23693-1>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
1 Scope	1
2 Terms and definitions	1
3 Symbols (and abbreviated terms)	1
4 Explosion Loading	1
4.1 Overpressure loading	1
4.1.1 Finite rise time	1
4.1.2 Instantaneous Rise Time	2
4.2 Drag loading	3
4.3 Means of generating loads	3
4.3.1 Confined Gas explosion	3
4.3.2 Unconfined gas explosion	3
4.3.3 Shock tube	3
4.3.4 Solid Explosive detonations	3
5 Test Specimens	3
6 Environmental conditions	4
7 Instrumentation	4
7.1 Pressure transducers	4
7.2 Temperature	4
7.3 Deflection	4
7.4 Strain	4
7.5 Data Acquisition	4
7.6 Photography	5
7.7 Video	5
8 Test Specification	5
9 Data analysis	5
10 Test acceptability criteria	6
11 Test Report	6
Bibliography	8

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

The committee responsible for this document is ISO/TC 92, *Fire safety*, Subcommittee SC 2, *Fire containment*.

ISO/DIS 23693-1

<https://standards.iteh.ai/catalog/standards/sist/5e9e4658-a093-4c2b-9a7c-b8b04b5184a8/iso-dis-23693-1>

Determination of the resistance to gas explosions of passive fire protection materials —

Part 1: General Requirements

1 Scope

This standard aims to simulate the mechanical loads that could be imparted to passive fire protection (PFP) materials and systems by explosions resulting from releases of flammable gas, pressurised liquefied gas or flashing liquid fuels that may precede a fire. This standard may also be applicable to dust explosions. Gas explosions can give rise to pressure and drag forces. Damage to PFP materials in a gas explosion can be caused by the direct effects of pressure and drag loadings and by the deflection of the substrate supporting the PFP material. Other parts of this standard will deal with a range of common types of specimen that could be tested against the mechanical loads generated.

2 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

2.1

Drag loads

Loads on items resulting from the flow of gas generated by a venting gas explosion

2.2

Impulse

The area under a pressure-time history curve

2.3

Overpressure

The rise in pressure above ambient

2.4

Rise time

The time for the pressure in a blast wave to rise to the peak pressure

3 Symbols (and abbreviated terms)

To be added as necessary


4 Explosion Loading

4.1 Overpressure loading

Overpressure loadings shall be characterised as one of two idealised overpressure-time histories that can occur.

4.1.1 Finite rise time

The type of loading that would occur to items close to or inside a gas cloud. Its characteristics are defined by a peak overpressure, minimum rise time and impulse, as shown in Figure 1.

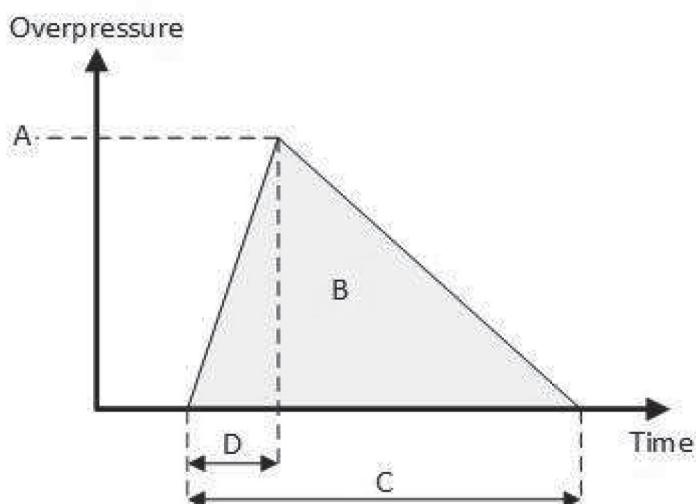


Key

- A – Peak overpressure
- B – Impulse
- C – Duration
- D – Rise time

iTeh STANDARD PREVIEW
 (standards.iteh.ai)

4.1.2 Instantaneous Rise Time

Shock loading that can occur in the far field of a gas explosion. Its characteristics are defined by peak overpressure and impulse, see Figure 2. <https://standards.iteh.ai/catalog/standards/sis/9c9c4050-a093-4c2b-9af0-b8b04b5184a8/iso-dis-23693-1>

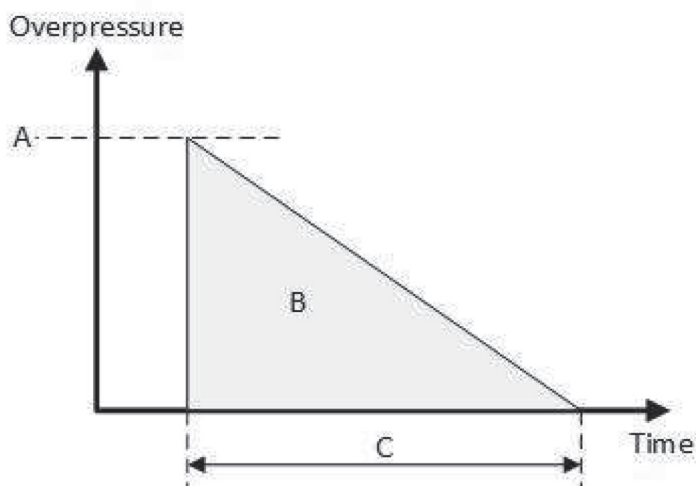

Key

- A – Peak overpressure
- B – Impulse
- C – Duration

Figure 2

NOTE These idealised loadings only consider the positive phase loading resulting from a gas explosion, the negative (rarefaction) phase has not been considered. The magnitude and duration of the negative phase will be dependent on the method used to generate the required overpressure-time history.

4.2 Drag loading

PFM materials and systems required to demonstrate resistance to drag loads shall be subject to a drag loading in addition to the test overpressure loading. The drag loading shall be defined as a peak load and optionally a duration. Further details of how the drag loading can be demonstrated on specific configurations of specimen are given in the subsequent parts to this standard.

Direct measurement of drag loading is currently impractical and simulation using methods such as Computational Fluid Dynamics is likely to be required to allow drag loading to be inferred from other measurements.

4.3 Means of generating loads

The required overpressure-time history shall be generated in one of the following ways:

4.3.1 Confined Gas explosion

The overpressure-time history is generated by ignition of flammable gas/air mixtures within a confining structure. The overpressure-time history required would be generated by a combination of confinement and congestion. The location of the sample within or outside the confinement would also affect the overpressure-time history. In addition to overpressure loading, specimens located in the vent path of a confined gas explosion will be exposed to significant drag loads.

4.3.2 Unconfined gas explosion

The overpressure-time history is generated by congestion within the flammable gas cloud. The geometry of the congestion would produce the required overpressure-time history. The location of the sample within or outside the cloud would also affect the overpressure-time history. Samples located close to or within the cloud would be exposed to drag loading.

4.3.3 Shock tube

Normally limited to overpressure-time histories with instantaneous pressure rises.

4.3.4 Solid Explosive detonations

Limited to overpressure-time histories with instantaneous pressure rises.

Note The potential duration of the overpressure is limited by the charge size so to generate overpressure-time histories similar to those expected from gas explosions would require very large charge sizes.

5 Test Specimens

This procedure may be used to test any practical configuration of test specimen. The common types of test specimens that can be part of PFM systems are as follows:

1. Divisional elements
2. Structural sections
3. Pipework and fittings
4. Cable, duct and pipe penetration seals
5. Windows and doors

Further information on specific configuration, installation and instrumentation will be provided in subsequent parts to this standard.

6 Environmental conditions

The ambient temperature shall be recorded immediately prior to the test. When a sample is mounted inside a test chamber the ambient conditions shall be measured inside the test chamber. The ambient humidity shall be recorded immediately prior to the test within the vicinity of the test facility.

7 Instrumentation

The test shall have sufficient and appropriate instrumentation to provide measurements that demonstrate that the performance requirements of the specimen are met.

7.1 Pressure transducers

The overpressure shall be measured using a minimum of 3 pressure transducers.

All pressure transducers shall be positioned to measure an overpressure representative of the loading on the test specimens.

The pressure transducers shall have a minimum natural frequency of 200 kHz.

Calibration records shall be maintained that demonstrate that the pressure measuring equipment used can measure pressure within an accuracy of $\pm 5\%$ of the require peak overpressure scale.

7.2 Temperature

FPF materials and systems required to demonstrate performance in specific temperature ranges shall be instrumented with thermocouples that allow the temperature of the sample at the time of test to be reported.

The thermocouples shall be logged for a minimum period of 100 seconds before the test at a minimum sampling frequency of 1 Hz.

The thermocouples and data acquisition system to be used shall be able to demonstrate an accuracy of $\pm 3^\circ\text{C}$.

7.3 Deflection

The dynamic deflection of a sample may be measured using a range of techniques. Any techniques used shall be capable of demonstrating an accuracy of $\pm 5\%$ of the maximum deflection being measured.

Any permanent deflection of a specimen shall be measured after the test using a measurement technique that can demonstrate an accuracy of $\pm 5\%$ of the maximum deflection being measured.

7.4 Strain

Where appropriate, strain gauges shall be used to measure the response of a sample. Where used, strain gauges shall be of the appropriate type and installed in areas expected to be subject to maximum strain.

7.5 Data Acquisition

The data acquisition system shall consist of a recording system with a sufficient number of channels to accommodate all pressure transducers and any other instruments. The minimum sampling frequency should be 100 kHz unless otherwise stated. No additional pre-filtering shall be used. The data acquisition system shall be set to sample all transducers simultaneously or in rapid burst mode.

7.6 Photography

Photographs shall be taken of the samples prior to the test and after the test. Photography shall show details of damage, joints, fixings, supports, and all other relevant features necessary to record the condition of the specimen before testing and any changes the specimen has undergone during the test.

7.7 Video

Where appropriate, video footage, particularly high speed video, shall be used. It can be valuable in assessing the response of specimens under test, particularly those mounted externally.

8 Test Specification

The test sponsor shall define the overpressure-time history to be tested to in terms of an idealised overpressure-time history as given in [section 4.2](#). As a minimum, the peak overpressure, impulse and minimum rise time shall be specified.

The test sponsor shall specify all additional performance requirements that need to be demonstrated and any preconditioning of the specimen that has been, or needs to be, carried out.

NOTE In some situations the test sponsor should obtain guidance in specifying the test conditions. In those cases it is necessary for the test sponsor to provide details of the operating environment for the material being tested.

9 Data analysis

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Overpressure time histories with a duration of 5 ms or greater shall have a 0.5 ms rolling average applied to each signal.

ISO/DIS 23693-1

For each time step of the recorded data, the average overpressure over the time period starting 0.25 ms before, and finishing 0.25 ms after this time point is assigned to that time. This process produces a 0.5 ms rolling average and has the effect of smoothing the overpressure trace.

The duration of the overpressure profile shall be determined by considering an idealised overpressure profile in the form of a triangle. The apex of this triangle corresponds to the magnitude and time of the maximum overpressure determined from the 0.5ms rolling average. The sides of the triangle are formed by lines from this point to the two positions on the actual overpressure profile where the pressure trace passes 10 % of the maximum overpressure.

Overpressure time histories with a duration of less than 5 ms shall have a 0.05 ms rolling average applied to each signal.

For each time step of the recorded data, the average overpressure over the time period starting 0.025 ms before, and finishing 0.025 ms after this time point is assigned to that time. This process produces a 0.05 ms rolling average and has the effect of smoothing the overpressure trace.

The duration of the overpressure profile shall be determined by considering an idealised overpressure profile in the form of a triangle. The apex of this triangle corresponds to the magnitude and time of the maximum overpressure determined from the 0.05 ms rolling average. The sides of the triangle are formed by lines from this point to the two positions on the actual overpressure profile where the pressure trace passes 10 % of the maximum overpressure.

NOTE: This process is undertaken because there is the potential for short duration (e.g. <1 ms) variations in the overpressure measurements giving misleading representations of the overpressures recorded. Short duration variations are unlikely to have any importance in terms of structural response and are also unlikely to be represented in any model prediction.

The rise time of the overpressure shall be calculated from the idealised triangular overpressure profile.