

# INTERNATIONAL STANDARD

**ISO**  
**2709**

Third edition  
1996-08-15

---

---

## Information and documentation — Format for information exchange

**iTeh STANDARD PREVIEW**

*Information et documentation — Format pour l'échange d'information*  
**(standards.iteh.ai)**

SIST ISO 2709:2005

<https://standards.iteh.ai/catalog/standards/sist/ed6585d0-b598-4997-80f5-b5e4a48863f4/sist-iso-2709-2005>



Numéro de référence  
ISO 2709:1996(E)

## Contents

Page

1	Scope .....	1
2	Normative references .....	1
3	Definitions .....	1
4	Structure of communication format for record .....	2
4.1	Record label .....	2
4.2	Directory .....	3
4.3	Fields .....	3

## Annex

A	Bibliography .....	6
---	--------------------	---

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST ISO 2709:2005](https://standards.iteh.ai/catalog/standards/sist/ed6585d0-b598-4997-80f5-b5e4a48863f4/sist-iso-2709-2005)

<https://standards.iteh.ai/catalog/standards/sist/ed6585d0-b598-4997-80f5-b5e4a48863f4/sist-iso-2709-2005>

© ISO 1996

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization  
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

**iTeh STANDARD PREVIEW**  
International Standard ISO 2709 was developed by Technical Committee ISO/TC 46, *Information and documentation*, Subcommittee SC 4, *Computer applications in information and documentation*.

This third edition cancels and replaces the second edition (ISO 2709:1981), of which it constitutes a technical revision.  
<https://standards.iteh.ai/catalog/standards/sist/ed6585d0-b598-4997-80f5-b5c44841215c/iso-2709-1996>

Annex A of this International Standard is for information only.

**iTeh STANDARD PREVIEW**  
This page intentionally left blank  
**(standards.iteh.ai)**

SIST ISO 2709:2005

<https://standards.iteh.ai/catalog/standards/sist/ed6585d0-b598-4997-80f5-b5e4a48863f4/sist-iso-2709-2005>

# Information and documentation — Format for information exchange

## 1 Scope

This International Standard specifies the requirements for a generalized exchange format which will hold records describing all forms of material capable of bibliographic description as well as other types of records. It does not define the length or the content of individual records and does not assign any meaning to tags, indicators or identifiers, these specifications being the functions of an implementation format.

This International Standard describes a generalized structure, a framework designed specially for communications between data processing systems and not for use as a processing format within systems.

## 2 Normative references

The following standards contains provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO/IEC 646:1991, *Information technology — ISO 7-bit coded character set for information interchange*.

ISO/IEC 10646-1:1993, *Information technology — Universal Multiple-Octet Coded Character Set (UCS) — Part 1: Architecture and Basic Multilingual Plane*.

## 3 Definitions

For the purposes of this International Standard the following definitions apply. They are listed in the order corresponding to figure 2.

**3.1 record:** Collection of fields, including a record label, a directory and data.

NOTE 1 If required, linking of records and their division into subrecords is allowed, which should be implemented as specified in the explicit exchange format.

**3.2 field:** Variable length portion of the record containing a particular category of data, following the directory and associated with one entry of the directory.

NOTE 2 A field may contain one or more subfields.

**3.3 (subfield) identifier:** Data element of one or more characters immediately preceding and identifying a subfield.

**3.4 indicator:** First data element, if present, associated with a field supplying further information about the contents of the field, about the relationship between the field and other fields in the record, or about the action required in certain data manipulation processes.

**3.5 directory:** Index to the location of the fields within a record.

**3.6 record label:** Field occurring at the beginning of each record providing parameters for the processing of the record.

**3.7 directory map:** Set of parameters specifying the structure of the entries in the directory.

**3.8 separating character:** Control character used to separate and qualify units of data logically, and in some cases hierarchically.

**3.9 subfield:** Part of a field containing a defined unit of information.

**3.10 subrecord:** Group of fields within a record which may be treated as an entity.

**3.11 structure:** Arrangement of the parts constituting a record.

**3.12 (field) tag:** Three characters associated with a field and used to identify it.

## 4 Structure of communication format for record

The general structure of a record is shown schematically in figure 1. A more detailed structure is shown schematically in figure 2, which includes four alternatives for the data fields.

Record label
Directory
Fields
Record separator

**Figure 1 — General structure**

A record contains the following fixed and variable length fields in the sequence shown in figure 2:

- a) a record label (fixed length);
- b) a directory (variable length);
- c) record identifier (variable length);
- d) reference fields (variable length);
- e) data fields (variable length);
- f) field separator(s), i.e. separator IS2 of ISO/IEC 646 or ISO/IEC 10646;
- g) record separator, i.e. separator IS3 of ISO/IEC 646 or ISO/IEC 10646.

The directory, record identifier, reference fields and data fields is terminated by a field separator. The record is terminated by the record separator.

### 4.1 Record label

The record label shown in figure 2 is fixed in length and defined as follows.

#### 4.1.1 Record length (character positions 0 to 4)

The number of character positions in the record including the record label, directory, fields, and the record separator. The length is a 5-digit decimal number, right-aligned with zero fill if necessary.

NOTE 3 The record length described here is a logical record length. For practical reasons relating to machine processing of data in the magnetic tape environment, it can be necessary to divide the information into blocks.

#### 4.1.2 Record status (character position 5)

A single character, to be defined in an implementation International Standard, describing the status of a record, for example, new or amended.

In the absence of an International Standard, special agreement shall be reached between the interchange partners.

#### 4.1.3 Implementation codes (character positions 6 to 9)

The codes are not defined in this International Standard. Special agreement shall be reached between the interchange partners

#### 4.1.4 Indicator length (character position 10)

One decimal digit giving the number of character positions of the indicators.

If indicators are not used, the indicator length is set to zero.

#### 4.1.5 Identifier length (character position 11)

One decimal digit giving the number of character positions of the identifier. The first or only character of this identifier shall always be IS1 of ISO/IEC 646 or ISO/IEC 10646.

If the identifier is not used, the identifier length is set to zero.

#### 4.1.6 Base address of data (character position 12 to 16)

Five decimal digits, right-aligned with zero fill if necessary, equal to the combined length in characters of the record label and the directory including the field separator at the end of the directory.

#### 4.1.7 Defined by user systems (character positions 17 to 19)

These positions are defined by user systems.

#### 4.1.8 Directory map

**Character position 20:** One decimal digit equal to the length in characters of the length of field part of each entry in the directory.

**Character position 21:** One decimal digit equal to the length in characters of the starting character position part of each entry in the directory.

**Character position 22:** One decimal digit equal to the length in characters of the implementation-defined part of each entry in the directory.

**Character position 23:** Reserved for future use.

## 4.2 Directory

The directory consists of a variable number of entries each corresponding to its respective field (record identifier, reference and data fields). The directory ends with a field separator.

### 4.2.1 Directory entry

An entry consists of the following parts in the given order:

- a) a tag;
- b) the length of field;
- c) starting character position;
- d) implementation-defined part.

The length of the tag is three characters. No part of the entry shall exceed nine characters in length. All entries in a directory shall have the same structure.

### 4.2.2 Tag

Three characters which specify, according to definition in an implementation International Standard, the name of any associated field.

In the absence of an International Standard, special agreement shall be reached between the interchange partners.

### 4.2.3 Length of field

This length is either:

- a) the total number of characters [including indicator(s) and field separator] in the field indicated by the preceding tag; or

- b) zero, implying that the directory entry refers to a field whose total length is greater than the largest decimal number ( $n$ ) which can be stored in the "length" of a directory entry. In this case, the field is regarded as being divided into a number of parts of which all but the last are of equal length ( $n$ ). Each part has a corresponding directory entry containing the tag for the field and the starting character position of the part to which the directory entry refers. A length of zero indicates that the directory entry refers to a part of the field which is not the final part and that the length of this part is to be taken as ( $n$ ); or
- c) the number of characters (including field separator) in the final part of a field which has been treated as described in b).

In the cases described in b) and c), all directory entries which refer to parts of the same field shall be adjacent and in sequence.

### 4.2.4 Starting character position

A decimal number giving the position of the first character of the field identified by the preceding tag, relative to the base address of data [i.e. the starting character position of the first field following the directory is 0 (zero)].

### 4.2.5 Implementation-defined part

The implementation-defined part of the entry, if present, contains control information relative to the field referenced by the entry.

## 4.3 Fields

All fields shall end with a field separator.

There are three types of field:

- a) record identifier field: tag 001<sup>1)</sup>;
- b) reference fields: tags 002 to 009 and 0AA to 00Z<sup>2)</sup> as required;
- c) data fields: tags 010 to 999 and 0AA to ZZZ as required.<sup>2) 3)</sup>

1) 0 signifies zero.

2) For alphabetic characters, use either capital or small letters.

3) Any combination of numeric and alphabetic characters is allowed. When alphanumeric tags are used, they must not start with 00 since only reference fields start with two zeros.

### 4.3.1 Record identifier field

Characters identifying the record and assigned by the organization creating the record.

NOTE 4 The record identifier field does not contain indicators or identifiers.

### 4.3.2 Reference fields

A reference field supplies data which may be required for the processing of the record.

NOTE 5 Reference fields do not contain indicators or identifiers.

### 4.3.3 Data fields

Each field consists of indicator(s) (optional), identifier(s) (optional), data and a field separator. The presence and length of the indicator(s) or identifier(s) are determined by the indicator length and identifier length as defined in the record label and shall be used consistently within each data field of the record.

Each data field in a record shall therefore be constructed according to one of the following alternatives.

- a) **data:** In this case, the indicator length and the identifier length in the record label are set to zero. See figure 2, alternative 1.
- b) **identifier and data:** In this case, the indicator length in the record label is set to zero and the identifier length is set to one or more. See figure 2, alternative 2.
- c) **indicator and data:** In this case, the indicator length in the record label is set to one or more and the identifier length is set to zero. See figure 2, alternative 3.
- d) **indicator, identifier and data:** In this case, the indicator length and the identifier length in the record label are set to one or more. See figure 2, alternative 4.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST ISO 2709:2005

<https://standards.iteh.ai/catalog/standards/sist/ed6585d0-b598-4997-80f5-b5e4a48863f4/sist-iso-2709-2005>



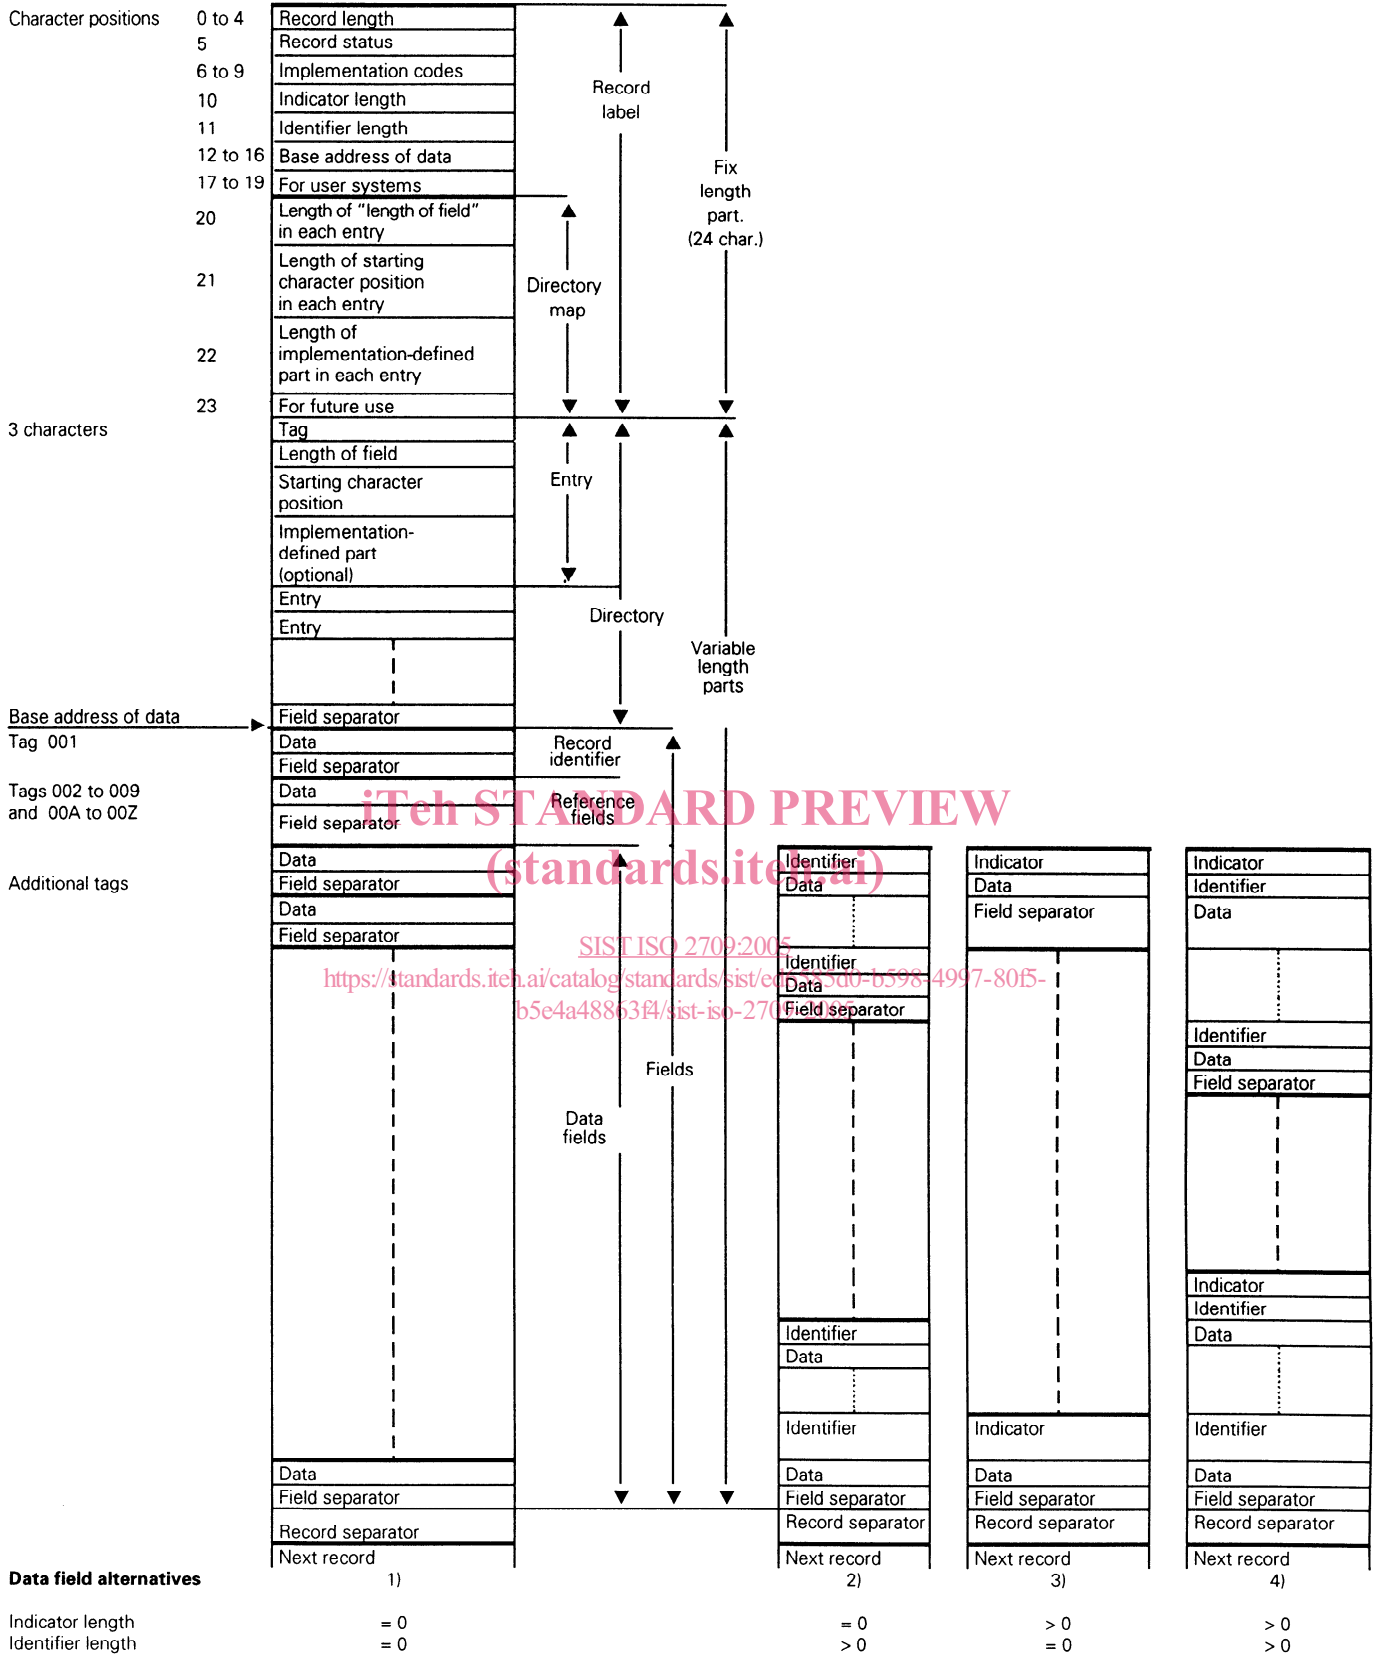


Figure 2 — Detailed record structure