



**International
Standard**

ISO 21622-3

**Irrigation techniques — Remote
monitoring and control for
irrigation —**

**Part 3:
Interoperability**

**First edition
2024-03**

iTeh Standards
(<https://standards.itih.ai>)
Document Preview

[ISO 21622-3:2024](https://standards.itih.ai/catalog/standards/iso/f57a884e-cf88-4273-af73-39a5ce4b0a12/iso-21622-3-2024)

<https://standards.itih.ai/catalog/standards/iso/f57a884e-cf88-4273-af73-39a5ce4b0a12/iso-21622-3-2024>

iTeh Standards
(<https://standards.itih.ai>)
Document Preview

[ISO 21622-3:2024](https://standards.itih.ai/catalog/standards/iso/f57a884e-cf88-4273-af73-39a5ce4b0a12/iso-21622-3-2024)

<https://standards.itih.ai/catalog/standards/iso/f57a884e-cf88-4273-af73-39a5ce4b0a12/iso-21622-3-2024>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2024

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents	Page
Foreword.....	vi
Introduction.....	vi
1 Scope	1
2 Normative reference	1
3 Terms and definitions.....	2
4 Interoperability I: System architecture.....	4
4.1 Levels and components of an interoperable architecture.....	4
4.2 Interface specifications	6
5 Interoperability II: exchange of data from irrigation entities.....	20
5.1 General outline	20
5.2 Static data of the irrigation entities	20
5.3 Structure of an irrigation entity identifier (EntityID)	28
5.4 Properties.....	28
5.5 Entity events.....	35
6 Interoperability III: Exchange of data from procedural elements performed in irrigation entities	37
6.1 General outline	37
6.2 Statuses and actions	37
6.3 Types of Operation recipes	37
6.4 Types of Unit Procedure recipes	56
6.5 Types of Procedure recipes	58
6.6 Report.....	59
6.7 Procedural element events	62
Annex A (normative) Management interface with SOAP 1.2	64
A.1 Overview.....	64
A.2 Requirements.....	64
A.3 Implementation classes for web services.....	66
A.4 Implementation classes for authorization server	87
A.5 WSDL	88
Annex B (normative) Subsystem interface with SOAP 1.2	104
B.1 Overview.....	104
B.2 Requirements.....	104
B.3 Implementation classes for web services.....	106
B.4 Implementation classes for authorization server	121
B.5 WSDL	122
Annex C (normative) Event interface with SOAP 1.2	135
C.1 Overview	135
C.2 Requirements.....	135
C.3 Implementation classes for web services	137
C.4 Implementation classes for authorization server	140
C.5 WSDL	140
Annex D (informative) Interoperability test protocol.....	144
D.1 Overview	144
D.2 General description	144
D.3 IT infrastructure	145

D.4	Test bed description	146
D.5	Test procedure	148
D.6	Tests over subsystems.....	151
D.7	Tests over coordination brokers.....	235
D.8	Tests over management information systems	243
D.9	Tests report.....	245
Annex E (informative) Coordination broker software requirement specifications		247
E.1	Overview	247
E.2	Data model.....	249
E.3	Minimal functions — Coordination broker	255
E.4	Desirable functions	259
E.5	Specific requirements.....	267
E.6	Request management.....	285
E.7	Cases of use.....	294
Annex F (normative) Management interface with REST		295
F.1	Overview	295
F.2	Requirements	295
F.3	Implementation method for web services	297
F.4	ComplexType definition	307
F.5	Implementation methods for authorization	321
F.6	WADL	322
F.7	ComplexTypeF.....	325
Annex G (normative) Subsystem interface with REST		334
G.1	Overview	334
G.2	Requirements	334
G.3	Implementation method for web services	336
G.4	ComplexType definition	342
G.5	Implementation methods for authorization	353
G.6	WADL	354
G.7	ComplexTypeG	356
Annex H (normative) Event interface with REST		363
H.1	Overview	363
H.2	Requirements	363
H.3	Implementation methods for web services — NewEvent method	364
H.4	ComplexType definition	365
H.5	Implementation methods for authorization	368
H.6	WADL	369
H.7	ComplexTypeH	370
Bibliography.....		371

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

ISO draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at www.iso.org/patents. ISO shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 23, *Tractors and machinery for agriculture and forestry*, Subcommittee SC 18, *Irrigation and drainage equipment and systems*.

A list of all parts in the ISO 21622 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The purpose of this document is to allow interoperability between the different elements of an irrigation system that exist side by side in the same installation. The introduction of a standard in irrigation control systems will lead to improvements in irrigation programming practice and establish a clear separation between decision making and decision implementation.

This document establishes the specification and location of communication interfaces to be implemented in order to enable the data exchange on commercial products, as well as its integration in an interoperable architecture.

This document defines the mechanisms to exchange and integrate data from remote monitoring and control systems (RMCS) for irrigation, making it available to any management information system (MIS) with permissions.

A manufacturer can adopt this document in all the described levels or specifically in one of them, implementing only the specifications of application to its product.

- The application of this document to a subsystem (RMCS) involves:
 - a) the implementation of the architecture defined at Clause 4, including the subsystem and the event interfaces, exclusively with the actions supported by this subsystem. Clauses 5 and 6 are related to the kinds of irrigation entities that can be controlled and/or monitored. Its data will be available to any consumer with permissions that implements the defined interface.
 - b) the implementation of one of the proposed technologies for the subsystem and the event interfaces. The available implementations are described in the Annexes B or G for subsystem interface, and Annexes C or H for event interface. The developer can use any of these sets (Annexes B and C, or Annexes G and H) to implement this document. The implementation can be validated using the tests for subsystems, included in the Annex D.
- The application of this document to a management information system (MIS) involves:
 - a) the implementation of the architecture defined at Clause 4, including the management interface, exclusively with the actions supported by this MIS. To access data from a subsystem the MIS requires permissions.
 - b) the implementation of one of the proposed technologies for the management interface. The available implementations are described in the Annexes A or F. The developer can use any of the two to implement the standard. The implementation can be validated using the tests for MIS, included in the Annex D.
- The application of this document to a coordination broker involves:
 - a) the implementation of the architecture defined at Clause 4 and all its interfaces.
 - b) the implementation of the interfaces performed using all the technologies used in the implementation annexes (Annexes A, B, C, F, G and H). The implementations can be validated using the tests for coordination brokers, included in the Annex D.
 - c) Annex E, defines two sets of functionalities for the development of a coordination broker.

Irrigation techniques — Remote monitoring and control for irrigation systems —

Part 3: Interoperability

1 Scope

This document establishes requirements for interoperability among systems developed for management and/or control of irrigation facilities. It can be applied under any technological platform and irrigation system, regardless of the water management scheme, with the exception of irrigation mobile machinery, including centre pivots and linear irrigation machines. Due to the dynamic nature of these machines, associated control systems and specific safety requirements, the applicability of exchangeable data for irrigation mechanical move systems was not fully determined at the time of this publication.

This document does not define hardware or software requirements for any of the systems to which it applies. It only concerns externally visible interfaces and places no restriction on the underlying implementations. It has been designed to avoid interference with proprietary solutions subjected to intellectual property. From the point of view of the data exchange, and to guarantee interoperability based on the previous premises, this document defines three communication interfaces (interface with management, interface with events and interface with subsystems) and the architecture to which these interfaces apply. Three levels of architecture has been defined to accommodate these interfaces:

- The Management Level, where any MIS conforming with this document is located. Out of all available data exchange methods, each MIS only implements those required to execute its functionalities.
- The Higher Control Level: coordination. At this level is performed the data integration among RMCS and the access control to it. A software element, called coordination broker, ensures this integration and allows the use of different technologies in its interfaces.
- The Lower Control Level: RMCS. These can also be referred to as irrigation subsystems. The RMCS perform the duties of the irrigation entity(s) under its control.

A coordination broker can be developed as a product by any of these manufacturers or by an independent developer using the standard specifications for this kind of software.

2 Normative reference

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 8601, *Data elements and interchange formats. Information interchange — Representation of dates and times*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

3.1 action

application of a *method* (3.7) to exchange data leading to accomplish typical irrigation duties

3.2 coordination broker

message broker pattern application responsible for the mapping of irrigation entities, for the collection and consolidation of their data, and for the management of the *procedural elements* (3.13) executed by them

Note 1 to entry: It shall conform with the management, *subsystems* (3.20) and events interfaces.

3.3 interface with events

functional connection that enables the exchange of information about events (according to IEC 62682) between the *coordination broker* (3.2) and the *subsystems* (3.20)

3.4 interface with management

functional connection that enables the exchange of information between MIS applications and the *coordination broker* (3.2)

3.5 interface with subsystems

functional connection that enables the exchange of information between the *coordination broker* (3.2) and the *subsystems* (3.20)

3.6 message broker pattern

architectural software pattern for message validation, transformation and routing

Note 1 to entry: A message broker is a software product designed as an intermediary to facilitate interactions between third-party applications. The message broker can also be called interface engine or integration broker.

3.7 method

mechanisms established for the exchange of data between interoperable systems

3.8 MIS application

computer program aimed at administrative and/or Operational decision-making in the irrigation entities

Note 1 to entry: A MIS is a tool acquired for an organization (like a User Community or an Irrigator) to execute one or more of the following specific functions (This list is descriptive and not restrictive.):

- administrative control;
- accounting control;
- maintenance;
- behavior modeling;
- operational management; and
- any other purpose aiming at improving decision-making.

3.9

optional conditioned parameter

parameter (3.12) that can be used once a conditioning parameter of an *action* (3.1) is set up

3.10

optional conditioning parameter

parameter (3.12) set up as a part of an *action* (3.1), that requires the activation of one or more additional required or *optional conditioned parameters* (3.9)

3.11

optional parameter

parameter (3.12) that is not required but can be activated for an *action* (3.1) without requiring the support of additional parameters

3.12

parameter

basic information contained by an *action* (3.1) in the interfaces

3.13

procedural element

specific application of a recipe in an irrigation entity

3.14

procedural model

representation of the reality used to describe the different parts [*procedural elements* (3.13)] of the process to be performed by the elements included in the physical model

3.15

property

required attribute to define an irrigation entity

Note 1 to entry: Note the difference between a parameter, which characterizes an *action* (3.1), and a property, which characterizes an entity

3.16

required parameter

parameter that shall be included when an *action* (3.1) is set up

3.17

required conditioned parameter

parameter required when an *action* (3.1) is set up including an optional or required conditioning parameter

3.18

physical model

representation of the reality used to describe the relations, dependences and hierarchy among the physical assets designed to perform a process

Note 1 to entry: The model is divided in seven levels, being the three upper levels focused on administrative purposes and the four lower levels in the process to be performed.

3.19

standard history

recorded set of values of a *property* (3.15) covering a daily time interval and recorded according to a predefined frequency

3.20

subsystem

term used by RMCS in terms of interoperability

Note 1 to entry: A remote monitoring and control system for irrigation (RMCS), is a set of hardware devices and software programs used to monitor and/or control – according to predefined parameters or user decisions – one or more irrigation entities. Typical components of a RMCS include:

- control software, linking data transmission/acquisition and process control;
- devices controlling or monitoring irrigation entities;
- other intermediate devices required for data integration and/or communication purposes.

4 Interoperability I: System architecture

4.1 Levels and components of an interoperable architecture

4.1.1 General

ISO 21622-3:2024

<https://standards.iteh.ai/catalog/standards/iso/f57a884e-cf88-4273-af73-39a5ce4b0a12/iso-21622-3-2024>

The levels and components are presented in Figure 1.

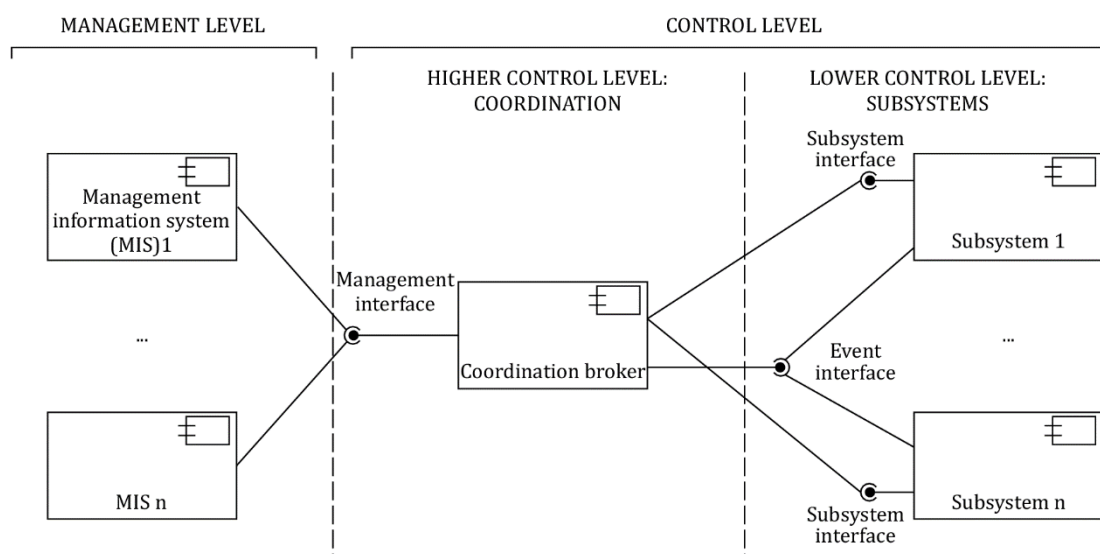


Figure 1 — Levels and components of an interoperable architecture

These architecture levels can be used by irrigators or user communities. Both uses the architecture defined in this document to integrate those management tools and subsystems involved in the management and control of his/her/its own property irrigation entities.

However, it is possible to enable other permissions to facilitate the exchange of data with third parties, always with the prior authorization of the data owner.

4.1.2 Control level

The control level comprises:

- the coordination broker; and
- one or more subsystems.

The subsystem interface is established between these two components.

4.1.2.1 Subsystem

The control of an irrigation entity, understood as the acquisition and continuous monitoring of process variables, execution of operations, changes of set points and emergency stops, among others, is always performed at the subsystem level.

4.1.2.2 Coordination broker

The coordination broker performs the following basic functions:

- mapping irrigation entities and their association to the subsystems controlling them;
- establishing an abstraction layer so that MIS applications do not require information on the subsystems responsible for each irrigation entity;
- collecting and consolidating properties, histories, events and procedural elements inherent to irrigation entities;
- coordinating subsystems, providing them with the information they may require, regardless of its origin;
- managing access permissions among the different components integrated in the interoperable architecture; and
- managing the access to irrigation entities and available methods for any component integrated in the interoperable architecture.

4.1.3 Management level

This level comprises all computer applications necessary for the efficient operation of the hydraulic infrastructure, as well as the processes required for the optimum use of water and energy. MIS applications retrieves the data they require from the control level.

The management interface is established between the management level and the upper control level.

4.2 Interface specifications

4.2.1 General

All data exchanged between the architecture levels defined shall be in accordance with the specifications included in this document.

The specifications in this document are not tied to any specific implementation, and only establish the foundations and minimum criteria required to guarantee an effective interoperability performance. The application of this document requires a specific communications protocol at the choice of the manufacturer or developer and adapted to its particular needs. The communication protocol, as well as the security criteria for all the defined interfaces, shall be in accordance with the proposed implementation annexes, Annexes A, B, C for SOAP Web Services or Annexes F, G or H for REST Web Services, depending on the communication protocol selected by the manufacturer.

4.2.2 Data access authorizations

All the interfaces defined in this document shall be secured using authorization systems appropriate for the technology or protocol to be implemented in order to identify the data consumer. The implementation annexes establish the security requirements to be applied in each case.

Any data consumer wishing to use a certain interface shall authenticate itself. The authentication methods to be used for interface access are those described in the implementation annexes.

From its user interface, and in addition to the authorization requirements established, any element of the interoperable architecture (MIS applications, coordination brokers and subsystems) should manage the access permissions for authorized consumers when using its interfaces, allowing:

- the creation of new permissions;
- the deletion of permissions; and
- the modification of this permissions.

[ISO 21622-3:2024](https://standards.iteh.ai/catalog/standards/iso/f57a884e-cf88-4273-af73-39a5ce4b0a12/iso-21622-3-2024)

<https://standards.iteh.ai/catalog/standards/iso/f57a884e-cf88-4273-af73-39a5ce4b0a12/iso-21622-3-2024>

This permissions for a data consumer can include access levels restrictions related to:

- the accessible irrigation entities; and
- the allowed methods from those defined for each interface.

Any action not meeting these conditions should be denied.

4.2.3 Irrigation entity identification

The access to any irrigation entity, in all levels of the interoperable architecture, shall be performed using its EntityID, in order to guarantee its univoque identification. This identifier shall be unique among the irrigation entities of an irrigation system.

When introducing or modifying an irrigation entity, shall be checked that no duplicate irrigation entity identifiers (EntityIDs) exist.

4.2.4 Common methods to management and subsystem interfaces

4.2.4.1 General

Unless otherwise stated, all defined parameters are required and shall be separated by commas.

4.2.4.2 Writing a property of an entity (Write method)

Table 1 — Input parameters of the Write method

Input			
Name	Type	Description	Specification
ActionID	string	ID of the action.	Contains a character string that identifies the action. Generated and known by the element executing the method.
EntityID	string	ID of the entity where the user wishes to execute the action.	Contains a character string that corresponds to an irrigation entity. This is a unique ID within the system.
PropertyName	PropertyName	Name of the property on which the action shall be executed.	Contains one of the possible names from the list of entity properties.
Value	string	Value of the property to be written.	Contains a character string with the fields corresponding to the value of the property to be written, separated by commas. Only used for non read-only properties.

Table 2 — Output parameters of the Write method

Output			
Name	Type	Description	Specification
ActionID	string	ID of the action.	Same parameter included in action input.
Response	string	Response obtained.	Contains two fields separated by commas: Value1, Value2 Where: Value1: closed list of integer numbers identifying the response. Possible values: 0, 1, 2, 3, 4 and 5. Value2: closed list with explanatory texts corresponding to each Value1: If Value1=0, "Action successfully executed". Generated at recipient. If Value1=1, "Execution error". Generated at recipient. If Value1=2, "Lexical error". Generated at recipient. If Value1=3, "Not supported". Generated at recipient. If Value1=4, "Communication error". Generated by coordination when communication with reception subsystem is not obtained. If Value1=5, "Coordination error". Generated by coordination when there is a failure in the

Output			
Name	Type	Description	Specification
			application. Value2 might be extended using a hyphen with as many explanatory texts as errors can be discriminated by a subsystem or a coordination broker.

Properties admitting Write method are specified for each entity type. The Response shall have Value1=3 when executed on a read-only property (see Table 26).

4.2.4.3 Reading a property of an entity (Read method)

For the reading of the properties, it is the decision of the subsystem if it returns data stored in the database of its control application or if it forces communication with its remote controller(s) or terminal(s).

Table 3 — Input parameters of the Read method

Input			
Name	Type	Description	Specification
ActionID	string	ID of the action.	Contains a character string that identifies the action. Generated and known by the element executing the method.
EntityID	string	ID of the entity where the user wishes to execute the action.	Contains a character string that corresponds to a irrigation entity. It is a unique ID within the system.
PropertyName	Property Name	Name of the property on which the action shall be executed.	Contains one of the possible names from the list of properties of the entity.

Table 4 — Output parameters of the Read method

Output			
Name	Type	Description	Specification
ActionID	string	ID of the action.	Same element included in action input.
Response	string	Response obtained.	Contains two fields separated by commas: Value1, Value2 Where: Value1: closed list of integer numbers identifying the response. Possible values: 0, 1, 2, 3, 4 and 5. Value2: closed list with explanatory texts corresponding to each Value1: If Value1=0, "Action successfully executed". Generated at recipient. If Value1=1, "Execution error". Generated at recipient. If Value1=2, "Lexical error". Generated at recipient. If Value1=3, "Not supported". Generated at