

---

INTERNATIONAL STANDARD



2727

---

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

---

## Modular units for machine tool construction — Headstocks

First edition — 1973-11-15

ITeH STANDARD PREVIEW  
(standards.iteh.ai)

[ISO 2727:1973](https://standards.iteh.ai/catalog/standards/sist/cd658b3f-413e-4c11-a9f2-fb6890a533dd/iso-2727-1973)

<https://standards.iteh.ai/catalog/standards/sist/cd658b3f-413e-4c11-a9f2-fb6890a533dd/iso-2727-1973>



---

UDC 621.9

Ref. No. ISO 2727-1973 (E)

**Descriptors** : machine tools, elements, modular structures, multi-spindle head, dimensions, interchangeability.

Price based on 3 pages

## FOREWORD

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO Member Bodies). The work of developing International Standards is carried out through ISO Technical Committees. Every Member Body interested in a subject for which a Technical Committee has been set up has the right to be represented on that Committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the Technical Committees are circulated to the Member Bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 2727 was drawn up by Technical Committee ISO/TC 39, *Machine-tools*, and circulated to the Member Bodies in July 1972.

It has been approved by the Member Bodies of the following countries :

Australia	India
Belgium	Ireland
Czechoslovakia	Poland
Egypt, Arab Rep. of	Romania
Germany	South Africa, Rep. of
Hungary	Sweden

ISO 2727:1973

Switzerland

Thailand

Turkey

U.S.A.

The Member Bodies of the following countries expressed disapproval of the document on technical grounds :

France  
Japan  
United Kingdom

# Modular units for machine tool construction – Headstocks

## 1 SCOPE AND FIELD OF APPLICATION

This International Standard specifies certain dimensions relating to the interchangeability of headstocks used in special purpose machines constructed from modular units.

[ISO 2727:1973](https://standards.iteh.ai/catalog/standards/sist/cd658b3f-413e-4c11-a9f2-fb6890a533dd/iso-2727-1973)

<https://standards.iteh.ai/catalog/standards/sist/cd658b3f-413e-4c11-a9f2-fb6890a533dd/iso-2727-1973>

## 2 CLASSIFICATION AND DESIGNATION

The designation of each size of headstock is given by the nominal width of the saddle. Nine sizes are adopted, namely : 125, 160, 200, 250, 320, 400, 500, 630 and 800 mm.

## 3 SPECIFICATIONS

### 3.1 Range of nominal sizes from 125 to 250 mm

Dimensions shall be in accordance with Table 1.

Either a tenon drive or a shaft and key may be used.

The height of the centre of the driving spindle shall be in accordance with the values given in Table 1.

### 3.2 Range of nominal sizes from 320 to 800 mm

Dimensions shall be in accordance with Table 2.

Either a coupling, or gear drive, or any other suitable form of drive may be used.

The height of the centre of the driving spindle is not specified.

4 DIMENSIONS

4.1 Range 125 to 250 mm

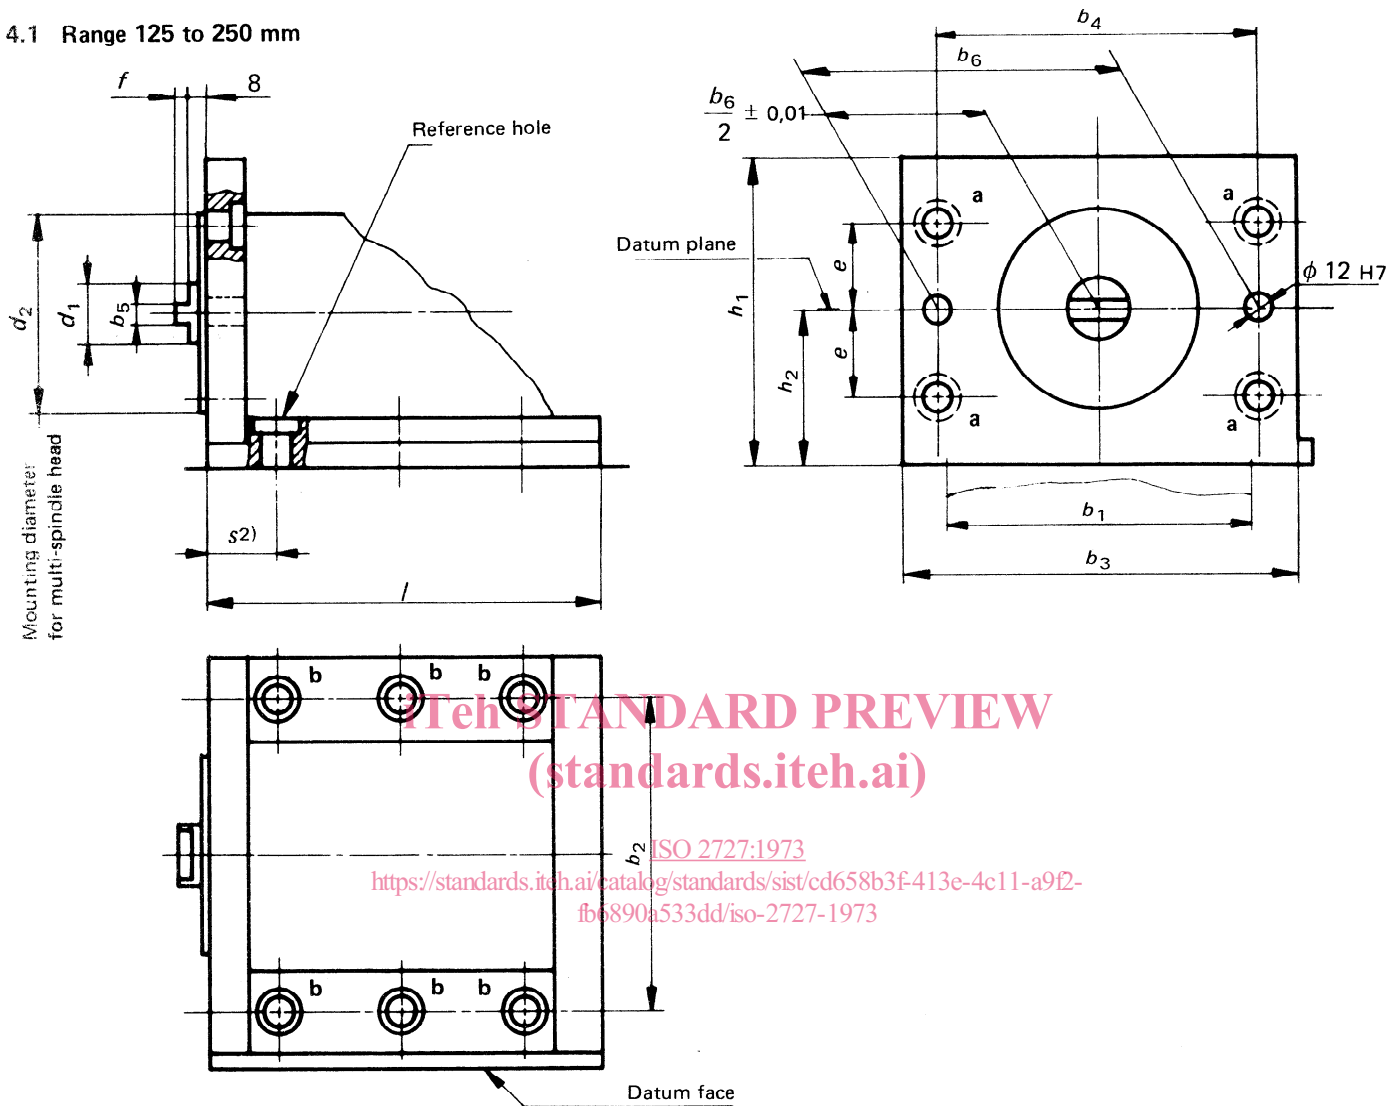


TABLE 1 – Dimensions for the range 125 to 250 mm

Dimensions in millimetres

Nominal dimension <sup>1)</sup> $b_1$	$b_2$ $\pm 0,2$	$b_3$	$b_4$ $\pm 0,2$	$b_5$ $e8$	$b_6$ $\pm 0,02$	$d_1$ <sup>3)</sup>	$d_2$ $j6$	$e$ $\pm 0,2$	$f$	$h_1$	$h_2$ $\pm 0,05$	$l$	Clearance holes $a$ and $b$ to suit thread size
125	100	160	130	8	130	25	80	35	6	125	63	160	M 10
160	135	200	170	8	170	32	80	50	6	160	80	200	M 10
200	170	250	220	12	220	40	100	65	10	200	100	250	M 12
250	220	320	290	12	290	50	100	90	10	250	125	320	M 12

- 1) Conforming to nominal width of saddle.
- 2)  $s = 25$  mm or whole multiples of 25 mm.
- 3) Two alternative methods of location are permitted :
  - a) by means of spigot  $d_2$  in association with one dowel hole, or
  - b) by means of two dowel holes and without using spigot  $d_2$ .

4.2 Range 320 to 800 mm

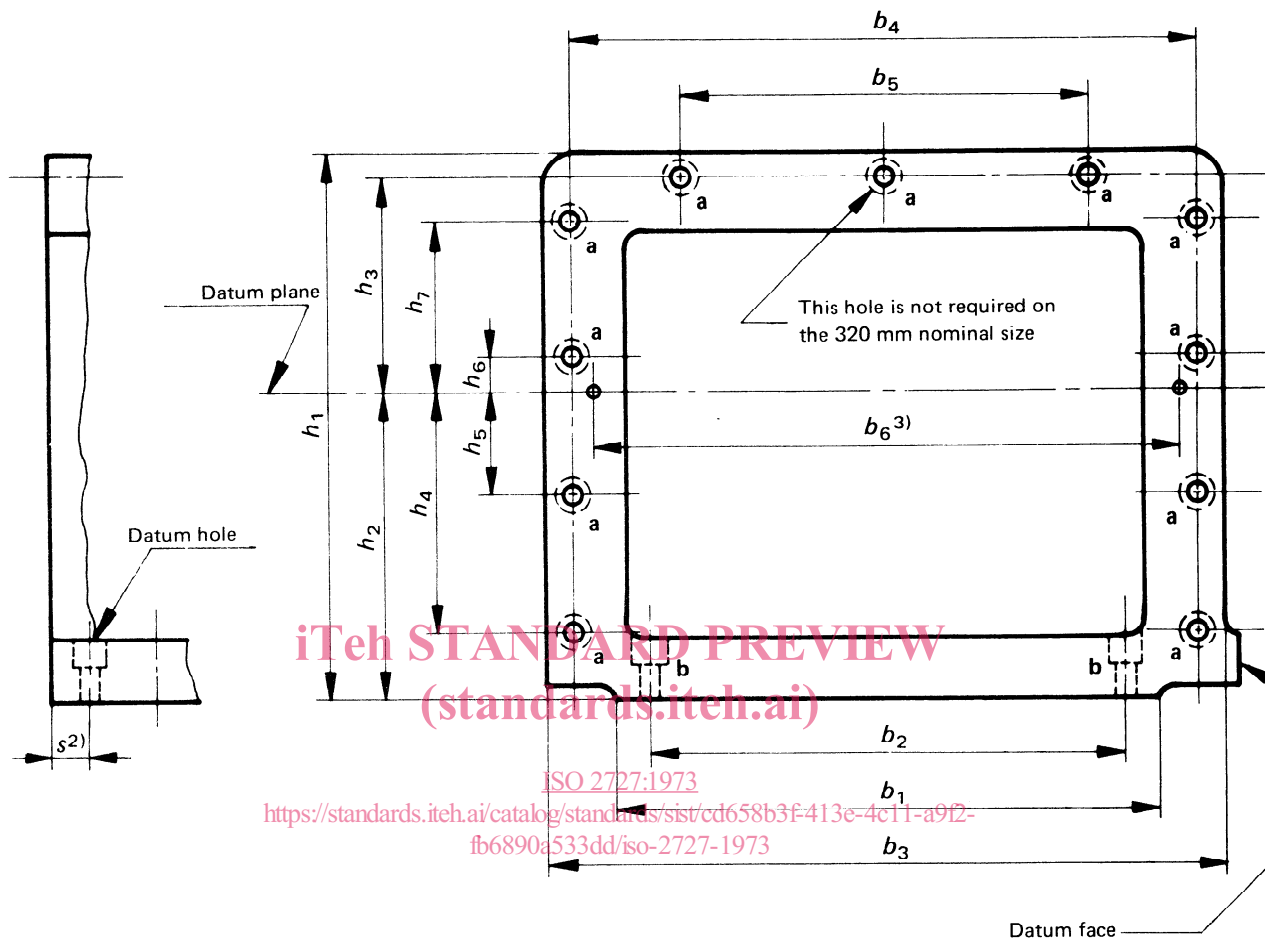


TABLE 2 – Dimensions for the range 320 to 800 mm

Dimensions in millimetres

Nominal size <sup>1)</sup> $b_1$	$b_2$ $\pm 0,2$	$b_3$	$b_4$ $\pm 0,2$	$b_5$ $\pm 0,2$	$h_1$	$h_2$ $\pm 0,05$	$h_3$ $\pm 0,2$	$h_4$ $\pm 0,2$	$h_5$ $\pm 0,2$	$h_6$ $\pm 0,2$	$h_7$ $\pm 0,2$	Clearance holes <i>a</i> and <i>b</i> to suit thread size
320	280	400	370	200	320	180	125	100	—	65	—	M 12
400	355	500	470	250	400	220	165	160	40	80	—	M 12
500	450	630	590	320	500	280	200	210	50	130	—	M 16
630	580	800	760	450	630	360	250	275	115	50	190	M 16
800	740	1 000	960	600	800	450	330	350	150	50	250	M 20

- 1) Conforming to nominal width of saddle.
- 2)  $s = 25$  mm or whole multiples of 25 mm.
- 3) Dimension  $b_6$  is left to national standards, as there are different manufacturing techniques used in various countries.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

This page intentionally left blank

[ISO 2727:1973](#)

<https://standards.iteh.ai/catalog/standards/sist/cd658b3f-413e-4c11-a9f2-fb6890a533dd/iso-2727-1973>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

This page intentionally left blank

[ISO 2727:1973](#)

<https://standards.iteh.ai/catalog/standards/sist/cd658b3f-413e-4c11-a9f2-fb6890a533dd/iso-2727-1973>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

This page intentionally left blank

[ISO 2727:1973](#)

<https://standards.iteh.ai/catalog/standards/sist/cd658b3f-413e-4c11-a9f2-fb6890a533dd/iso-2727-1973>