

ISO/TC 22/SC 31

Secretariat: DIN

Voting begins on:
2021-02-11

Voting terminates on:
2021-04-08

Road vehicles — Interchange of digital information on electrical connections between towing and towed vehicles —

Part 3: Application layer for equipment other than brakes and running gear

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Véhicules routiers — Échange d'informations numériques sur les connexions électriques entre véhicules tracteurs et véhicules tractés —

ISO/FDIS 11992-3

Partie 3: Couche d'application pour les équipements autres que les équipements de freinage et les organes de roulement

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.



Reference number
ISO/FDIS 11992-3:2021(E)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/FDIS 11992-3

<https://standards.iteh.ai/catalog/standards/sist/f2bf41a5-c080-4f11-978f-50dbf783e632/iso-fdis-11992-3>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	ix
Introduction	x
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Abbreviated terms	2
5 APP – Parameter specification	3
5.1 General definitions.....	3
5.2 Rear obstacle distance.....	3
5.3 Thermal body temperature.....	4
5.4 Obstacle detection device (ODD) request.....	4
5.5 Anti-theft device – Status request.....	4
5.6 Obstacle detection device (ODD) active.....	5
5.7 Anti-theft device – Measured.....	5
5.8 Vehicle type.....	5
5.9 Detailed vehicle type.....	6
5.10 Percent clutch slip.....	6
5.11 Current gear.....	7
5.12 Accelerator pedal low idle switch.....	7
5.13 Engine propulsion system control allowed.....	7
5.14 PTO control allowed.....	7
5.15 Tachograph vehicle speed.....	8
5.16 Engine propulsion system speed measured.....	8
5.17 Driver's demand engine propulsion system – Percent torque.....	8
5.18 Actual engine propulsion system – Percent torque.....	8
5.19 Transmission reference torque.....	9
5.20 Engine propulsion system percent load at current speed.....	9
5.21 Maximum vehicle speed limit.....	9
5.22 Engine propulsion system speed upper limit.....	9
5.23 Engine propulsion system speed lower limit.....	10
5.24 Engine propulsion system coolant temperature warning.....	10
5.25 Engine propulsion system oil pressure warning.....	10
5.26 Engine propulsion system oil temperature.....	11
5.27 Engine propulsion system coolant temperature.....	11
5.28 Engine propulsion system oil pressure.....	11
5.29 Torque converter oil temperature warning.....	11
5.30 Torque converter oil temperature.....	12
5.31 First clutch-dependent PTO feedback.....	12
5.32 Second clutch-dependent PTO feedback.....	12
5.33 Clutch-independent PTO feedback.....	12
5.34 First engine propulsion system-mounted PTO feedback.....	13
5.35 Second engine propulsion system-mounted PTO feedback.....	13
5.36 Starter active.....	13
5.37 Engine propulsion system running.....	14
5.38 Engine propulsion system torque mode.....	14
5.39 First clutch-dependent PTO switch.....	14
5.40 Second clutch-dependent PTO switch.....	14
5.41 Clutch-independent PTO switch.....	15
5.42 First engine propulsion system-mounted PTO switch.....	15
5.43 Second engine propulsion system-mounted PTO switch.....	15
5.44 Requested percent clutch slip.....	16
5.45 Starter lockout switch.....	16

5.46	Engine propulsion system start switch.....	16
5.47	Engine propulsion system stop switch.....	16
5.48	Requested engine propulsion system speed upper limit.....	17
5.49	Requested engine propulsion system speed lower limit.....	17
5.50	Requested engine propulsion system torque limit.....	17
5.51	Requested vehicle speed limit.....	18
5.52	Refuse packer step switch.....	18
5.53	Operating panel active.....	18
5.54	Requested engine propulsion system speed.....	19
5.55	Accelerator pedal position.....	19
5.56	Ambient Air temperature.....	19
5.57	Fuel level warning.....	19
5.58	Towed vehicle left-hand stop light(s).....	20
5.59	Towed vehicle right-hand stop light(s).....	20
5.60	Towed vehicle left-hand direction indicator light(s).....	20
5.61	Towed vehicle right-hand direction indicator light(s).....	21
5.62	Towed vehicle left-hand rear light(s).....	21
5.63	Towed vehicle right-hand rear position light(s).....	21
5.64	Towed vehicle left-hand rear fog light(s).....	21
5.65	Towed vehicle right-hand rear fog light(s).....	22
5.66	Towed vehicle left-hand reversing light(s).....	22
5.67	Towed vehicle right-hand reversing light(s).....	22
5.68	Towed vehicle left-hand side marker light(s).....	23
5.69	Towed vehicle right-hand side marker light(s).....	23
5.70	Towed vehicle left-hand rear width indicator light(s).....	23
5.71	Towed vehicle right-hand rear width indicator light(s).....	24
5.72	Towed vehicle left-hand corner marker light(s).....	24
5.73	Towed vehicle right-hand corner marker light(s).....	24
5.74	Towed vehicle left-hand rear registration-plate light(s).....	24
5.75	Towed vehicle right-hand rear registration-plate light(s).....	25
5.76	Towed vehicle rear warning light(s).....	25
5.77	Towed vehicle rotating identification light(s).....	25
5.78	Towed vehicle interior light(s).....	26
5.79	Towed vehicle work light(s).....	26
5.80	Body fluid level.....	26
5.81	Actual pressure.....	27
5.82	Towed vehicle rear black-out marker select light(s).....	27
5.83	Towed vehicle front black-out marker lamp select.....	27
5.84	Towed vehicle convoy lamp select.....	27
5.85	Towed vehicle convoy driving lamp select.....	27
5.86	Towed vehicle black-out brake/stop lamp select.....	27
5.87	Towed vehicle night vision illuminator select.....	28
5.88	Towed vehicle black-out work lamp select.....	28
5.89	Towed vehicle operators black-out intensity selection.....	28
5.90	Towed vehicle left hand black-out rear light(s).....	28
5.91	Towed vehicle right-hand black-out rear light(s).....	29
5.92	Towed vehicle left-hand black-out brake/stop light(s).....	29
5.93	Towed vehicle right-hand black-out brake/stop light(s).....	29
5.94	Towed vehicle rear convoy light(s).....	30
5.95	ODM version information.....	30
5.96	Identification data index.....	30
5.97	Identification data content.....	31
5.98	Velocity and yaw rate confidence level.....	31
5.99	OD status indicator.....	32
5.100	Cyclic redundancy check (CRC8).....	32
5.101	Sequence counter.....	33
5.102	Longitudinal speed.....	33
5.103	Lateral speed.....	34

STANDARD PREVIEW

(standardsfch.ai)

ISO 11992-3
<http://standards.fch.ai>
 ISO 11992-3:2021(E)
 080-411-9786

5.104	Yaw rate	34
5.105	Articulation angle	34
5.106	OD longitudinal distance object	36
5.107	OD lateral distance object	37
5.108	OD absolute longitudinal speed object	37
5.109	OD absolute lateral speed object	38
5.110	OD standard deviation of longitudinal and lateral distance	38
5.111	OD normal deviation of longitudinal and lateral speed	39
5.112	Track ID	40
5.113	Lane curve coefficients	40
5.114	Lane curve validity interval	42
5.115	Lane marker width	42
5.116	Standard deviation of lane information error	43
5.117	Lane marker type	43
5.118	Object width (dimension in lateral direction)	44
5.119	Object length (dimension in longitudinal direction)	44
5.120	Object classification	44
5.121	Geometric distance	45
5.122	Towed vehicle rear IR-black-out marker select	50
5.123	Towed vehicle IR-black-out stop lamp select	51
5.124	Towed vehicle IR-convoy light ('Leitkreuz') select	51
5.125	Towed vehicle right-hand IR-black-out rear light(s)	51
5.126	Towed vehicle left-hand IR-black-out rear light(s)	51
5.127	Towed vehicle right-hand IR-black-out stop light(s)	52
5.128	Towed vehicle left-hand IR-black-out stop light(s)	52
5.129	Towed vehicle IR-convoy light ('Leitkreuz')	52
5.130	Towed vehicle black-out work lamp(s)	53
5.131	Seconds	53
5.132	Minutes	53
5.133	Hours	54
5.134	Day	54
5.135	Month	54
5.136	Year	55
5.137	Local minute offset	55
5.138	Local hour offset	55
5.139	Trailer left-hand stop light(s)	56
5.140	Trailer right-hand stop light(s)	56
5.141	Trailer left-hand direction indicator light(s)	56
5.142	Trailer right-hand direction indicator light(s)	57
5.143	Trailer left-hand rear light(s)	57
5.144	Trailer right-hand rear light(s)	57
5.145	Trailer left-hand rear fog light(s)	57
5.146	Trailer right-hand rear fog light(s)	58
5.147	Trailer left-hand reversing light(s)	58
5.148	Trailer right-hand reversing light(s)	58
5.149	Trailer left-hand side marker light(s)	59
5.150	Trailer right-hand side marker light(s)	59
5.151	Trailer left-hand rear width indicator light(s)	59
5.152	Trailer right-hand rear width indicator light(s)	60
5.153	Trailer left-hand corner marker light(s)	60
5.154	Trailer right-hand corner marker light(s)	60
5.155	Trailer left-hand rear registration-plate light(s)	60
5.156	Trailer right-hand rear registration-plate light(s)	61
5.157	Trailer rear warning light(s)	61
5.158	Trailer rotating identification light(s)	61
5.159	Trailer interior light(s)	62
5.160	Trailer work light(s)	62
5.161	Trailer left-hand stop light(s) redundancy function	62

5.162	Trailer right-hand stop light(s) redundancy function.....	63
5.163	Trailer left-hand direction indicator light(s) redundancy function.....	63
5.164	Trailer right-hand direction indicator light(s) redundancy function.....	63
5.165	Trailer left-hand rear light(s) redundancy function.....	64
5.166	Trailer right-hand rear light(s) redundancy function.....	64
5.167	Trailer left-hand reversing light(s) redundancy function.....	64
5.168	Trailer right-hand reversing light(s) redundancy function.....	65
5.169	Transmission output shaft PTO feedback.....	65
5.170	Transfer case output shaft PTO feedback.....	65
5.171	At least one PTO engaged.....	65
5.172	Transmission output shaft PTO switch.....	66
5.173	Transfer case output shaft PTO switch.....	66
5.174	First clutch-dependent PTO engagement consent.....	66
5.175	Second clutch-dependent PTO engagement consent.....	67
5.176	Clutch-independent PTO engagement consent.....	67
5.177	First engine propulsion system mounted PTO engagement consent.....	67
5.178	Second engine propulsion system mounted PTO engagement consent.....	68
5.179	Transmission output shaft PTO engagement consent.....	68
5.180	Transfer case output shaft PTO engagement consent.....	68
5.181	First clutch-dependent PTO engagement consent – Trailer.....	69
5.182	Second clutch-dependent PTO engagement consent – Trailer.....	69
5.183	Clutch-independent PTO engagement consent – Trailer.....	69
5.184	First engine propulsion system mounted PTO engagement consent – Trailer.....	70
5.185	Second engine propulsion system mounted PTO engagement consent – Trailer.....	70
5.186	Transmission output shaft PTO engagement consent – Trailer.....	70
5.187	Transfer case output shaft PTO engagement consent – Trailer.....	71
5.188	Cargo hold temperature 1.....	71
5.189	Cargo hold temperature 2.....	71
5.190	Cargo hold temperature 3.....	72
5.191	Cargo hold temperature 4.....	72
5.192	Cargo hold temperature 5.....	72
5.193	Cargo hold temperature 6.....	73
5.194	Reefer unit battery voltage.....	73
5.195	Reefer unit fuel tank level.....	73
5.196	Requested evaporator 1 set-point.....	74
5.197	Requested evaporator 2 set-point.....	74
5.198	Requested evaporator 3 set-point.....	74
5.199	Evaporator 1 set-point.....	75
5.200	Evaporator 2 set-point.....	75
5.201	Evaporator 3 set-point.....	75
5.202	Compartment 1 humidity.....	76
5.203	Compartment 2 humidity.....	76
5.204	Compartment 3 humidity.....	76
5.205	Compartment 1 oxygen concentration.....	77
5.206	Compartment 2 oxygen concentration.....	77
5.207	Compartment 3 oxygen concentration.....	77
5.208	Reefer unit alarm status.....	78
5.209	Status evaporator 1.....	78
5.210	Status evaporator 2.....	78
5.211	Status evaporator 3.....	79
5.212	Reefer unit status.....	79
5.213	Reefer unit start/stop operating hours.....	79
5.214	Reefer unit diesel engine propulsion system operating hours.....	80
5.215	Reefer unit line supply operating hours.....	80
5.216	Reefer unit generator operating hours.....	80
5.217	Reefer unit on/off.....	81
5.218	Reefer unit defrost cycle on/off.....	81
5.219	Cargo hold door 1 contact switch.....	81

5.220	Cargo hold door 2 contact switch	82
5.221	Cargo hold door 3 contact switch	82
6	PG specification	82
6.1	Towing vehicle	82
6.1.1	General requirements	82
6.1.2	Overview of towing vehicle PGs	83
6.1.3	CANopen messages	84
6.1.4	General purpose message #1/1 (GPM11)	85
6.1.5	General purpose message #1/2 (GPM12)	85
6.1.6	General purpose message #1/3 (GPM13)	86
6.1.7	General purpose message #1/4 (GPM14)	86
6.1.8	General purpose message #1/5 (GPM15)	87
6.1.9	General purpose message #1/6 (GPM16)	88
6.1.10	General purpose message #1/7 (GPM17)	88
6.1.11	General purpose message #1/8 (GPM18)	89
6.1.12	General purpose message #1/9 (GPM19)	90
6.1.13	Military application message #1/1 (MAM11)	90
6.1.14	Time/Date message #1/1 (TD11)	91
6.1.15	Object detection message #1/1 (ODM11)	91
6.2	Towed vehicle	92
6.2.1	General requirements	92
6.2.2	Overview of towed vehicle messages	93
6.2.3	General purpose message #2/1 (GPM21)	94
6.2.4	General purpose message #2/2 (GPM22)	94
6.2.5	General purpose message #2/3 (GPM23)	95
6.2.6	General purpose message #2/4 (GPM24)	95
6.2.7	General purpose message #2/5 (GPM25)	96
6.2.8	General purpose message #2/6 (GPM26)	97
6.2.9	General purpose message #2/7 (GPM27)	98
6.2.10	General purpose message #2/8 (GPM28)	98
6.2.11	General purpose message #2/9 (GPM29)	99
6.2.12	General purpose message #2/10 (GPM210)	100
6.2.13	General purpose message #2/11 (GPM211)	100
6.2.14	Military application message #2/1 (MAM21)	100
6.2.15	Object detection message #2/1 (ODM21)	101
6.2.16	Object detection message #2/2 (ODM22)	102
6.2.17	Object detection message #2/3 (ODM23)	102
6.2.18	Object detection message #2/4 (ODM24)	103
6.2.19	Object detection message #2/5 (ODM25)	104
6.2.20	Object detection message #2/6 (ODM26)	104
6.2.21	Object detection message #2/7 (ODM27)	105
6.2.22	Object Detection message #2/8 (ODM28)	105
6.2.23	Object detection message #2/9 (ODM29)	106
6.2.24	Object detection message #2/10 (ODM210)	107
6.2.25	Object detection message #2/11 (ODM211)	107
6.2.26	Object detection message #2/12 (ODM212)	108
6.2.27	Object detection message #2/13 (ODM213)	108
6.2.28	Object detection message #2/14 (ODM214)	109
6.2.29	Object detection message #2/15 (ODM215)	110
6.2.30	Object detection message #2/16 (ODM216)	110
6.2.31	Object detection message #2/17 (ODM217)	111
6.2.32	Object detection message #2/18 (ODM218)	111
6.2.33	Object detection message #2/19 (ODM219)	112
6.2.34	Object detection message #2/20 (ODM220)	113
6.2.35	Object detection message #2/21 (ODM221)	113
7	Application	114
7.1	General requirements	114

7.2	Address assignment.....	114
7.3	Address assignment method of a towing and towed vehicle.....	115
7.4	Vehicle node capabilities.....	115
7.5	Parameter attributes.....	116
8	AL – Application layer.....	116
8.1	AL – Message PDU format.....	116
8.2	AL – Message routing.....	117
8.3	AL – Parameter specification.....	117
8.3.1	AL – General.....	117
8.3.2	AL – Parameter attribute ranges.....	117
9	PL – Presentation layer.....	117
10	AL – ODM requirements.....	117
10.1	AL – Message latency.....	117
10.2	AL – Object selection.....	118
10.2.1	AL – General.....	118
10.2.2	AL – On the side of the vehicle.....	118
10.2.3	AL – Behind the vehicle.....	118
10.2.4	AL – Further objects.....	118
10.3	AL – Error handling.....	118
Annex A (informative) Object detection (OD) sensor states.....		120
Annex B (informative) Message flow.....		128
Bibliography.....		133

iTeh STANDARD PREVIEW
(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/f2bf41a5-c080-4f11-978f-50dbf783e632/iso-fdis-11992-3>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 31, *Data communication*.

This third edition cancels and replaces the second edition (ISO 11992-3:2003), which has been technically revised. It also incorporates the Amendment(s) ISO 11992-3:2003/Amd. 1:2008.

The main changes compared to the previous edition are as follows:

- introduced requirements structure;
- [Clause 7](#): added new parameters;
- [Clause 8](#): added new messages;
- added [Annex A](#) (informative) object detection (OD) sensor states; and
- added [Annex B](#) (informative) message flow.

A list of all parts in the ISO 11992 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

The ISO 11992 series specifies the interchange of digital information between road vehicles with a maximum authorised total mass greater than 3 500 kg, and towed vehicles, including communication between towed vehicles in terms of parameters and requirements of the lower OSI layers (physical and data link layer) of the electrical connection used to connect the electrical and electronic systems.

This document is structured according to the Open Systems Interconnection (OSI) Basic Reference Model, in accordance with ISO/IEC 7498-1 and ISO/IEC 10731,^[5] which structures communication systems into seven layers. When mapped on this model, the application layer protocol and data link layer framework requirements specified/referenced in the ISO 11992 series are structured according to [Figure 1](#).

[Figure 1](#) illustrates a simplified communication framework:

- vehicle normal communication framework,
- vehicle diagnostic communication framework,
- vehicle-specific use case framework, and the
- vehicle lower-layers framework.

The vehicle normal communication framework is composed of ISO 11992-2 and ISO 11992-3.

The vehicle diagnostic communication framework is composed of ISO 14229-1,^[8] ISO 14229-2,^[9] ISO 14229-3 ^[10] and ISO 11992-4^[6].

The vehicle-specific use case framework is composed of ISO 11992-4,^[6] ISO 22901-1^[13] or vehicle manufacturer-specific diagnostic data definition.

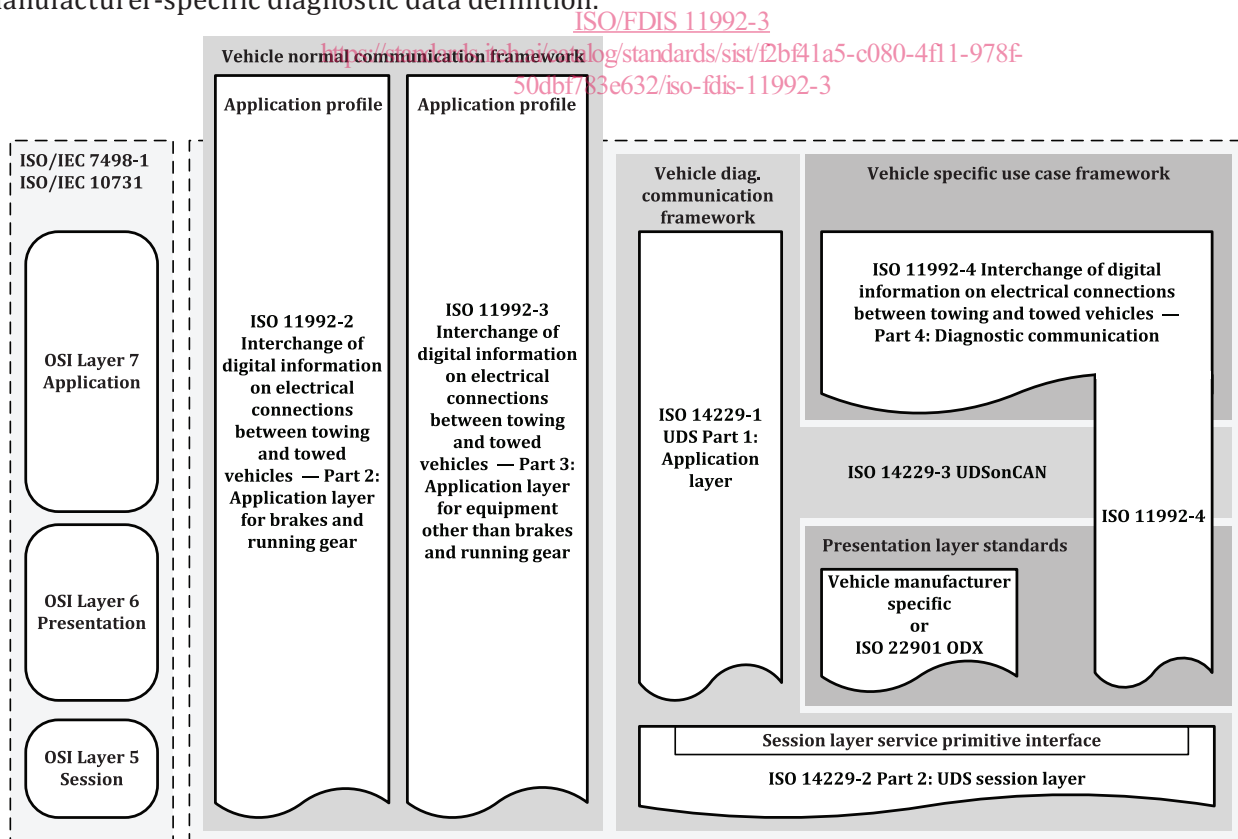


Figure 1 — ISO 11992 documents reference according to the OSI model

Road vehicles — Interchange of digital information on electrical connections between towing and towed vehicles —

Part 3: Application layer for equipment other than brakes and running gear

1 Scope

This document specifies the application layer, the payload of messages, and parameter groups for equipment other than brakes and running gears, to ensure the interchange of digital information between road vehicles with a maximum authorized total mass greater than 3 500 kg and their towed vehicles, including communication between towed vehicles.

This document supports the parameters and message sets for object detection (OD). The installation of the object detection (OD) device compliant to this document in the towed vehicle is identified by a dedicated message.

Additionally, some lighting parameters and messages are specified.

The conformance and interoperability test plans are not part of this document.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 612, *Road vehicles — Dimensions of motor vehicles and towed vehicles — Terms and definitions*

ISO/IEC 8859-1, *Information technology — 8-bit single-byte coded graphic character sets — Part 1: Latin alphabet No. 1*

ISO 11992-1, *Road vehicles — Interchange of digital information on electrical connections between towing and towed vehicles — Part 1: Physical and data-link layers*

ISO 11992-2, *Road vehicles — Interchange of digital information on electrical connections between towing and towed vehicles — Part 2: Application layer for brakes and running gear*

ISO 80000-1, *Quantities and units — Part 1: General*

SAE J1939-21, *Data Link Layer*

SAE J1939-71:2020, *Vehicle Application Layer*

SAE J1939-DA, *J1939 Digital Annex*

SAE J1850, *Class B Data Communications Network Interface*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 11992-1 and the following apply.

ISO/FDIS 11992-3:2021(E)

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

3.1

mean value

sum of all sample values divided by the number of samples

Note 1 to entry: to entry:

$$\bar{x} = \frac{\sum_{i=1}^N x_i}{N}$$

where

$\{x_1, x_2, \dots, x_N\}$ are the observed values of the sample items;

N is the number of observations in the sample.

3.2

standard deviation

positive square root of the variance

Note 1 to entry: to entry:

$$s = \sqrt{\frac{\sum_{i=1}^N (x_i - \bar{x})^2}{N-1}}$$

where

x is the sample value;

\bar{x} is the mean value;

i is the sample counter;

N is the number of observations in the sample.

[SOURCE: IEC Electropedia, 103-08-13, modified — Note 1 to entry has been added.]

3.3

trailer

towed or towing vehicle but not a commercial vehicle

4 Abbreviated terms

ABS	anti-lock braking system
APP	application
ASR	anti-spin regulation (traction control system)
CAN	controller area network
DA	destination address

DP	data page
ECU	electronic control unit
ERR	error
GE	group extension
GPM	general purpose messages
MSB	most significant bit/byte
N/A	not applicable
OD	object detection
ODM	object detection message
ODD	obstacle detection device
P	priority
PDU	protocol data unit
PDU1	PDU send in unicast
PDU2	PDU send in broadcast/multicast
PF	PDU format
PGN	parameter group number
PS	PDU-specific
PTO	power take-off
R	reserved
SA	source address
SLOT	scaling, limit, offset and transfer function
SNA	signal not available
SPN	suspect parameter number

STANDARD PREVIEW
(standards.iteh.ai)
ISO/FDIS 11992-3
<https://standards.iteh.ai/catalog/standards/sist/f2bf41a5-c080-4f11-978f-50dbf783e632/iso-fdis-11992-3>

5 APP – Parameter specification

5.1 General definitions

Interpretation of suspect parameter values are specified in SAE J1939-71. Parameter ranges are of 1-byte, 2-byte, and 4-byte in size. Discrete and control command (status) parameters are coded as 2-bit values.

5.2 Rear obstacle distance

This parameter indicates the actual distance between the back of the towed vehicle and any obstacle.

REQ	7.1 APP – Parameter specification – Rear obstacle distance
Table 1 specifies the parameter attributes.	

Table 1 — Rear obstacle distance attributes

Attribute	Value
Data length	1 byte
Resolution	2 cm per bit
Offset	0 cm
Data range	0 cm to 500 cm
Type	measured

5.3 Thermal body temperature

This parameter indicates the actual temperature in a thermal body on the towed vehicle.

REQ	7.2 APP – Parameter specification – Thermal body
Table 2 specifies the parameter attributes.	

Table 2 — Thermal body attributes

Attribute	Value
Data length	1 byte
Resolution	1 °C per bit
Offset	-125 °C
Data range	-125 °C to +125 °C
Type	measured

5.4 Obstacle detection device (ODD) request

ISO/FDIS 11992-3
<https://standards.iteh.ai/catalog/standards/sist/f2bf41a5-c080-4f11-978f-6a1b8351c01e/iso-11992-3-2021>

This parameter indicates the command signal to switch on or off the ODD.

REQ	7.3 APP – Parameter specification – Obstacle detection device (ODD) request
Table 3 specifies the parameter attributes.	

Table 3 — Obstacle detection device (ODD) request attributes

Attribute	Value
Data length	2 bit
Data range	00 ₂ : ODD off 01 ₂ : ODD on
Type	status

5.5 Anti-theft device – Status request

This parameter indicates the command signal to activate the anti-theft device.

REQ	7.4 APP – Parameter specification – Anti-theft device – Status request
Table 4 specifies the parameter attributes.	

Table 4 — Anti-theft device – Status request attributes

Attribute	Value
Data length	2 bit

Table 4 (continued)

Attribute	Value
Data range	00 ₂ : off 01 ₂ : on
Type	status

5.6 Obstacle detection device (ODD) active

This parameter indicates that an ODD is active/inactive.

REQ	7.5 APP – Parameter specification – Obstacle detection device (ODD) active
	Table 5 specifies the parameter attributes.

Table 5 — Obstacle detection device (ODD) active attributes

Attribute	Value
Data length	2 bit
Data range	00 ₂ : inactive 01 ₂ : active
Type	measured

5.7 Anti-theft device – Measured

This parameter indicates that the anti-theft device is switched on or off.

REQ	7.6 APP – Parameter specification – Anti-theft device – Measured
	Table 6 specifies the parameter attributes.

Table 6 — Anti-theft device – Measured attributes

Attribute	Value
Data length	2 bit
Data range	00 ₂ : off 01 ₂ : on
Type	measured

5.8 Vehicle type

This parameter indicates the information to identify a dolly axle within a road train.

REQ	7.7 APP – Parameter specification – Vehicle type
	Table 7 specifies the parameter attributes.

Table 7 — Vehicle type attributes

Attribute	Value
Data length	2 bit
Data range	00 ₂ : towing (tractor) or towed (trailer) 01 ₂ : trailer
Type	measured